




# ESSENTIALS ROND-FLAT (01)

## STATIC WHITE

24VDC Linear Fixtures - Surface



- Surface mount linear fixture
- Choose from diffused, frosted or clear lens options
- Unique round profile can be rotated up to 45° in field with included mounting clips
- Stainless steel mounting clips
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
				STD							SST			

Sample Part Number: RD1SW-5.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E


<b>1</b> <b>PRODUCT</b>  RD1SW RD1SW-USA  Select USA option for BAA and BABA projects. SW and SW-HE only. Only DRY ratings apply.  See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft  3.0HE+ 3.0W/ft HE+ 6.0HE+ 6.0W/ft HE+  1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft	<b>3</b> <b>CCT</b>  20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K  27 2700K 30 3000K 35 3500K 40 4000K  24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	<b>4</b> <b>RATED</b>  DRY IP20  DMP IP54	<b>5</b> <b>EFFICIENCY</b>  STD Standard	<b>6</b> <b>LENS</b>  DF Diffused FR Frosted CL Clear  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed  P1 Pass Through 1 (Input/output) - End Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black N/A For Barrel		
		BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated N/A For Barrel  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  SST Stainless Steel	<b>13</b> <b>FINISH</b>  ST Satin BK Black CU Custom  Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



# ESSENTIALS ROND-FLAT (01) STATIC WHITE

## 24VDC Linear Fixtures - Surface

### 1 PRODUCT - DIMENSIONS

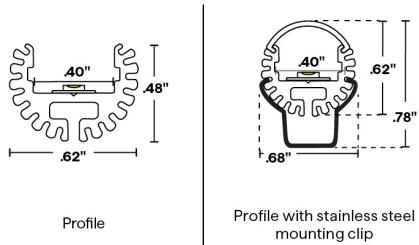


### 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 50000 for HE+]

Tested with RD1SV-\*\*-30-DRY-STD

	1.5 W/FT		3.0 W/FT		3.0HE+ W/FT		4.0 W/FT		5.0 W/FT		6.0HE+ W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	143	98	249	98	487	92	309	98	376	98	899	92
FR	140	98	243	98	476	92	303	98	368	98	880	92
DF	122	98	213	98	416	92	264	98	322	98	769	92

### 6 DIODE VISIBILITY

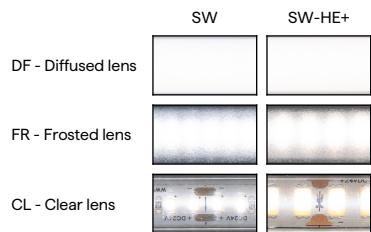

### PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



Clear 93°



# ESSENTIALS ROND-FLAT (01) STATIC WHITE

## 24VDC Linear Fixtures - Surface

### TEMPERATURE RATINGS

		1.5 W/FT		3.0 W/FT		3.0 HE+ W/FT		4.0 W/FT		5.0 W/FT		6.0 HE+ W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	125°F	-13°F	130°F	-4°F	125°F	-4°F	115°F	-13°F	105°F
DMP	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	**	**	-4°F	120°F	-4°F	110°F	**	**


### 7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output)




End Feed


### CONFIGURATION OPTIONS




Single End Feed



Connection by others  
Non-Continuous End Feed




Connection by others  
Non-Continuous Corner Feed




Continuous End to End Feed

### 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



Bare Wire 24"  
22 AWG




Barrel 6" - DRY/DMP  
22 AWG



6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

### 10 WIRE COLOR



White

Black




# ESSENTIALS ROND-FLAT (01) STATIC WHITE

## 24VDC Linear Fixtures - Surface

### 12 MOUNTING

SST



Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-07

Each clip comes with a #4 x 5/8" Flat Head SS

### 13 FINISH



Satin

Black


Custom finishes require a longer lead time, consult factory

### 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

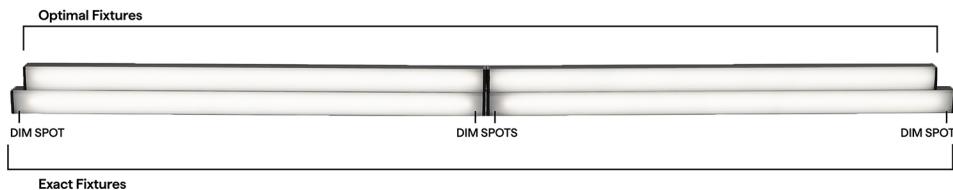

### SW DRY DMP LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture S1 End Feed
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 S1 End Feed	P1 P1 OUT → End Feed
12"	11.59"	11.34"
13"	12.59"	12.34"
14"	13.59"	13.34"
15"	14.59"	14.34"
16"	15.59"	15.34"
17"	16.59"	16.34"
18"	17.59"	17.34"
19"	18.59"	18.34"
20"	19.59"	19.34"
21"	20.59"	20.34"
22"	21.59"	21.34"
23"	22.59"	22.34"
24"	23.59"	23.34"
36"	35.59"	35.34"
48"	47.59"	47.34"
60"	59.59"	59.34"
72"	71.59"	71.34"
84"	83.59"	83.34"
96"	95.59"	95.34"



# ESSENTIALS ROND-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface

## SW-HE+ DRY LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

### OPTIMAL LENGTH

Requested Nominal Length	S1	P1
	IN	OUT
12"	11.59"	11.34"
13"	12.59"	12.34"
14"	13.59"	13.34"
15"	14.59"	14.34"
16"	15.59"	15.34"
17"	16.59"	16.34"
18"	17.59"	17.34"
19"	18.59"	18.34"
20"	19.59"	19.34"
21"	20.59"	20.34"
22"	21.59"	21.34"
23"	22.59"	22.34"
24"	23.59"	23.34"
36"	35.59"	35.34"
48"	47.59"	47.34"
60"	59.59"	59.34"
72"	71.59"	71.34"
84"	83.59"	83.34"
96"	95.59"	95.34"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle



# ESSENTIALS ROND-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface

INDOOR		
DIMMING PROTOCOL	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)	QTM-eLED(E)
DMX	QZ-DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-S</b>	<b>HINGE - HMB-M</b>	<b>HINGE - HMB-L</b>	<b>HINGE - HMB-XL</b>	<b>Q-PIVOT</b>	<b>Q-ANGLE</b>
.141" .51"	1.41" .71"	1.46" 1.29"	1.46" 4"	75° 1.03"	2.23" 1.38"

Adjustable mounting bracket - Small      Adjustable mounting bracket - Medium      Adjustable mounting bracket - Large      Adjustable mounting bracket - XLarge      Small mounting accessory      Adjustable mounting accessory