




ESSENTIALS TALO-FLAT (01)

STATIC WHITE

24VDC Linear Fixtures - Surface



INFORMATION REQUIRED FOR LIGHTING SCHEDULE

| 1 | 2 | 3 | 4 | 5 | 6 |
|---------|-----------|-----|-------|------------|------|
| PRODUCT | WATTS/ FT | CCT | RATED | EFFICIENCY | LENS |
| TO1SW | | | | STD | |

ADDITIONAL INFORMATION REQUIRED TO ORDER

| 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
|-------------------|-------------------|--------------------|------------|-----------|----------|--------|-------------|---------------|
| WIRE INPUT/OUTPUT | CONNECTOR/WIRE IN | CONNECTOR/WIRE OUT | WIRE COLOR | WIRE TYPE | MOUNTING | FINISH | LENGTH (IN) | EXACT/OPTIMAL |
| | | | | | | | | |

Sample Part Number: TO1SW-5.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-HSS-BK-48"-E

| | | | | | |
|--|---|--|---|---|--|
| 1 PRODUCT TO1SW TO1SW-USA Select USA option for BAA and BABA projects. Only DRY or WET ratings apply. See following pages for compatible power supplies. | 2 WATTS/FT 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft | 3 CCT 20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K | 4 RATED DRY IP20 WET IP67 Can be suitable for exterior use, contact factory for more information | 5 EFFICIENCY STD Standard | 6 LENS DF Diffused PR Polar FR Frosted CL Clear For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages |
| 7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed For continuous mounting, consider bottom feed When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details. | 8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48) | 9 CONNECTOR/WIRE OUT CLS Closed End (No feed) | 10 WIRE COLOR WH White BK Black N/A For Barrel wet barrel only available in black | | |
| 11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW) | 12 MOUNTING HSS Hidden Stainless Steel Clip TBC-01 9/16" Flat or Regular TB-Grid TBC-02 15/16" Flat or Regular TB-Grid | 13 FINISH ST Satin BK Black CU Custom Custom finishes require a longer lead time, consult factory | 14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12". | 15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts. | |


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



ESSENTIALS TALO-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface

1 PRODUCT - DIMENSIONS

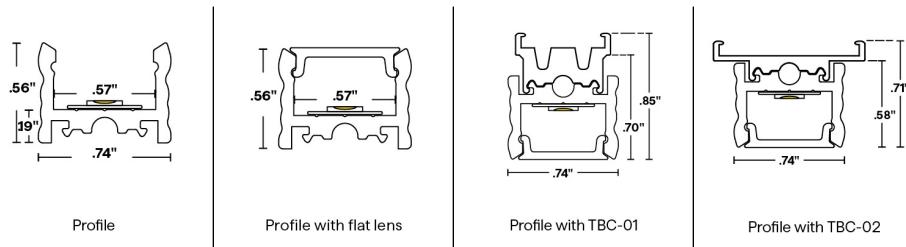

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with TO1SV-**-30-DRY-STD

| | 1.5 W/FT | | 3.0 W/FT | | 4.0 W/FT | | 5.0 W/FT | |
|----|----------|-----|----------|-----|----------|-----|----------|-----|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI |
| CL | 144 | 98 | 251 | 98 | 312 | 98 | 380 | 98 |
| FR | 142 | 98 | 248 | 98 | 308 | 98 | 375 | 98 |
| PR | 133 | 98 | 232 | 98 | 289 | 98 | 351 | 98 |
| DF | 120 | 98 | 210 | 98 | 261 | 98 | 318 | 98 |

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

CL



Clear 80°

TEMPERATURE RATINGS

| | | 1.5 W/FT | | 3.0 W/FT | | 4.0 W/FT | | 5.0 W/FT | |
|-----|----------------------------------|----------|-------|----------|-------|----------|-------|----------|-------|
| | | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 130°F | -4°F | 125°F | -4°F | 120°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 135°F | -4°F | 125°F | -4°F | 120°F | -4°F | 115°F |
| WET | Ambient Operating Temp - Surface | -4°F | 135°F | -4°F | 125°F | -4°F | 120°F | -4°F | 115°F |




ESSENTIALS TALO-FLAT (01) STATIC WHITE


24VDC Linear Fixtures - Surface

7 WIRE INPUT/OUTPUT






SINGLE (Input only)

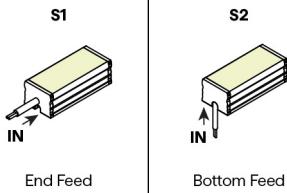

PASS THROUGH (Input/Output)

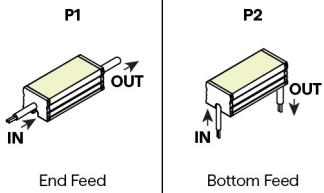


CONFIGURATION OPTIONS

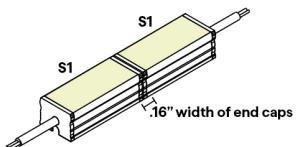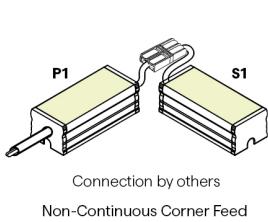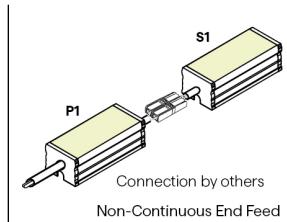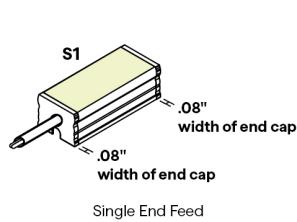

Continuous End to End Feed

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

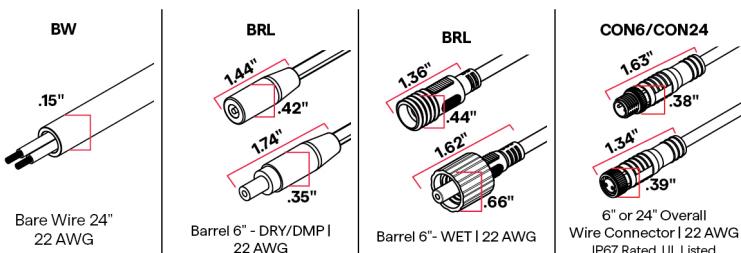

10 WIRE COLOR






ESSENTIALS TALO-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface

12 MOUNTING

| HSS | TBC-01 | TBC-02 |
|--|--|--|
| | | |
| Hidden Stainless Steel Clip | Plastic T-Bar Clip | Plastic T-Bar Clip |
| 2 clips provided for 4' or less. 4 clips provided for greater than 4'. | Use on 9/16" Flat or Tegular Drop Ceiling | Use on 15/16" Flat or Tegular Drop Ceiling |
| To order separately use SST-02 | 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length | 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length |
| Each clip comes with a #4 x 5/8" Flat Head SS | To order separately use TBC-01 | To order separately use TBC-02 |
| | Each pair of clips comes with M2.5 x 4mm set screw and Allen key | Each pair of clips comes with M2.5 x 4mm set screw and Allen key |

13 FINISH




Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

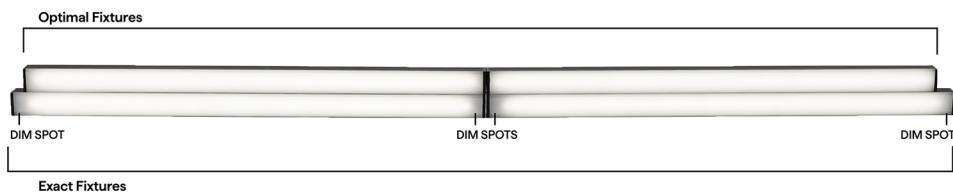

SW DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".



ESSENTIALS TALO-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface

EXACT LENGTH

| Requested Length | Potential dim spot on either end of fixture |
|------------------|---|
| 12" | .5" |
| 13" | .5" |
| 14" | .5" |
| 15" | .5" |
| 16" | .5" |
| 17" | .5" |
| 18" | .5" |
| 19" | .5" |
| 20" | .5" |
| 21" | .5" |
| 22" | .5" |
| 23" | .5" |
| 24" | .5" |
| 36" | .5" |
| 48" | .5" |
| 60" | .5" |
| 72" | .5" |
| 84" | .5" |
| 96" | .5" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2 | | P1 & P2 | |
|--------------------------|----------------|-------------------|----------------|-------------------|
| | S1 End Feed | S2 Bottom Feed | P1 End Feed | P2 Bottom Feed |
| 12" | 11.41" | | 11.66" | |
| 13" | 12.41" | | 12.66" | |
| 14" | 13.41" | | 13.66" | |
| 15" | 14.41" | | 14.66" | |
| 16" | 15.41" | | 15.66" | |
| 17" | 16.41" | | 16.66" | |
| 18" | 17.41" | | 17.66" | |
| 19" | 18.41" | | 18.66" | |
| 20" | 19.41" | | 19.66" | |
| 21" | 20.41" | | 20.66" | |
| 22" | 21.41" | | 21.66" | |
| 23" | 22.41" | | 22.66" | |
| 24" | 23.41" | | 23.66" | |
| 36" | 35.41" | | 35.66" | |
| 48" | 47.41" | | 47.66" | |
| 60" | 59.41" | | 59.66" | |
| 72" | 71.41" | | 71.66" | |
| 84" | 83.41" | | 83.66" | |
| 96" | 95.41" | | 95.66" | |

SW WET LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

| Requested Length | Potential dim spot on either end of fixture |
|------------------|---|
| 12" | .5" |
| 13" | .5" |
| 14" | .5" |
| 15" | .5" |
| 16" | .5" |
| 17" | .5" |
| 18" | .5" |
| 19" | .5" |
| 20" | .5" |
| 21" | .5" |
| 22" | .5" |
| 23" | .5" |
| 24" | .5" |
| 36" | .5" |
| 48" | .5" |
| 60" | .5" |
| 72" | .5" |
| 84" | .5" |
| 96" | .5" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2 | | P1 & P2 | |
|--------------------------|----------------|-------------------|----------------|-------------------|
| | S1 End Feed | S2 Bottom Feed | P1 End Feed | P2 Bottom Feed |
| 12" | 11.56" | | 11.71" | |
| 13" | 12.56" | | 12.71" | |
| 14" | 13.56" | | 13.71" | |
| 15" | 14.56" | | 14.71" | |
| 16" | 15.56" | | 15.71" | |
| 17" | 16.56" | | 16.71" | |
| 18" | 17.56" | | 17.71" | |
| 19" | 18.56" | | 18.71" | |
| 20" | 19.56" | | 19.71" | |
| 21" | 20.56" | | 20.71" | |
| 22" | 21.56" | | 21.71" | |
| 23" | 22.56" | | 22.71" | |
| 24" | 23.56" | | 23.71" | |
| 36" | 35.56" | | 35.71" | |
| 48" | 47.56" | | 47.71" | |
| 60" | 59.56" | | 59.71" | |
| 72" | 71.56" | | 71.71" | |
| 84" | 83.56" | | 83.71" | |
| 96" | 95.56" | | 95.71" | |



ESSENTIALS TALO-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | | OUTDOOR | |
|--------------|--|--|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Dim to Black | Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1 | Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1 | QOM-DC+CAP QOM-PH | QOM-DC+CAP QOM-PH |
| 0.1% | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V | Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V |
| 1% | QTM-eLED(E) QZ-DALI-DT6 | QTM-eLED(E) QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | Q-HEX-mini-DC Q-SET-mLED | |



ESSENTIALS TALO-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface

| DIMMING PROTOCOL | INDOOR | | OUTDOOR | |
|------------------|--|--|---|--|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Non-Dim | QT-CAB-eLED-ND QTM-eLED-ND QZ-ND | QT-CAB-eLED-ND QTM-eLED-ND QZ-ND | Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65 | Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65 |
| Phase | Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1 | Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1 | Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V | Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V |
| 0-10V | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V | Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V |
| Lutron Athena | QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN | QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN | | |
| ECO System | QTM-eLED(E) | QTM-eLED(E) | | |
| DMX | QZ-DMX | QZ-DMX | Q-SET-QZ-DMX QZ-DMX | Q-SET-QZ-DMX QZ-DMX |
| DALI-2: DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6 |
| SCENE App Dimmed | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | | |

COMPATIBLE MOUNTING ACCESSORIES

| | | | | |
|--------------------------------------|-------------------------------------|--------------------------------------|--------------------------|-------------------------------|
| HINGE - HMB-M | HINGE - HMB-L | HINGE - HMB-XL | Q-PIVOT | Q-ANGLE |
| .141" .71" | 1.46" 1.29" | 1.46" 4" | .75" 1.03" | 2.23" 1.38" |
| Adjustable mounting bracket - Medium | Adjustable mounting bracket - Large | Adjustable mounting bracket - XLarge | Small mounting accessory | Adjustable mounting accessory |