




ESSENTIALS TELA-FLAT (01)

RGBW

24VDC Linear Fixtures - Corner & Surface

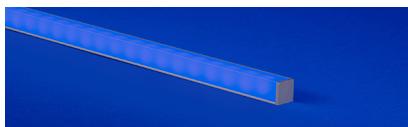

- Corner and surface mount linear fixture
- Choose from diffused or frosted lens options for varying diode visibility and beam angles
- Two-sided 90° lens
- Mounting options include stainless steel or plastic clips
- Features painted end caps to match extrusion finish
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Red, Green, and Blue LED paired with a specifiable white LED allow for color changing applications

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: **TL1RGBW-6.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E**


1 PRODUCT TL1RGBW See following pages for compatible power supplies.	2 WATTS/FT 6.0 6.0W/ft 4.0HE 4.0W/ft HE	3 CCT 27 RGBW-2700K 30 RGBW-3000K 27 RGBW-2700K 30 RGBW-3000K 35 RGBW-3500K 40 RGBW-4000K	4 RATED DRY IP20 DMP IP54 DRY IP20 DMP IP54 WET IP67 Can be suitable for exterior use, contact factory for more information	5 EFFICIENCY STD Standard WFO White Optics WhiteOptics - Internal coating, greater lumen output	6 LENS DF Diffused FR Frosted For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed P1 Pass Through 1 (Input/output) - End Feed	8 CONNECTOR/WIRE IN BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24" BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24"	10 WIRE COLOR WH BK White Black		
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING SST PL Stainless Steel Plastic Clip	13 FINISH ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O E Optimal Illumination Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



ESSENTIALS TELA-FLAT (01) RGBW

24VDC Linear Fixtures - Corner & Surface

1 PRODUCT - DIMENSIONS

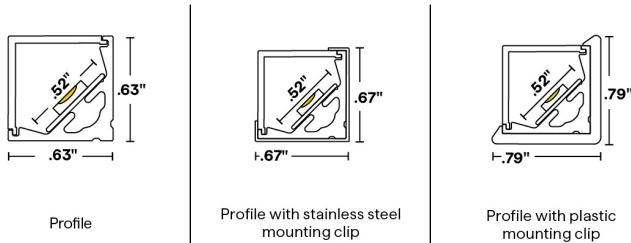

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with TL1RGBW-**-30-DRY-STD

	6.0 W/FT								4.0HE W/FT							
	Red		Green		Blue		3000K		Red		Green		Blue		3000K	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI
FR	38	631	101	513	30	464	129	93	33	629	121	516	27	465	77	97
DF	36	631	97	513	29	464	124	93	31	629	120	516	26	465	74	97

[Calculated L70 = 70000 hrs]
Tested with TL1RGBW-**-30-DRY-WO

	6.0 W/FT								4.0HE W/FT							
	Red		Green		Blue		3000K		Red		Green		Blue		3000K	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI
FR	41	631	111	513	33	464	141	93	36	629	136	516	30	465	85	97
DF	38	631	102	513	31	464	131	93	33	629	127	516	27	465	78	97

6 DIODE VISIBILITY




DF - Diffused lens

FR - Frosted lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



Clear 130°



ESSENTIALS TELA-FLAT (01) RGBW


24VDC Linear Fixtures - Corner & Surface

TEMPERATURE RATINGS

		6.0 W/FT		4.0 HE W/FT	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	110°F	-4°F	120°F
WET	Ambient Operating Temp - Surface	**	**	-4°F	120°F


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output)




End Feed


CONFIGURATION OPTIONS




Single End Feed



Connection by others
Non-Continuous End Feed




Connection by others
Non-Continuous Corner Feed



Continuous End to End Feed

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

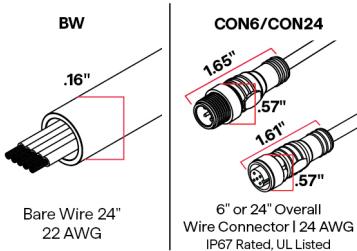

White


Black




ESSENTIALS TELA-FLAT (01) RGBW

24VDC Linear Fixtures - Corner & Surface

12 MOUNTING

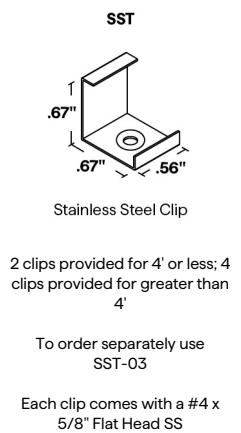

13 FINISH




Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

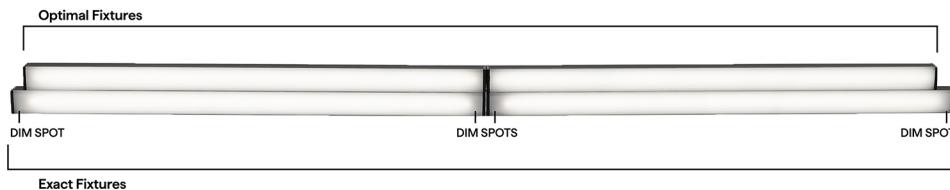

RGBW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture S1 End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 S1 End Feed	P1 P1 OUT IN End Feed
12"	11.49"	11.14"
13"	12.49"	12.14"
14"	13.49"	13.14"
15"	14.49"	14.14"
16"	15.49"	15.14"
17"	16.49"	16.14"
18"	17.49"	17.14"
19"	18.49"	18.14"
20"	19.49"	19.14"
21"	20.49"	20.14"
22"	21.49"	21.14"
23"	22.49"	22.14"
24"	23.49"	23.14"
36"	35.49"	35.14"
48"	47.49"	47.14"
60"	59.49"	59.14"
72"	71.49"	71.14"
84"	83.49"	83.14"
96"	95.49"	95.14"



ESSENTIALS TELA-FLAT (01) RGBW


24VDC Linear Fixtures - Corner & Surface

RGBW-HE WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH


Requested Nominal Length	S1	P1
		
12"	11.34"	10.94"
13"	12.34"	11.94"
14"	13.34"	12.94"
15"	14.34"	13.94"
16"	15.34"	14.94"
17"	16.34"	15.94"
18"	17.34"	16.94"
19"	18.34"	17.94"
20"	19.34"	18.94"
21"	20.34"	19.94"
22"	21.34"	20.94"
23"	22.34"	21.94"
24"	23.34"	22.94"
36"	35.34"	34.94"
48"	47.34"	46.94"
60"	59.34"	58.94"
72"	71.34"	70.94"
84"	83.34"	82.94"
96"	95.34"	94.94"

RGBW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	2"
13"	0.5"
14"	1"
15"	1.5"
16"	2"
17"	0.5"
18"	1"
19"	1.5"
20"	2"
21"	0.5"
22"	1"
23"	1.5"
24"	2"
36"	2"
48"	2"
60"	2"
72"	2"
84"	2"
96"	2"

OPTIMAL LENGTH

Requested Nominal Length	S1	P1
		
12"	11.49"	11.14"
13"	12.49"	12.14"
14"	13.49"	13.14"
15"	14.49"	14.14"
16"	15.49"	15.14"
17"	16.49"	16.14"
18"	17.49"	17.14"
19"	18.49"	18.14"
20"	19.49"	19.14"
21"	20.49"	20.14"
22"	21.49"	21.14"
23"	22.49"	22.14"
24"	23.49"	23.14"
36"	35.49"	35.14"
48"	47.49"	47.14"
60"	59.49"	59.14"
72"	71.49"	71.14"
84"	83.49"	83.14"
96"	95.49"	95.14"



ESSENTIALS TELA-FLAT (01) RGBW

24VDC Linear Fixtures - Corner & Surface

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGBW, RGBW-HE	RGBW, RGBW-HE
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGBW App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGBW, RGBW-HE	RGBW, RGBW-HE
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGBW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES


1.41" .71"	1.46" 1.29"	1.46" 4"	.75" 1.03"	2.23" 1.38"	QUOVA Knife Edge	Double sided mounting tape	J Mounting Bracket	L Mounting Bracket	J Mounting Bracket
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	QUOVA Knife Edge	Double sided mounting tape	J Mounting Bracket	L Mounting Bracket	J Mounting Bracket

SD-L-MEDIUM



L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)



ESSENTIALS TELA-FLAT (01) RGBW

24VDC Linear Fixtures - Corner & Surface

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE	iQ-DMX-STICK-GA2	iQ-DMX-STICK-DE3
 1.36" 2.58" Wi-Fi or Bluetooth Connectivity	 DMX controller for changing color & dimming	 DMX controller for changing color & dimming

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage