



ESSENTIALS TELA-FLAT (01) SW-IA

24VDC Linear Fixtures - Corner & Surface

white optics




RoHS
COMPLIANT

5 YEAR
WARRANTY

Declare

Red List
Approved



- Corner and surface mount linear fixture
- Choose from diffused or frosted lens options
- Two-sided 90° lens
- Mounting options include stainless steel or plastic clips
- Features painted end caps to match extrusion finish
- Utilize DMX and SPI protocols to control nominal 1" segments of specifiable white LEDs

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
TL1A	5.0		DRY											

Sample Part Number: TL1A-5.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E

1 PRODUCT TL1A See following pages for compatible power supplies.	2 WATTS/FT 5.0 5.0W/ft	3 CCT 27 2700K 30 3000K 35 3500K 40 4000K	4 RATED DRY IP20	5 EFFICIENCY STD Standard WFO White Optics WhiteOptics - Internal coating, greater lumen output	6 LENS DF Diffused FR Frosted For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR WH White BK Black		
P1 Pass Through 1 (Input/output) - End Feed	BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel PL Plastic Clip	13 FINISH ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



ESSENTIALS TELA-FLAT (01) SW-IA

24VDC Linear Fixtures - Corner & Surface

1 PRODUCT - DIMENSIONS

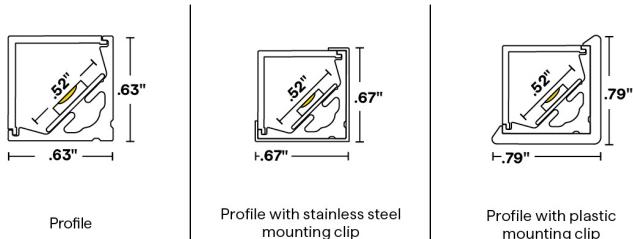

Profile

Profile with stainless steel mounting clip

Profile with plastic mounting clip

6 DIODE VISIBILITY




DF - Diffused lens

FR - Frosted lens

PHOTOMETRIC PERFORMANCE


Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

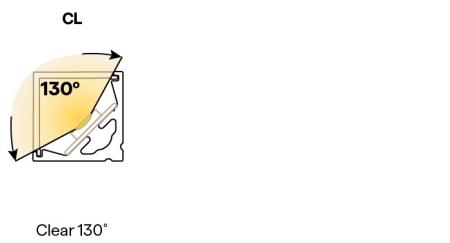

Clear 130°


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output)




End Feed


CONFIGURATION OPTIONS




Single End Feed



Connection by others
Non-Continuous End Feed



Connection by others
Non-Continuous Corner Feed



Continuous End to End Feed




ESSENTIALS TELA-FLAT (01) SW-IA

24VDC Linear Fixtures - Corner & Surface

8 / 9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

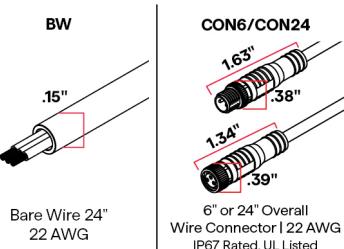

10 WIRE COLOR



12 MOUNTING

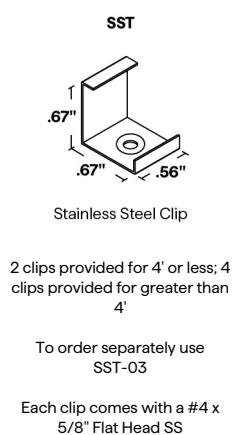


SST

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use
SST-03

Each clip comes with a #4 x 5/8" Flat Head SS




PL

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use
PLC-02

Each clip comes with a #4 x 5/8" Flat Head SS

13 FINISH



Satin

Black


Bronze

Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

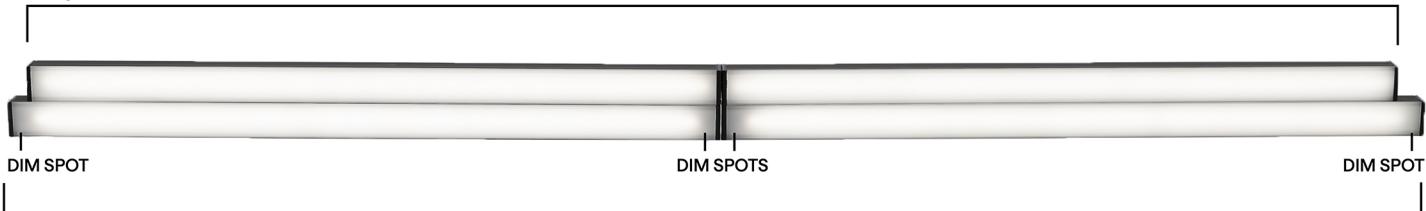

Exact Fixtures



ESSENTIALS TELA-FLAT (01) SW-IA

24VDC Linear Fixtures - Corner & Surface

SW-IA DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $\pm 0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.975"
13"	1.475"
14"	.3"-1.975"
15"	.8"
16"	1.3"
17"	1.8"
18"	.625"
19"	1.125"
20"	1.625"
21"	.45"
22"	.95"
23"	1.45"
24"	1.95"
36"	1.25"
48"	0.55"
60"	1.525"
72"	0.825"
84"	1.8"
96"	1.1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	P1
12"	 End Feed	 End Feed
12"	10.46"	10.71"
13"	10.46"	10.71"
14"	13.81"	10.71"
15"	13.81"	14.06"
16"	13.81"	14.06"
17"	13.81"	14.06"
18"	17.16"	17.41"
19"	17.16"	17.41"
20"	17.16"	17.41"
21"	20.51"	20.76"
22"	20.51"	20.76"
23"	20.51"	20.76"
24"	23.86"	20.76"
36"	33.91"	34.16"
48"	47.31"	47.56"
60"	57.36"	57.61"
72"	70.76"	71.01"
84"	80.81"	81.06"
96"	94.21"	94.46"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has $\pm 5\%$ tolerance.

DIM TO LEVEL	INDOOR
	SW-IA
1%	QT-CAB-eLED+IA QTM-eLED+IA

DIMMING PROTOCOL	INDOOR
	SW-IA
DMX	QT-CAB-eLED+IA QTM-eLED+IA



ESSENTIALS TELA-FLAT (01) SW-IA

24VDC Linear Fixtures - Corner & Surface

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE	QUOVA-STANDARD	VHB	SD-J-LARGE	NL-LARGE	NJ-MEDIUM
1.41" 1.41" .71"	1.46" 1.46" 1.29"	1.46" 1.46" 4"	.75" 1.03"	1.38" 2.23"	QUOVA Knife Edge	Double sided mounting tape	J Mounting Bracket	L Mounting Bracket	J Mounting Bracket

SD-L-MEDIUM



L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J	Q-mini-J5	BARREL-EXT	BARREL FOUR-FER	CON120-EXT	CON FOUR-FER	CON M - BARREL F
1.25" 2"	2.27" 2.80"	8ft barrel cable extender DRY ONLY	Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	10ft Con cable extender DRY/DMP/WET	Splits lead from one to four LED Con connectors DRY/DMP/WET	Male con to barrel cable adaptor DRY/DMP