




# ESSENTIALS THIN-FLAT (01)

## WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



- Thin, low-profile surface mount linear fixture
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/OPTIMAL
				STD										

Sample Part Number: TH1WD-6.0-19/30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E


<b>1</b> <b>PRODUCT</b>  <b>TH1WD</b>  LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  <b>6.0</b> 6.0W/ft  <b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE  <b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE	<b>3</b> <b>CCT</b>  <b>19/27</b> 1900K/2700K <b>19/30</b> 1900K/3000K  <b>20/27</b> 2000K/2700K <b>20/30</b> 2000K/3000K <b>27/40</b> 2700K/4000K <b>27/55</b> 2700K/5500K  <b>24/30</b> 2400K/3000K <b>27/40</b> 2700K/4000K	<b>4</b> <b>RATED</b>  <b>DRY</b> IP20 <b>WET</b> IP67  Can be suitable for exterior use, contact factory for more information. WET rated strips are only compatible without a lens	<b>5</b> <b>EFFICIENCY</b>  <b>STD</b> Standard	<b>6</b> <b>LENS</b>  <b>DF</b> Diffused <b>PR</b> Polar <b>FR</b> Frosted <b>CL</b> Clear <b>N/A</b> For wet rated LED Strips  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. WET rated strips are only compatible without a lens
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  <b>S1</b> Single 1 (Input only) - End Feed <b>S2</b> Single 2 (Input only) - Bottom Feed  <b>P1</b> Pass Through 1 (Input/output) - End Feed <b>P2</b> Pass Through 2 (Input/output) - Bottom Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  <b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  <b>CLS</b> Closed End (No feed)	<b>10</b> <b>WIRE COLOR</b>  <b>WH</b> White <b>BK</b> Black <b>N/A</b> For Barrel wet barrel only available in black		
For continuous mounting, consider bottom feed.	BRL only available with TH1WD BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BRL only available with TH1WD BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
<b>11</b> <b>WIRE TYPE</b>  <b>CL2</b> Class 2 <b>N/A</b> For Barrel	<b>12</b> <b>MOUNTING</b>  <b>SST</b> Stainless Steel <b>M4</b> Low Profile Magnet <b>MG</b> Magnet	<b>13</b> <b>FINISH</b>  <b>ST</b> Satin <b>BK</b> Black <b>CU</b> Custom Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  <b>O</b> Optimal Illumination <b>E</b> Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



# ESSENTIALS THIN-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

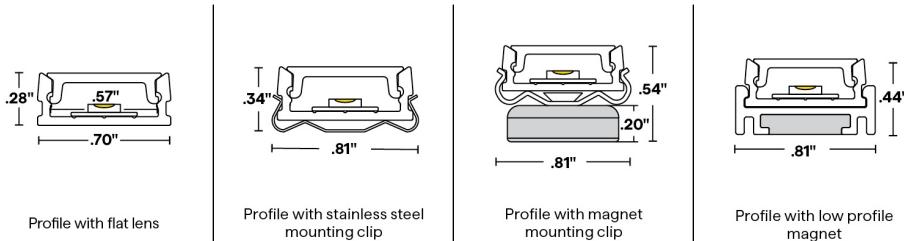

## 2 DELIVERED LUMENS


[Calculated L70 = 70000 hrs]  
Tested with TH1WD-6.0-30-DRY-STD

	3000K	
	LM/FT	CRI
CL	441	97
FR	426	97
PR	399	97
DF	366	97

[Calculated L70 = 70000 hrs]  
Tested with TH1DW-\*\*-30-DRY-STD

	1.5HE W/FT		2.5HE W/FT	
	3000K		3000K	
	LM/FT	CRI	LM/FT	CRI
CL	165	98	263	98
FR	163	98	256	98
PR	156	98	243	98
DF	141	98	222	98

## 6 DIODE VISIBILITY

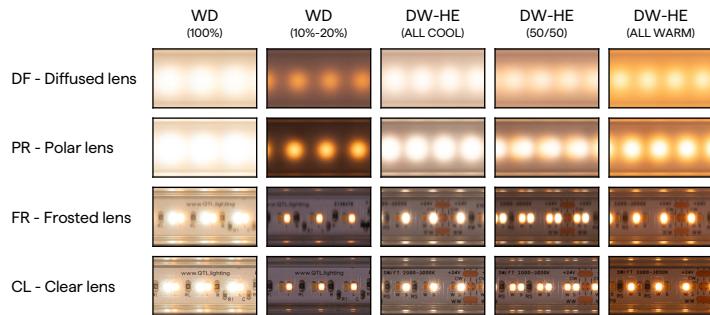

## TEMPERATURE RATINGS

		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
		WD 6.0 W/FT		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX	
		Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	110°F	-4°F	145°F	-4°F	130°F	-4°F	130°F
DMP	Ambient Operating Temp - Surface	**	**	-4°F	140°F	-4°F	125°F	-4°F	125°F
WET	Ambient Operating Temp - Surface	-4°F	105°F	-4°F	140°F	-4°F	125°F	-4°F	125°F




# ESSENTIALS THIN-FLAT (01) WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output)




## CONFIGURATION OPTIONS




Single End Feed




Non-Continuous End Feed



Non-Continuous Corner Feed




Continuous Bottom Feed




Continuous End to End Feed

## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



Bare Wire 24"  
22 AWG

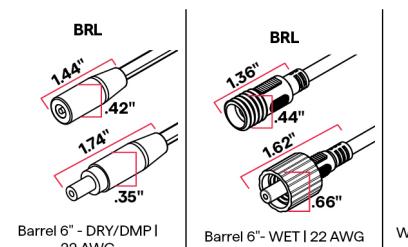

Barrel 6" - DRY/DMP |  
22 AWG



## 10 WIRE COLOR



White

Black



## ESSENTIALS THIN-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

### 12 MOUNTING

SST	M4	MMA-04	MG
Satin Stainless Steel Clip	Low Profile Magnet	Magnet Mount Accessory for M4	Magnet Clip
2 clips provided for 4' or less; 4 clips provided for greater than 4' To order separately use SST-01 Each clip comes with a #4 x 5/8" Flat Head SS	One M4 provided per foot. To order separately use MG-04	Sold separately, to order use MMA-04 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface	One MG provided per foot To order separately use MG-01

### 13 FINISH



Satin

Black

Custom finishes require a longer lead time, consult factory

### MMA-01


Magnet Mount Accessory of MG-01
Sold separately, to order use MMA-01
Each bracket comes with 2 #6 x 5/8" Flat Head SS
Required when mounting to a non-magnetic surface

### 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

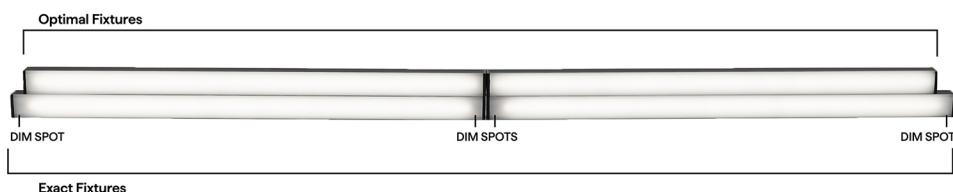



# ESSENTIALS THIN-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## WD DRY LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.41"		10.66"	
13"	12.41"		12.66"	
14"	12.41"		12.66"	
15"	14.41"		14.66"	
16"	14.41"		14.66"	
17"	16.41"		16.66"	
18"	16.41"		16.66"	
19"	18.41"		18.66"	
20"	18.41"		18.66"	
21"	20.41"		20.66"	
22"	20.41"		20.66"	
23"	22.41"		22.66"	
24"	22.41"		22.66"	
36"	34.41"		34.66"	
48"	46.41"		46.66"	
60"	58.41"		58.66"	
72"	70.41"		70.66"	
84"	82.41"		82.66"	
96"	94.41"		94.66"	

## WD WET LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.61"		10.76"	
13"	12.61"		12.76"	
14"	12.61"		12.76"	
15"	14.61"		14.76"	
16"	14.61"		14.76"	
17"	16.61"		16.76"	
18"	16.61"		16.76"	
19"	18.61"		18.76"	
20"	18.61"		18.76"	
21"	20.61"		20.76"	
22"	20.61"		20.76"	
23"	22.61"		22.76"	
24"	22.61"		22.76"	
36"	34.61"		34.76"	
48"	46.61"		46.76"	
60"	58.61"		58.76"	
72"	70.61"		70.76"	
84"	82.61"		82.76"	
96"	94.61"		94.76"	



# ESSENTIALS THIN-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## DW-HE DRY DMP LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	

## DW-HE WET LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.66"		11.06"	
13"	12.66"		11.06"	
14"	12.66"		13.06"	
15"	14.66"		13.06"	
16"	14.66"		15.06"	
17"	16.66"		15.06"	
18"	16.66"		17.06"	
19"	18.66"		17.06"	
20"	18.66"		19.06"	
21"	20.66"		19.06"	
22"	20.66"		21.06"	
23"	22.66"		21.06"	
24"	22.66"		23.06"	
36"	34.66"		35.06"	
48"	46.66"		47.06"	
60"	58.66"		59.06"	
72"	70.66"		71.06"	
84"	82.66"		83.06"	
96"	94.66"		95.06"	



# ESSENTIALS THIN-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QZ-DW	Q-SET-QZ-PH/0-10V QZ-PH/0-10V
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN		
ECO System		QTM-eLED(E)		
DMX	If using DW LED, wattage must be doubled	QZ-DMX		QZ-DMX
DALI-2: DT6	If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
DALI-2: DT8	If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		



# ESSENTIALS THIN-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-S	HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE	QUOVA-STANDARD	NJ-MEDIUM	SD-L-MEDIUM	MMA-01
1.41" .51"	1.41" .71"	1.46" 1.29"	1.46" 4"	75" 1.03"	2.23" 1.38"	QUOVA Knife Edge			.23" .75"

MMA-04



Magnet Mount Accessory  
of MG-04