




# ESSENTIALS THIN-FLAT (01)

## STATIC WHITE SCOB

24VDC Linear Fixtures - Surface & Recessed



410.2 & 410.16  
Closet Rated  
up to 4.0/W/ft



- Thin, low-profile surface mount linear fixture
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
THISW-SCOB			DRY	STD										

Sample Part Number: **TH1SW-SCOB-5.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48-E**


<b>1</b> <b>PRODUCT</b> THISW-SCOB See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b> 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft	<b>3</b> <b>CCT</b> 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	<b>4</b> <b>RATED</b> DRY IP20 Can be suitable for exterior use, contact factory for more information WET rated strips are only compatible without a lens	<b>5</b> <b>EFFICIENCY</b> STD Standard	<b>6</b> <b>LENS</b> DF Diffused PR Polar FR Frosted CL Clear For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.
<b>7</b> <b>WIRE INPUT/OUTPUT</b> S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b> BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b> CLS Closed End (No feed)	<b>10</b> <b>WIRE COLOR</b> WH White BK Black N/A For Barrel wet barrel only available in black		
P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed	BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"			
		BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
<b>11</b> <b>WIRE TYPE</b> CL2 Class 2 N/A For Barrel	<b>12</b> <b>MOUNTING</b> SST Stainless Steel M4 Low Profile Magnet MG Magnet	<b>13</b> <b>FINISH</b> ST Satin BK Black CU Custom Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b> Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b> O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



# ESSENTIALS THIN-FLAT (01) STATIC WHITE SCOB

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

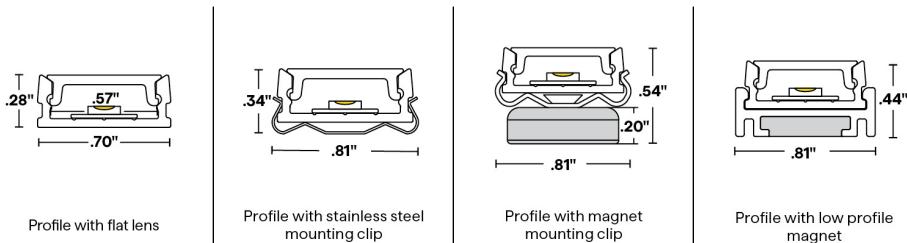

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with TH1SW-\*\*-30-DRY-STD


	1.5 W/FT	3.0 W/FT	4.0 W/FT	5.0 W/FT				
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	152	98	276	98	330	98	407	98
FR	149	98	273	98	325	98	400	98
PR	141	98	255	98	304	98	377	98
DF	127	98	231	98	278	98	341	98

## TEMPERATURE RATINGS


		1.5 W/FT		3.0 W/FT		4.0 W/FT		5.0 W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	125°F	-4°F	120°F	-4°F	115°F
DMP	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	-4°F	115°F	-4°F	110°F
WET	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	-4°F	115°F	-4°F	110°F

## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)



PASS THROUGH (Input/Output)







# ESSENTIALS THIN-FLAT (01) STATIC WHITE SCOB

24VDC Linear Fixtures - Surface & Recessed


## CONFIGURATION OPTIONS




Single End Feed




Non-Continuous End Feed



Non-Continuous Corner Feed




Continuous Bottom Feed



Continuous End to End Feed

## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out




Bare Wire 24"  
22 AWG



Barrel 6" - DRY/DMP |  
22 AWG



Barrel 6" - WET | 22 AWG



6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed



White

Black


## 10 WIRE COLOR



# ESSENTIALS THIN-FLAT (01) STATIC WHITE SCOB

24VDC Linear Fixtures - Surface & Recessed

## 12 MOUNTING




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01


Each clip comes with a #4 x 5/8" Flat Head SS



Low Profile Magnet

One M4 provided per foot.

To order separately use MG-04




Magnet Mount Accessory for M4

Sold separately, to order use MMA-04

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface




Magnet Clip

One MG provided per foot

To order separately use MG-01

## 13 FINISH



Satin

Black

Custom finishes require a longer lead time, consult factory

MMA-01



Magnet Mount Accessory of MG-01

Sold separately, to order use MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS


Required when mounting to a non-magnetic surface

## 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

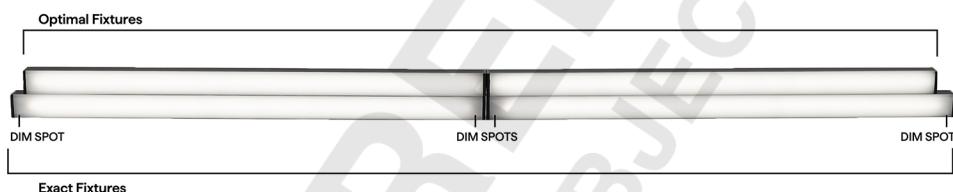



# ESSENTIALS THIN-FLAT (01) STATIC WHITE SCOB

24VDC Linear Fixtures - Surface & Recessed

## SW DRY DMP LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	11.41"		11.66"	
13"	12.41"		12.66"	
14"	13.41"		13.66"	
15"	14.41"		14.66"	
16"	15.41"		15.66"	
17"	16.41"		16.66"	
18"	17.41"		17.66"	
19"	18.41"		18.66"	
20"	19.41"		19.66"	
21"	20.41"		20.66"	
22"	21.41"		21.66"	
23"	22.41"		22.66"	
24"	23.41"		23.66"	
36"	35.41"		35.66"	
48"	47.41"		47.66"	
60"	59.41"		59.66"	
72"	71.41"		71.66"	
84"	83.41"		83.66"	
96"	95.41"		95.66"	

## SW WET LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	11.56"		11.71"	
13"	12.56"		12.71"	
14"	13.56"		13.71"	
15"	14.56"		14.71"	
16"	15.56"		15.71"	
17"	16.56"		16.71"	
18"	17.56"		17.71"	
19"	18.56"		18.71"	
20"	19.56"		19.71"	
21"	20.56"		20.71"	
22"	21.56"		21.71"	
23"	22.56"		22.71"	
24"	23.56"		23.71"	
36"	35.56"		35.71"	
48"	47.56"		47.71"	
60"	59.56"		59.71"	
72"	71.56"		71.71"	
84"	83.56"		83.71"	
96"	95.56"		95.71"	



# ESSENTIALS THIN-FLAT (01) STATIC WHITE SCOB

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	



# ESSENTIALS THIN-FLAT (01) STATIC WHITE SCOB

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-S</b> 1.41" .51"	<b>HINGE - HMB-M</b> 1.41" .71"	<b>HINGE - HMB-L</b> 1.46" 1.29" 1.46"	<b>HINGE - HMB-XL</b> 4" 1.46"	<b>Q-PIVOT</b> .75" 1.03"	<b>Q-ANGLE</b> 1.38" 2.23"	<b>QUOVA-STANDARD</b> 	<b>NJ-MEDIUM</b> 	<b>SD-L-MEDIUM</b> 	<b>MMA-01</b> 1.23" .75"
Adjustable mounting bracket - Small	Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	QUOVA Knife Edge	J Mounting Bracket	L Mounting Bracket	Magnet Mount Accessory of MG-01

**MMA-04**





Magnet Mount Accessory of MG-04  
.19" .93"



# ESSENTIALS THIN-FLAT (01) STATIC WHITE SCOB

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE WIRING ACCESSORIES

 Q-mini-J 2" 1.25"	 Q-mini-J5 2.80" 2.27"	 BARREL-EXT 8ft barrel cable extender DRY ONLY	 BARREL FOUR-FER Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	 CON120-EXT 10ft Con cable extender DRY/DMP/WET	 CON FOUR-FER Splits lead from one to four LED Con connectors DRY/DMP/WET	 CON M - BARREL F Male con to barrel cable adaptor DRY/DMP
---	--	--	---	---	---	---

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



1.36"  
2.58"

Wi-Fi or Bluetooth  
Connectivity

## COMPATIBLE APPS

### NFC APP



Read and write  
DMX addresses and  
adjust voltage