




# ESSENTIALS THIN-FLAT (01) SW-IA

24VDC Linear Fixtures - Surface & Recessed



Declare



- Thin, low-profile surface mount linear fixture
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Utilize DMX and SPI protocols to control nominal 1" segments of specifiable white LEDs

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
TH1IA	5.0		DRY	STD						CL2				

Sample Part Number: TH1IA-5.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E

<b>1</b> <b>PRODUCT</b>  TH1IA  See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  5.0 5.0W/ft	<b>3</b> <b>CCT</b>  27 2700K 30 3000K 35 3500K 40 4000K	<b>4</b> <b>RATED</b>  DRY IP20	<b>5</b> <b>EFFICIENCY</b>  STD Standard	<b>6</b> <b>LENS</b>  DF Diffused PR Polar FR Frosted CL Clear  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. WET rated strips are only compatible without a lens.
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed  For continuous mounting, consider bottom feed.	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black		
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2	<b>12</b> <b>MOUNTING</b>  SST Stainless Steel M4 Low Profile Magnet MG Magnet	<b>13</b> <b>FINISH</b>  ST Satin BK Black CU Custom  Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# ESSENTIALS THIN-FLAT (01) SW-IA

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

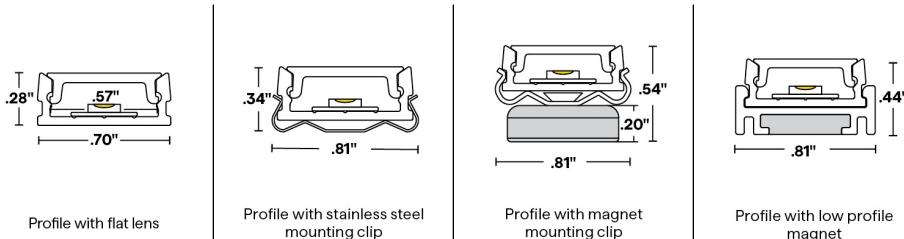


## 6 DIODE VISIBILITY




- DF - Diffused lens
- PR - Polar lens
- FR - Frosted lens
- CL - Clear lens

## 7 WIRE INPUT/OUTPUT






SINGLE (Input only)

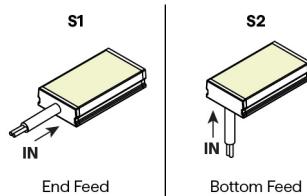

PASS THROUGH (Input/Output)

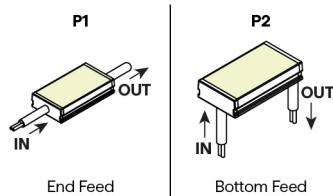

## CONFIGURATION OPTIONS

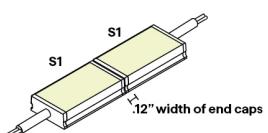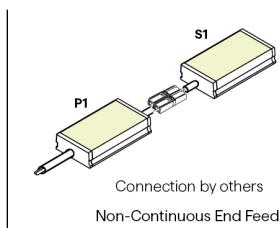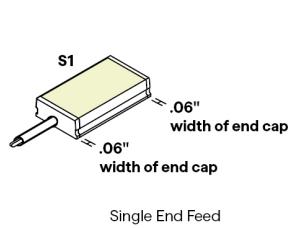

Continuous End to End Feed




# ESSENTIALS THIN-FLAT (01) SW-IA

24VDC Linear Fixtures - Surface & Recessed

## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

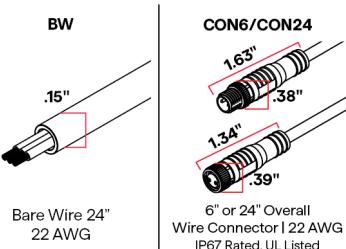

## 10 WIRE COLOR



## 12 MOUNTING

SST	M4	MMA-04	MG
Stainless Steel Clip 1.25" height, .81" width, .20" thickness 2 clips provided for 4' or less; 4 clips provided for greater than 4' To order separately use SST-01 Each clip comes with a #4 x 5/8" Flat Head SS	Low Profile Magnet 2.25" height, .71" width, .28" thickness One M4 provided per foot. To order separately use MG-04	Magnet Mount Accessory for M4 .19" height, .64" width, .93" thickness Sold separately, to order use MMA-04 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface	Magnet Clip 1.25" height, .81" width, .20" thickness One MG provided per foot To order separately use MG-01

### MMA-01

MMA-01 .23" height, .64" width, .75" thickness Magnet Mount Accessory of MG-01 Sold separately, to order use MMA-01 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface
--

## 13 FINISH



Custom finishes require a longer lead time, consult factory




# ESSENTIALS THIN-FLAT (01) SW-IA

24VDC Linear Fixtures - Surface & Recessed

## 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

### Optimal Fixtures

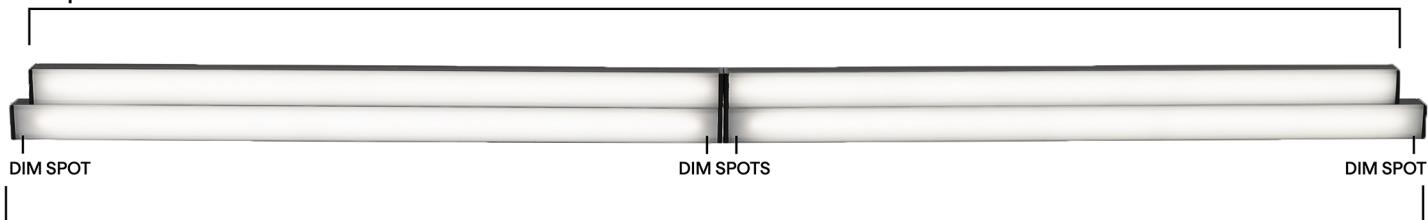

### Exact Fixtures

## SW-IA DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.975"
13"	1.475"
14"	.3"-1.975"
15"	.8"
16"	1.3"
17"	1.8"
18"	.625"
19"	1.125"
20"	1.625"
21"	.45"
22"	.95"
23"	1.45"
24"	1.95"
36"	1.25"
48"	0.55"
60"	1.525"
72"	0.825"
84"	1.8"
96"	1.1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2
12"	10.46"	10.71"
13"	10.46"	10.71"
14"	13.81"	10.71"
15"	13.81"	14.06"
16"	13.81"	14.06"
17"	13.81"	14.06"
18"	17.16"	17.41"
19"	17.16"	17.41"
20"	17.16"	17.41"
21"	20.51"	20.76"
22"	20.51"	20.76"
23"	20.51"	20.76"
24"	23.86"	20.76"
36"	33.91"	34.16"
48"	47.31"	47.56"
60"	57.36"	57.61"
72"	70.76"	71.01"
84"	80.81"	81.06"
96"	94.21"	94.46"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has  $+/- 5\%$  tolerance.

DIM TO LEVEL	INDOOR	
	SW-IA	
1%		QT-CAB-eLED+IA QTM-eLED+IA




# ESSENTIALS THIN-FLAT (01) SW-IA

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	SW-IA
DMX	QT-CAB-eLED+IA QTM-eLED+IA

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-S</b>  1.41" .51"	<b>HINGE - HMB-M</b>  1.41" .71"	<b>HINGE - HMB-L</b>  1.46" 1.29" 1.46"	<b>HINGE - HMB-XL</b>  4" 1.46"	<b>Q-PIVOT</b>  75" 1.03"	<b>Q-ANGLE</b>  2.23" 1.38"	<b>QUOVA-STANDARD</b>  QUOVA Knife Edge	<b>NJ-MEDIUM</b>  J Mounting Bracket	<b>SD-L-MEDIUM</b>  L Mounting Bracket	<b>MMA-01</b>  Magnet Mount Accessory of MG-01
Adjustable mounting bracket - Small	Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	QUOVA Knife Edge	J Mounting Bracket	L Mounting Bracket	Magnet Mount Accessory of MG-01

**MMA-04**



Magnet Mount Accessory of MG-04

## COMPATIBLE WIRING ACCESSORIES

<b>Q-mini-J5</b>  2.80" 2.27"	<b>CON120-EXT</b>  10ft Con cable extender DRY/DMP/WET	<b>CON FOUR-FER</b>  Splits lead from one to four LED Con connectors DRY/DMP/WET
--	---	---

## COMPATIBLE CONTROL ACCESSORIES

<b>SCENE APP DONGLE</b>  1.36" 2.58"
Wi-Fi or Bluetooth Connectivity