




# ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



white optics



NEC  
410.3 and 410.18  
Closet Rated in  
1.5HE

RoHS  
COMPLIANT  
JAB-2019  
HE only



Declare



- Surface mount linear fixture
- Choose from diffused, polar, frosted, clear 60°, or clear 70° lens options for varying diode visibility and beam angles
- Offered with an optional mounting tray
- Features all wire feed options
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Used in applications where CCT and brightness need to be controlled separately
- When using DALI and DMX power supplies, LED wattage must be doubled

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/OPTIMAL
TQ1DW														

Sample Part Number: TQ1DW-2.5HE-20/30-DRY-WO-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E

<b>1</b> <b>PRODUCT</b>  TQ1DW  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE  1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	<b>3</b> <b>CCT</b>  20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K  24/30 2400K/3000K 27/40 2700K/4000K	<b>4</b> <b>RATED</b>  DRY IP20  DMP IP54	<b>5</b> <b>EFFICIENCY</b>  STD Standard WO White Optics  WhiteOptics - Internal coating, greater lumen output	<b>6</b> <b>LENS</b>  DF Diffused PR Polar FR Frosted CL/60 Clear 60° CL/70 Clear 70°  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed  For continuous mounting, consider bottom or side feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black		
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  SST Stainless Steel M4 Low Profile Magnet MG Magnet	<b>13</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze CU Custom	<b>14</b> <b>LENGTH (IN)</b>  Fixture length min 12", max 98.43" not including end caps. Tolerance +0 - 1/8". Consult factory for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

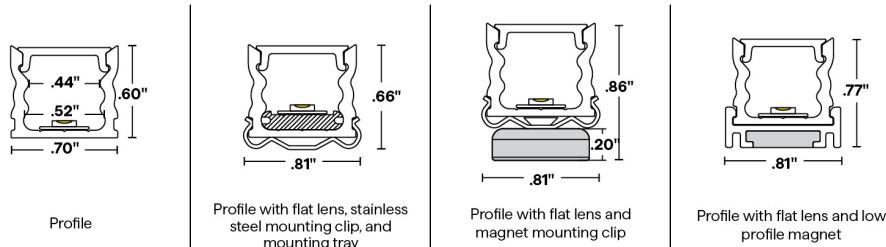

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with TQ1DW-\*\*-30-DRY-STD

	1.5HE W/FT	2.5HE W/FT	4.0HE W/FT			
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
60	125	98	198	98	307	98
70	127	98	200	98	311	98
FR	123	98	194	98	302	98
PR	110	98	174	98	271	98
DF	100	98	157	98	245	98

[Calculated L70 = 70000 hrs]  
Tested with TQ1DW-\*\*-30-DRY-WO

	1.5HE W/FT	2.5HE W/FT	4.0HE W/FT			
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
60	137	98	217	98	338	98
70	143	98	226	98	352	98
FR	135	98	213	98	331	98
PR	122	98	192	98	299	98
DF	108	98	171	98	266	98

## 6 DIODE VISIBILITY



DF - Diffused lens


PR - Polar lens

FR - Frosted lens

CL - Clear lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





# ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## TEMPERATURE RATINGS


		DW 1.5 HE W/FT				DW 2.5 HE W/FT				DW 4.0 HE W/FT			
		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	135°F	-4°F	140°F	-4°F	120°F	-4°F	130°F	-4°F	110°F
DMP	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	135°F	-4°F	115°F	**	**	**	**

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

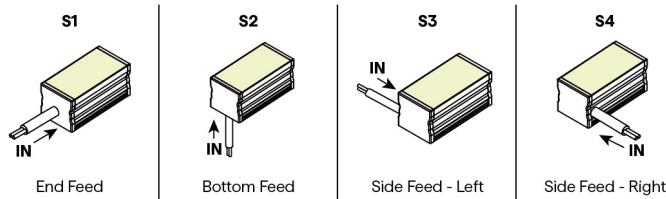

PASS THROUGH (Input/Output)

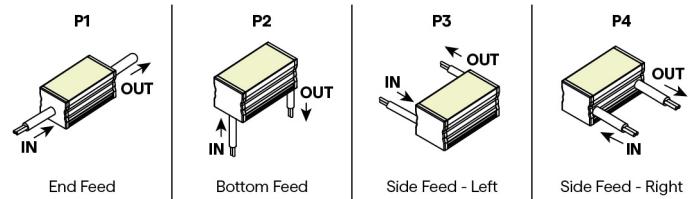


## CONFIGURATION OPTIONS

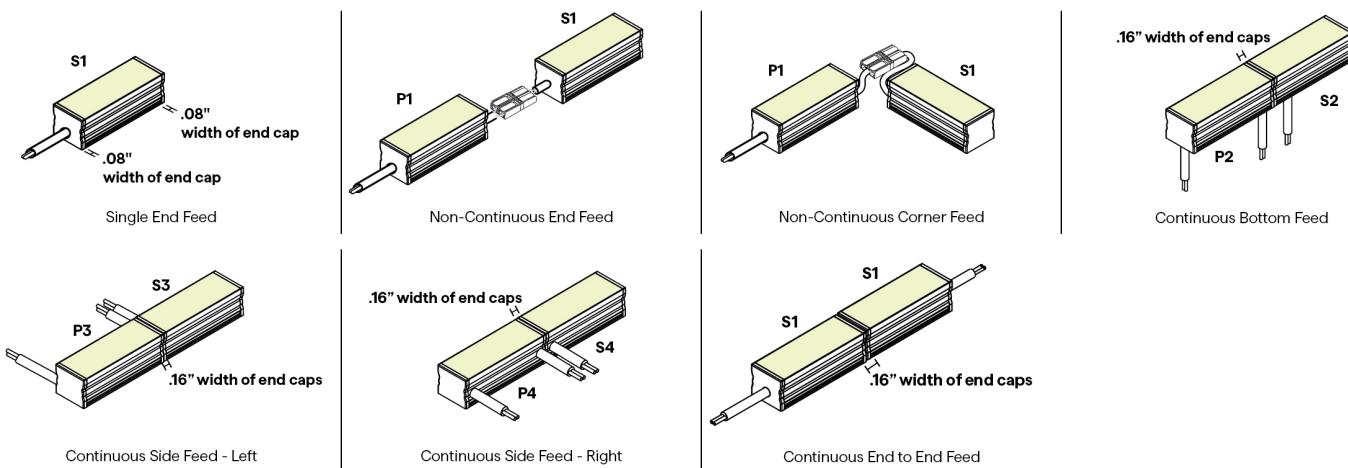

## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



## 10 WIRE COLOR






# ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 12 MOUNTING




Satin Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01


Each clip comes with a #4 x 5/8" Flat Head SS



Low Profile Magnet

One M4 provided per foot.

To order separately use MG-04




Magnet Mount Accessory for M4

Sold separately, to order use MMA-04

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface



Magnet Clip

One MG provided per foot

To order separately use MG-01



Satin  
Black  
Bronze

Custom color available

## MMA-01



Magnet Mount Accessory of MG-01

Sold separately, to order use MMA-01


Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

## 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

### Optimal Fixtures

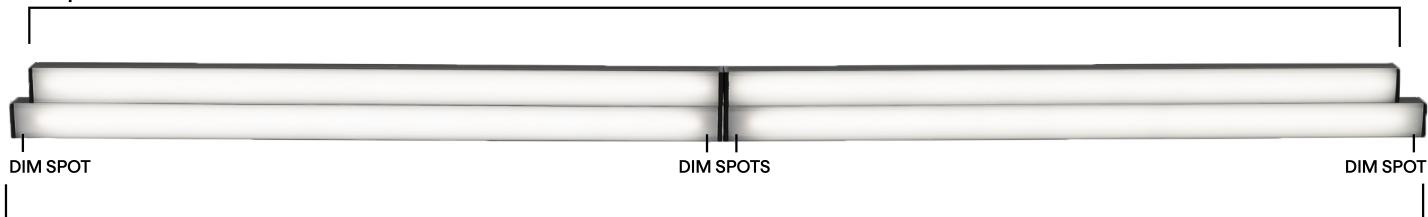

### Exact Fixtures



# ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## DW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.5"		10.75"		10.375"		10.375"	
13"	12.5"		12.75"		12.375"		12.375"	
14"	12.5"		12.75"		12.375"		12.375"	
15"	14.5"		14.75"		14.375"		14.375"	
16"	14.5"		14.75"		14.375"		14.375"	
17"	16.5"		16.75"		16.375"		16.375"	
18"	16.5"		16.75"		16.375"		16.375"	
19"	18.5"		18.75"		18.375"		18.375"	
20"	18.5"		18.75"		18.375"		18.375"	
21"	20.5"		20.75"		20.375"		20.375"	
22"	20.5"		20.75"		20.375"		20.375"	
23"	22.5"		22.75"		22.375"		22.375"	
24"	22.5"		22.75"		22.375"		22.375"	
36"	34.5"		34.75"		34.375"		34.375"	
48"	46.5"		46.75"		46.375"		46.375"	
60"	58.5"		58.75"		58.375"		58.375"	
72"	70.5"		70.75"		70.375"		70.375"	
84"	82.5"		82.75"		82.375"		82.375"	
96"	94.5"		94.75"		94.375"		94.375"	

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has  $+/- 5\%$  tolerance.

DIM TO LEVEL	INDOOR	
	DW-HE Tunable Applications	
0.1%		QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX
1%		QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
10%		Non-Dim Power Supply with TW App Dongle




# ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN
<b>DMX</b> LED wattage must be doubled for DW-HE products	QZ-DMX
<b>DALI-2: DT6</b> LED wattage must be doubled for DW-HE products	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
<b>DALI-2: DT8</b> LED wattage must be doubled for DW-HE products	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
<b>SCENE App Dimmed</b>	Non-Dim Power Supply with TW App Dongle

## COMPATIBLE MOUNTING ACCESSORIES

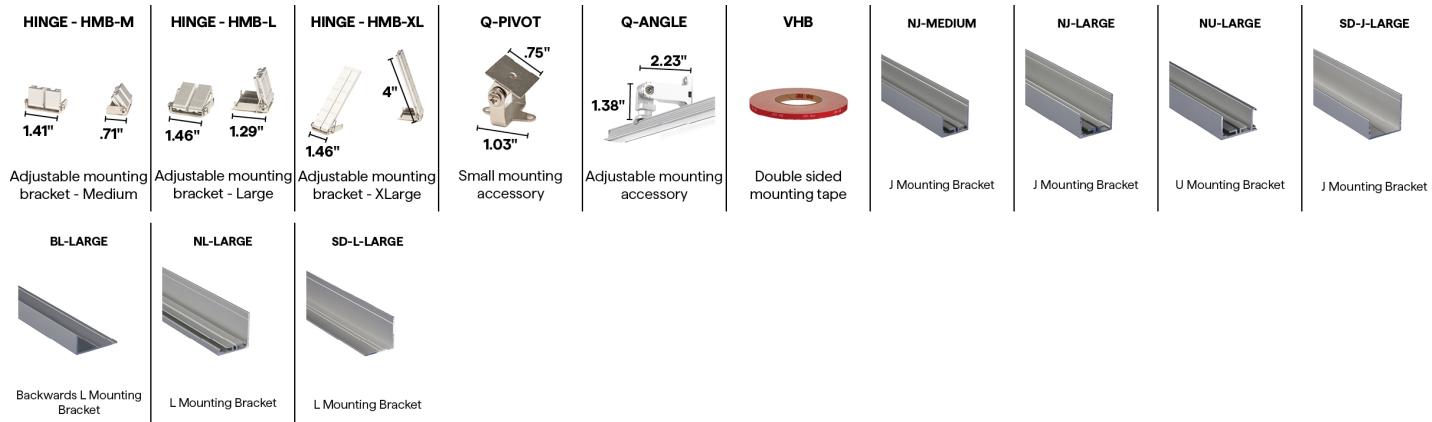

## COMPATIBLE WIRING ACCESSORIES





## ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

### COMPATIBLE CONTROL ACCESSORIES

#### SCENE APP DONGLE



Wi-Fi or Bluetooth  
Connectivity

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage