




ESSENTIALS TORQ-FLAT (01)

WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



- Surface mount linear fixture
- Choose from diffused, polar, frosted, clear 60°, or clear 70° lens options for varying diode visibility and beam angles
- Offered with an optional mounting tray
- Features all wire feed options
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled
- Optional plastic louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/OPTIMAL

Sample Part Number: TQ1WD-6.0-19/30-DRY-WO-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E


1 PRODUCT TQ1WD LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies.	2 WATTS/FT 6.0 6.0W/ft 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	3 CCT 19/27 1900K/2700K 19/30 1900K/3000K 20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K 24/30 2400K/3000K 27/40 2700K/4000K	4 RATED DRY IP20 DRY IP20 DMP IP54	5 EFFICIENCY STD Standard WFO White Optics WhiteOptics - Internal coating, greater lumen output	6 LENS For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR WH White BK Black N/A For Barrel wet barrel only available in black		
For continuous mounting, consider bottom or side feed	BRL only available with TQ1WD BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BRL only available with TQ1WD BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet	13 FINISH ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



ESSENTIALS TORQ-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

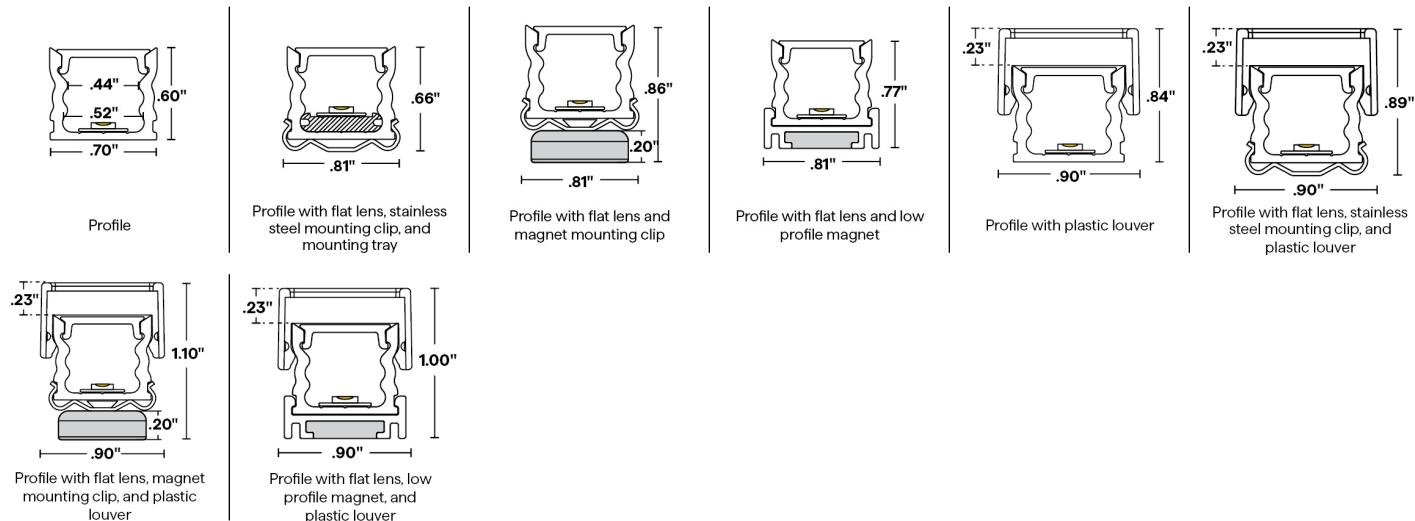

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with TQ1WD-6.0-30-DRY-STD

	3000K	
	LM/FT	CRI
60	394	97
70	417	97
FR	376	97
PR	334	97
DF	281	97

[Calculated L70 = 70000 hrs]
Tested with TQ1WD-6.0-30-DRY-WO

	6.0 W/FT	
	LM/FT	CRI
60	407	97
70	424	97
FR	399	97
PR	361	97
DF	320	97


[Calculated L70 = 70000 hrs]
Tested with TQ1DW-**-30-DRY-STD

	1.5HE W/FT			2.5HE W/FT			4.0HE W/FT		
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT
60	125	98	198	98	307	98			
70	127	98	200	98	311	98			
FR	123	98	194	98	302	98			
PR	110	98	174	98	271	98			
DF	100	98	157	98	245	98			

[Calculated L70 = 70000 hrs]
Tested with TQ1DW-**-30-DRY-WO


	1.5HE W/FT			2.5HE W/FT			4.0HE W/FT		
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT
60	137	98	217	98	338	98			
70	143	98	226	98	352	98			
FR	135	98	213	98	331	98			
PR	122	98	192	98	299	98			
DF	108	98	171	98	266	98			

6 DIODE VISIBILITY



PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





ESSENTIALS TORQ-FLAT (01) WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT			
WD 6.0 W/FT		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply			
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
DRY	Ambient Operating Temp - Surface	-4°F	120°F	-4°F	145°F	-4°F	135°F	-4°F	140°F	-4°F	120°F	-4°F	130°F	-4°F	110°F
DMP	Ambient Operating Temp - Surface	**	**	-4°F	140°F	-4°F	130°F	-4°F	135°F	-4°F	115°F	**	**	**	**

7 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)

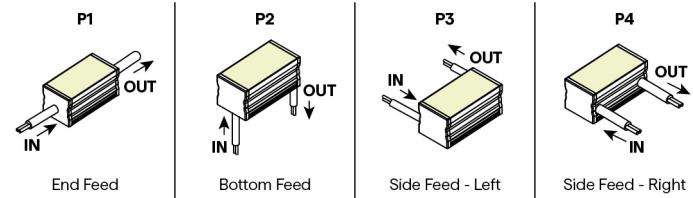


CONFIGURATION OPTIONS

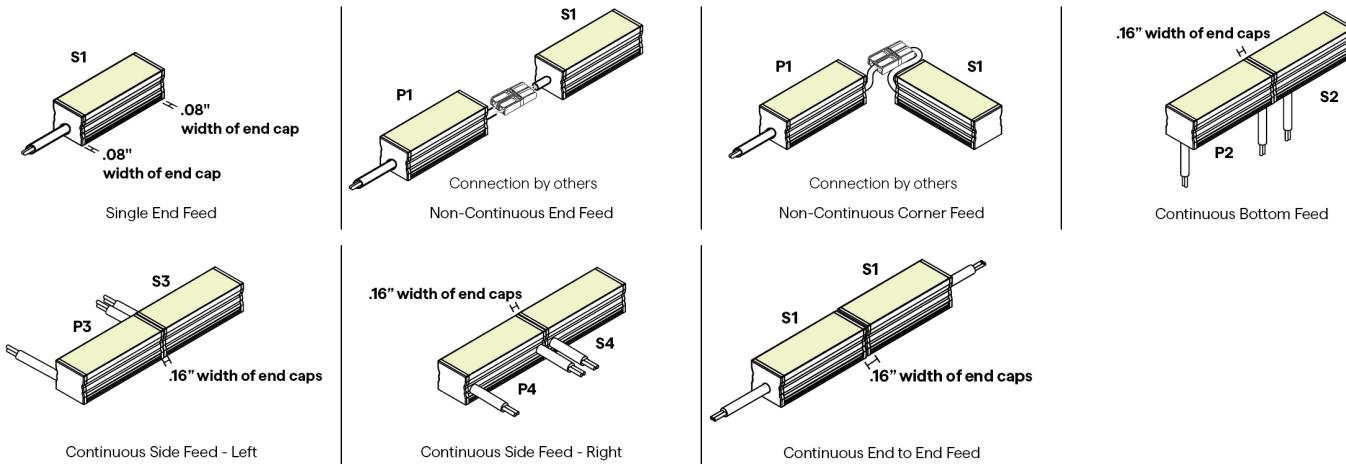

8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

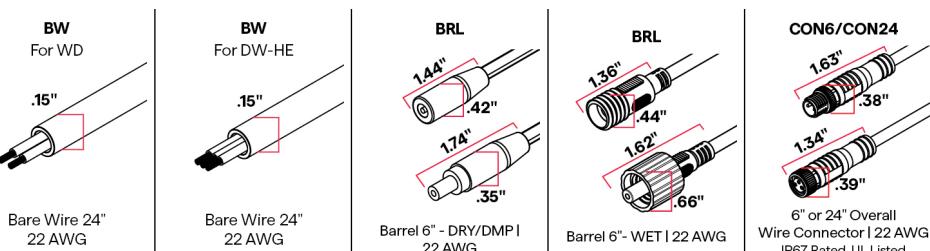

10 WIRE COLOR








ESSENTIALS TORQ-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

EXTERNAL LOUVER ACCESSORY

PLASTIC

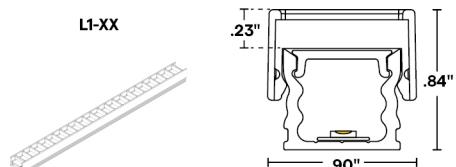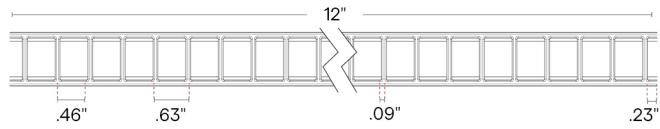


Profile with plastic louver

To order separately use
TORQ-L1-FLAT-KIT-WH or
TORQ-L1-FLAT-KIT-BK

0.71 0.53

12 MOUNTING




Stainless Steel Clip

2 clips provided for 4' or less; 4
clips provided for greater than
4'


To order separately use SST-01

Each clip comes with a #4 x
5/8" Flat Head SS



Low Profile Magnet


One M4 provided per foot.
To order separately use
MG-04



Magnet Mount
Accessory for M4

Sold separately, to order use
MMA-04
Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface



Magnet Clip

One MG provided per foot
To order separately use MG-01

13 FINISH



Satin

Black

Bronze

Custom finishes require a longer
lead time, consult factory

Custom finishes require a longer
lead time, consult factory

MMA-01



Magnet Mount
Accessory of MG-01

Sold separately, to order use
MMA-01

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface



ESSENTIALS TORQ-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

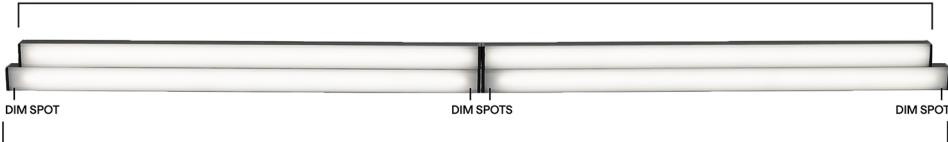

Exact Fixtures

WD DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture S1 End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.41"	10.66"	10.26"	10.36"
13"	12.41"	12.66"	12.26"	12.36"
14"	12.41"	12.66"	12.26"	12.36"
15"	14.41"	14.66"	14.26"	14.36"
16"	14.41"	14.66"	14.26"	14.36"
17"	16.41"	16.66"	16.26"	16.36"
18"	16.41"	16.66"	16.26"	16.36"
19"	18.41"	18.66"	18.26"	18.36"
20"	18.41"	18.66"	18.26"	18.36"
21"	20.41"	20.66"	20.26"	20.36"
22"	20.41"	20.66"	20.26"	20.36"
23"	22.41"	22.66"	22.26"	22.36"
24"	22.41"	22.66"	22.26"	22.36"
36"	34.41"	34.66"	34.26"	34.36"
48"	46.41"	46.66"	46.26"	46.36"
60"	58.41"	58.66"	58.26"	58.36"
72"	70.41"	70.66"	70.26"	70.36"
84"	82.41"	82.66"	82.26"	82.36"
96"	94.41"	94.66"	94.26"	94.36"



ESSENTIALS TORQ-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	10.51"		10.86"		10.41"		10.51"	
13"	12.51"		12.86"		12.41"		12.51"	
14"	12.51"		12.86"		12.41"		12.51"	
15"	14.51"		14.86"		14.41"		14.51"	
16"	14.51"		14.86"		14.41"		14.51"	
17"	16.51"		16.86"		16.41"		16.51"	
18"	16.51"		16.86"		16.41"		16.51"	
19"	18.51"		18.86"		18.41"		18.51"	
20"	18.51"		18.86"		18.41"		18.51"	
21"	20.51"		20.86"		20.41"		20.51"	
22"	20.51"		20.86"		20.41"		20.51"	
23"	22.51"		22.86"		22.41"		22.51"	
24"	22.51"		22.86"		22.41"		22.51"	
36"	34.51"		34.86"		34.41"		34.51"	
48"	46.51"		46.86"		46.41"		46.51"	
60"	58.51"		58.86"		58.41"		58.51"	
72"	70.51"		70.86"		70.41"		70.51"	
84"	82.51"		82.86"		82.41"		82.51"	
96"	94.51"		94.86"		94.41"		94.51"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle



ESSENTIALS TORQ-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	
	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN
ECO System		QTM-eLED(E)
DMX If using DW LED, wattage must be doubled		QZ-DMX
DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M 1.41" .71"	HINGE - HMB-L 1.46" 1.29"	HINGE - HMB-XL 1.46" 4"	Q-PIVOT 75" 1.03"	Q-ANGLE 1.38" 2.23"	VHB 	NJ-MEDIUM 	NJ-LARGE 	NU-LARGE 	SD-J-LARGE
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	Double sided mounting tape	J Mounting Bracket	J Mounting Bracket	U Mounting Bracket	J Mounting Bracket
MMA-01 .75" .23"	MMA-04 .93" .19"								
Magnet Mount Accessory of MG-01	Magnet Mount Accessory of MG-04								