



# ESSENTIALS TORQ-FLAT (01) SW-IA

24VDC Linear Fixtures - Surface & Recessed

white  
optics




RoHS  
COMPLIANT

5 YEAR  
WARRANTY

Declare.

Red List  
Approved



- Surface mount linear fixture
- Choose from diffused, polar, frosted, clear 60°, or clear 70° lens options for varying diode visibility and beam angles
- Offered with an optional mounting tray
- Features all wire feed options
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Utilize DMX and SPI protocols to control nominal 1" segments of specifiable white LEDs
- Optional plastic louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
TQ1IA	5.0		DRY											

Sample Part Number: TQ1IA-5.0-30-DRY-WO-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E

<b>1</b> <b>PRODUCT</b>  TQ1IA  See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  5.0 5.0W/ft	<b>3</b> <b>CCT</b>  27 2700K 30 3000K 35 3500K 40 4000K	<b>4</b> <b>RATED</b>  DRY IP20	<b>5</b> <b>EFFICIENCY</b>  STD Standard WO White Optics  WhiteOptics - Internal coating, greater lumen output	<b>6</b> <b>LENS</b>  DF Diffused PR Polar FR Frosted CL/60 Clear 60° CL/70 Clear 70°
For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages					
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed  For continuous mounting, consider bottom or side feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black		
<b>P1</b> Pass Through 1 (Input/output) - End Feed <b>P2</b> Pass Through 2 (Input/output) - Bottom Feed <b>P3</b> Pass Through 3 (Input/output) - Left Side Feed <b>P4</b> Pass Through 4 (Input/output) - Right Side Feed  For continuous mounting, consider bottom or side feed	<b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  SST Stainless Steel M4 Low Profile Magnet MG Magnet	<b>13</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze CU Custom  Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# ESSENTIALS TORQ-FLAT (01) SW-IA

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

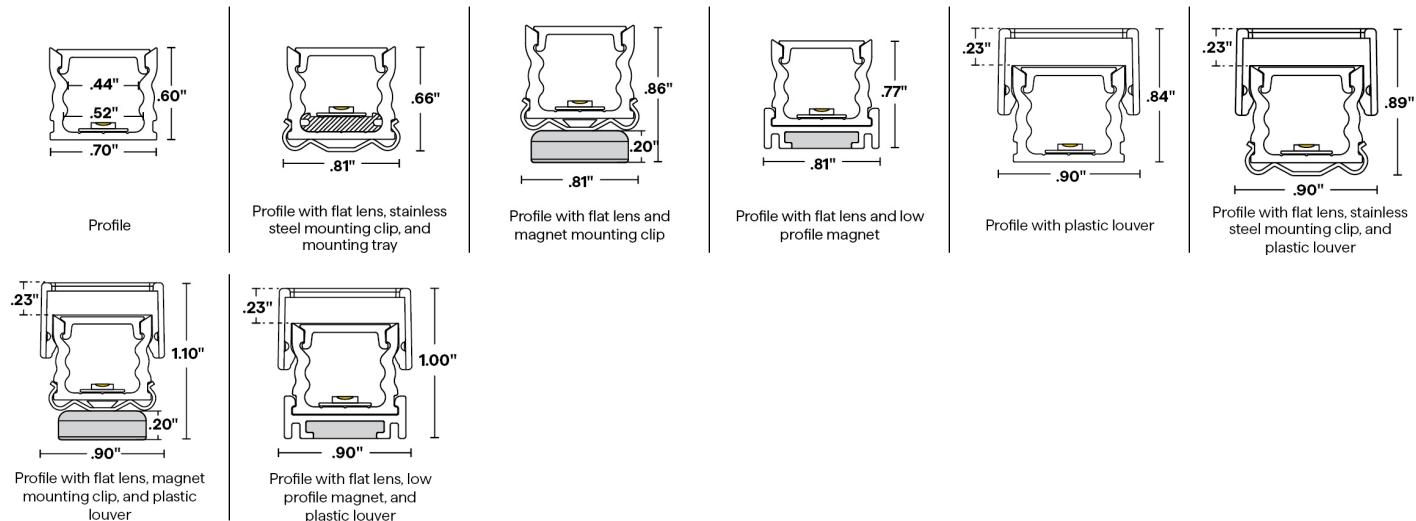


## 6 DIODE VISIBILITY



- DF - Diffused lens
- PR - Polar lens
- FR - Frosted lens
- CL - Clear lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

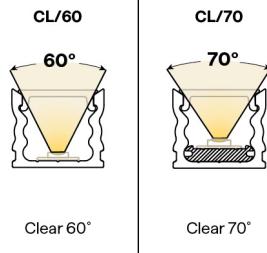


Clear 60°

Clear 70°

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)




End Feed



Bottom Feed




Side Feed - Left




Side Feed - Right


PASS THROUGH (Input/Output)




End Feed



Bottom Feed



Side Feed - Left




Side Feed - Right



# ESSENTIALS TORQ-FLAT (01) SW-IA


24VDC Linear Fixtures - Surface & Recessed

## CONFIGURATION OPTIONS

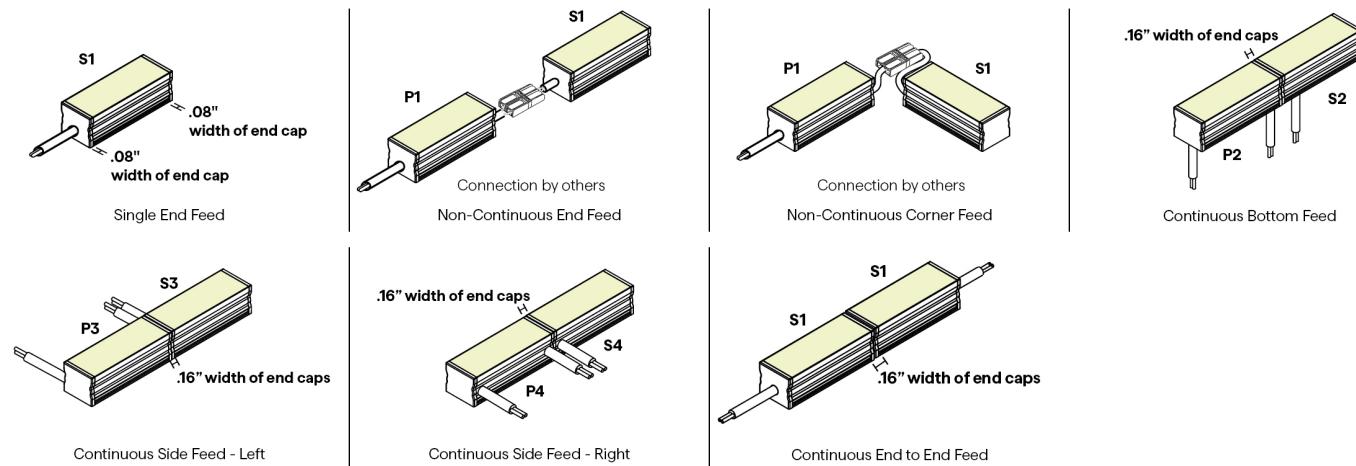

## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

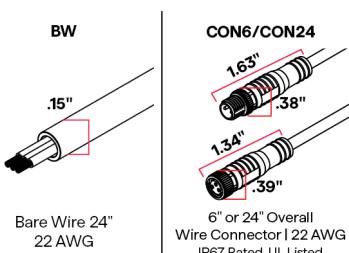


## 10 WIRE COLOR




## EXTERNAL LOUVER ACCESSORY

### PLASTIC

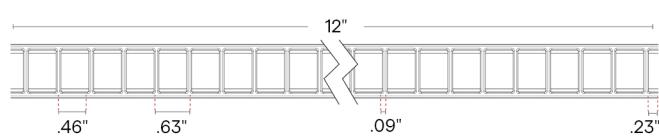

### L1-XX

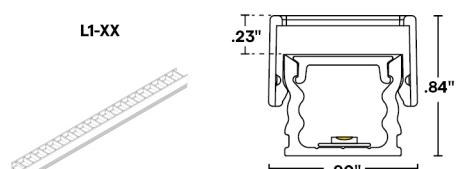

Lumen Multiplier

WH BK



Profile with plastic louver





To order separately use  
TORQ-L1-FLAT-KIT-WH or  
TORQ-L1-FLAT-KIT-BK



## ESSENTIALS TORQ-FLAT (01) SW-IA

24VDC Linear Fixtures - Surface & Recessed

### 12 MOUNTING

SST	M4	MMA-04	MG
 Stainless Steel Clip 2 clips provided for 4' or less; 4 clips provided for greater than 4' To order separately use SST-01 Each clip comes with a #4 x 5/8" Flat Head SS	 Low Profile Magnet One M4 provided per foot. To order separately use MG-04	 Magnet Mount Accessory for M4 Sold separately, to order use MMA-04 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface	 Magnet Clip One MG provided per foot To order separately use MG-01

### 13 FINISH



Custom finishes require a longer lead time, consult factory


### MMA-01

 Magnet Mount Accessory of MG-01
Sold separately, to order use MMA-01
Each bracket comes with 2 #6 x 5/8" Flat Head SS
Required when mounting to a non-magnetic surface

### 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

#### Optimal Fixtures

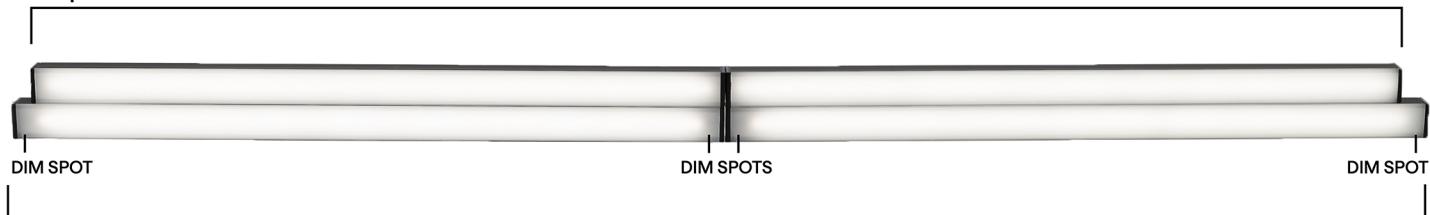

#### Exact Fixtures



# ESSENTIALS TORQ-FLAT (01) SW-IA

24VDC Linear Fixtures - Surface & Recessed

## SW-IA DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $\pm 0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.975"
13"	1.475"
14"	.3"-1.975"
15"	.8"
16"	1.3"
17"	1.8"
18"	.625"
19"	1.125"
20"	1.625"
21"	.45"
22"	.95"
23"	1.45"
24"	1.95"
36"	1.25"
48"	0.55"
60"	1.525"
72"	0.825"
84"	1.8"
96"	1.1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.46"	10.71"	10.71"	10.46"	10.46"	10.56"	10.56"	10.56"
13"	10.46"	10.71"	10.71"	10.46"	10.46"	10.56"	10.56"	10.56"
14"	13.81"	13.81"	10.71"	14.06"	13.81"	13.81"	13.91"	13.91"
15"	13.81"	13.81"	14.06"	13.81"	13.81"	13.81"	13.91"	13.91"
16"	13.81"	14.06"	13.81"	13.81"	13.81"	13.81"	13.91"	13.91"
17"	13.81"	14.06"	13.81"	13.81"	13.81"	13.81"	13.91"	13.91"
18"	17.16"	17.41"	17.41"	17.16"	17.16"	17.16"	17.26"	17.26"
19"	17.16"	17.41"	17.41"	17.16"	17.16"	17.16"	17.26"	17.26"
20"	17.16"	17.41"	17.41"	17.16"	17.16"	17.16"	17.26"	17.26"
21"	20.51"	20.76"	20.76"	20.51"	20.51"	20.51"	20.61"	20.61"
22"	20.51"	20.76"	20.76"	20.51"	20.51"	20.51"	20.61"	20.61"
23"	20.51"	20.76"	20.76"	20.51"	20.51"	20.51"	20.61"	20.61"
24"	23.86"	20.76"	20.76"	23.86"	23.86"	23.86"	23.96"	23.96"
36"	33.91"	34.16"	34.16"	33.91"	33.91"	33.91"	34.01"	34.01"
48"	47.31"	47.56"	47.56"	47.31"	47.31"	47.31"	47.41"	47.41"
60"	57.36"	57.61"	57.61"	57.36"	57.36"	57.36"	57.46"	57.46"
72"	70.76"	71.01"	71.01"	70.76"	70.76"	70.76"	70.86"	70.86"
84"	80.81"	81.06"	81.06"	80.81	80.81	80.81	80.91"	80.91"
96"	94.21"	94.46"	94.46"	94.21"	94.21"	94.21"	94.31"	94.31"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has  $\pm 5\%$  tolerance.

DIM TO LEVEL	INDOOR
	SW-IA
1%	QT-CAB-eLED+IA QTM-eLED+IA

DIMMING PROTOCOL	INDOOR
	SW-IA
DMX	QT-CAB-eLED+IA QTM-eLED+IA



# ESSENTIALS TORQ-FLAT (01) SW-IA

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b> 1.41" x .71"	<b>HINGE - HMB-L</b> 1.46" x 1.29"	<b>HINGE - HMB-XL</b> 1.46" x 4"	<b>Q-PIVOT</b> .75" x 1.03"	<b>Q-ANGLE</b> 1.38" x 2.23"	<b>VHB</b> Double sided mounting tape	<b>NJ-MEDIUM</b> J Mounting Bracket	<b>NJ-LARGE</b> J Mounting Bracket	<b>NU-LARGE</b> U Mounting Bracket	<b>SD-J-LARGE</b> J Mounting Bracket
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory					
<b>MMA-01</b> .23" x .75"					<b>MMA-04</b> .19" x .93"				
Magnet Mount Accessory of MG-01					Magnet Mount Accessory of MG-04				

## COMPATIBLE WIRING ACCESSORIES

<b>Q-mini-J</b> 2" x 1.25"	<b>Q-mini-J5</b> 2.80" x 2.27"	<b>BARREL-EXT</b> 8ft barrel cable extender DRY ONLY	<b>BARREL FOUR-FER</b> Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	<b>CON120-EXT</b> 10ft Con cable extender DRY/DMP/WET	<b>CON FOUR-FER</b> Splits lead from one to four LED Con connectors DRY/DMP/WET	<b>CON M - BARREL F</b> Male con to barrel cable adaptor DRY/DMP
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	ULL Listed, miniature junction box, DRY/DMP (WET rated with silicone)					

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity