




# ESSENTIALS TORQ-OPTICS (02)

## TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



white optics



NEC  
410.3 and 10.18  
Closet Rated in  
1.5HE



JAB-2019  
HE only

5 YEAR  
WARRANTY



### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: TQ2DW-2.5HE-20/30-DRY-WO-12-P1-BW-BW-BK-CL2-SST-BK-48"-E

<b>1</b> <b>PRODUCT</b>  TQ2DW TQ2DW-USA  Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE  1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	<b>3</b> <b>CCT</b>  20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K  24/30 2400K/3000K 27/40 2700K/4000K	<b>4</b> <b>RATED</b>  DRY IP20  DMP IP54	<b>5</b> <b>EFFICIENCY</b>  STD Standard White Optics WO WhiteOptics - Internal coating, greater lumen output	<b>6</b> <b>LENS</b>  12 Optical 12° 40 Optical 40° DRY or DMP only  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed  For continuous mounting, consider bottom or side feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black		
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  SST Stainless Steel M4 Low Profile Magnet MG Magnet	<b>13</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze CU Custom  Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# ESSENTIALS TORQ-OPTICS (02) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

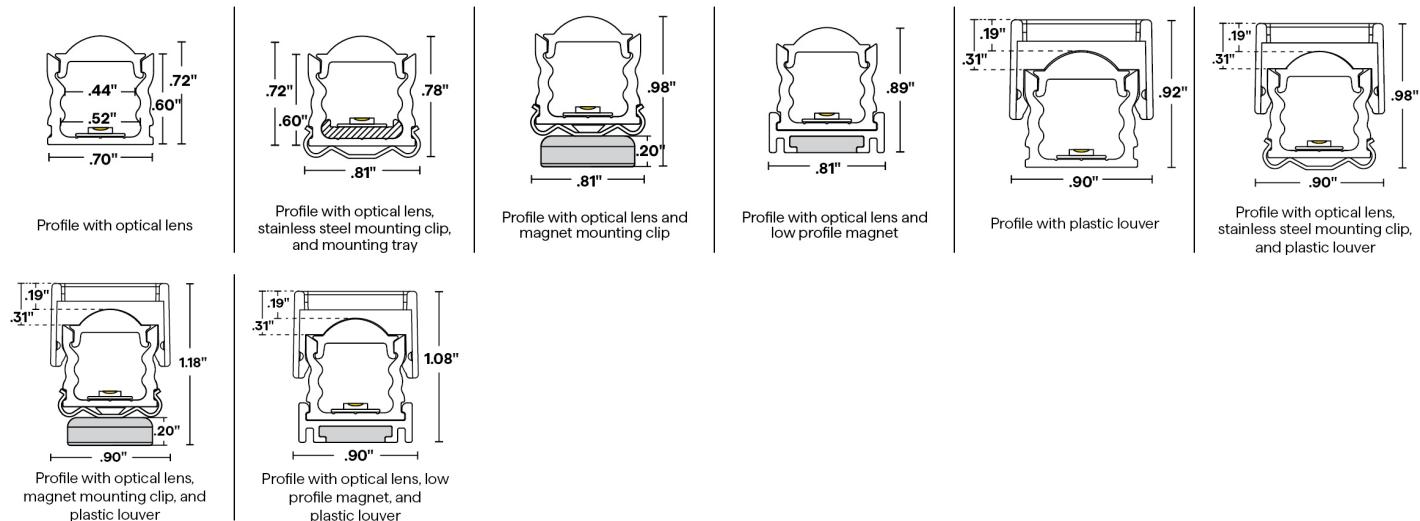

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with TQ2DW-\*\*-30-DRY-STD

	1.5HE W/FT	2.5HE W/FT	4.0HE W/FT			
LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	
12	128	98	202	98	315	98
40	160	98	253	98	394	98

[Calculated L70 = 70000 hrs]  
Tested with TQ2DW-\*\*-30-DRY-WO

	1.5HE W/FT	2.5HE W/FT	4.0HE W/FT			
LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	
12	134	98	211	98	328	98
40	167	98	264	98	411	98


## 6 DIODE VISIBILITY



Optical lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

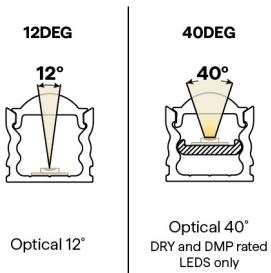



# ESSENTIALS TORQ-OPTICS (02) TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## TEMPERATURE RATINGS


		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	135°F	-4°F	140°F	-4°F	120°F	-4°F	130°F	-4°F	110°F
DMP	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	135°F	-4°F	115°F	**	**	**	**

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

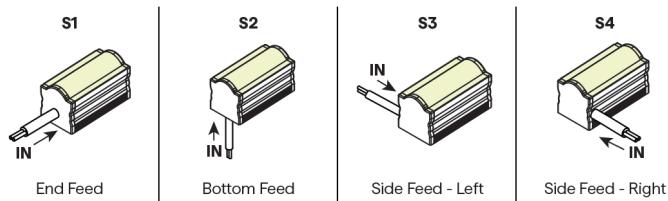


PASS THROUGH (Input/Output)

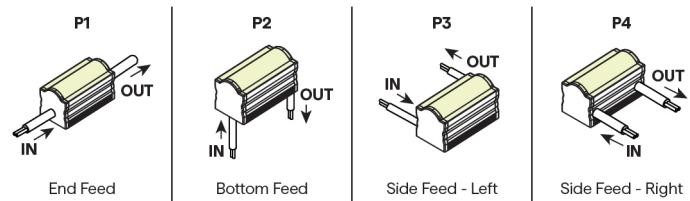


## CONFIGURATION OPTIONS

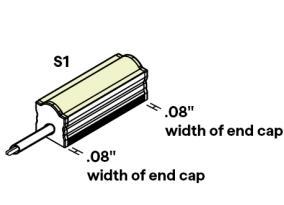


Single End Feed

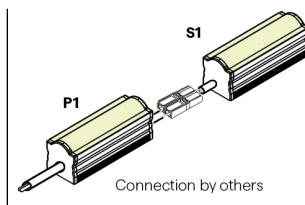


Non-Continuous End Feed

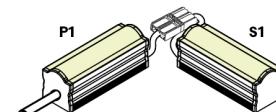


Non-Continuous Corner Feed




Continuous Bottom Feed

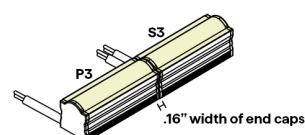

Continuous Side Feed - Left

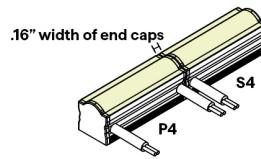


Continuous Side Feed - Right

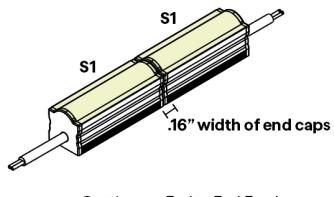

Continuous End to End Feed

## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

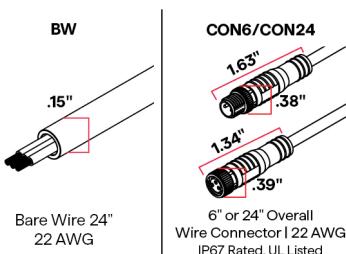

BW

CON6/CON24

1.63"

1.34"

38"


39"

6" or 24" Overall

Wire Connector | 22 AWG

IP67 Rated, UL Listed

## 10 WIRE COLOR



White

Black



## ESSENTIALS TORQ-OPTICS (02) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

### 12 MOUNTING

SST	M4	MMA-04	MG
Satin Steel Clip	Low Profile Magnet	Magnet Mount Accessory for M4	Magnet Clip
2 clips provided for 4' or less; 4 clips provided for greater than 4' To order separately use SST-01 Each clip comes with a #4 x 5/8" Flat Head SS	One M4 provided per foot. To order separately use MG-04	Sold separately, to order use MMA-04 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface	One MG provided per foot To order separately use MG-01

### 13 FINISH



Custom finishes require a longer lead time, consult factory


Custom finishes require a longer lead time, consult factory

### MMA-01

Magnet Mount Accessory of MG-01
Sold separately, to order use MMA-01
Each bracket comes with 2 #6 x 5/8" Flat Head SS
Required when mounting to a non-magnetic surface

### 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

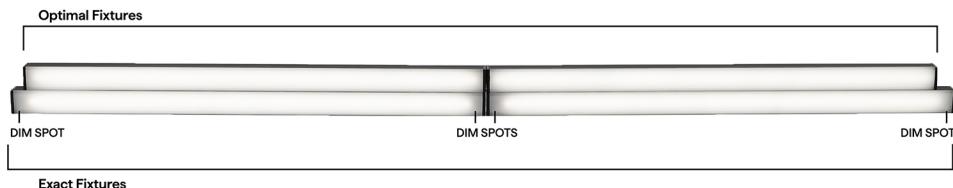



# ESSENTIALS TORQ-OPTICS (02) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## DW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
	End Feed	Bottom Feed	Side Feed - Left	Side Feed - Right
12"	10.51"	10.86"	10.41"	10.51"
13"	12.51"	12.86"	12.41"	12.51"
14"	12.51"	12.86"	12.41"	12.51"
15"	14.51"	14.86"	14.41"	14.51"
16"	14.51"	14.86"	14.41"	14.51"
17"	16.51"	16.86"	16.41"	16.51"
18"	16.51"	16.86"	16.41"	16.51"
19"	18.51"	18.86"	18.41"	18.51"
20"	18.51"	18.86"	18.41"	18.51"
21"	20.51"	20.86"	20.41"	20.51"
22"	20.51"	20.86"	20.41"	20.51"
23"	22.51"	22.86"	22.41"	22.51"
24"	22.51"	22.86"	22.41"	22.51"
36"	34.51"	34.86"	34.41"	34.51"
48"	46.51"	46.86"	46.41"	46.51"
60"	58.51"	58.86"	58.41"	58.51"
72"	70.51"	70.86"	70.41"	70.51"
84"	82.51"	82.86"	82.41"	82.51"
96"	94.51"	94.86"	94.41"	94.51"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has  $+/- 5\%$  tolerance.

DIM TO LEVEL	INDOOR	
	DW-HE Tunable Applications	
0.1%		QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX
1%		QZ-DALI-DT8
10%		Non-Dim Power Supply with TW App Dongle



# ESSENTIALS TORQ-OPTICS (02) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b> 1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b> 1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b> 1.46" 4" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b> .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b> 2.23" 1.38" Adjustable mounting accessory	<b>VHB</b> Double sided mounting tape	<b>NU-GRAZER</b> U Mounting Bracket	<b>NJ-GRAZER</b> J Mounting Bracket	<b>BL-GRAZER</b> Backwards L Mounting Bracket	<b>NJ-MEDIUM</b> J Mounting Bracket
<b>MMA-01</b> .23" .75" Magnet Mount Accessory of MG-01	<b>MMA-04</b> .19" .93" Magnet Mount Accessory of MG-04								