





ESSENTIALS TORQ-OPTICS (02)

STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

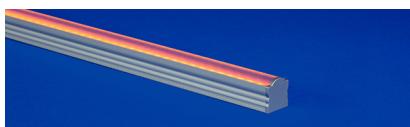

- Surface mount linear fixture for grazing
- Choose from a 12° or 40° beam angle
- Mounting tray available
- Features all wire feed options
- Ideal for direct and indirect applications
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Red, Green, Blue or Amber LEDs available
- Q-Tran Red & Amber LED products are Florida Fish and Wildlife Conservation Commission certified, making them safe for turtles and other wildlife
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional plastic louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/OPTIMAL
TQ2SC	5.0													

Sample Part Number: TQ2SC-5.0-GR-DRY-WO-12-P1-BW-BW-BK-CL2-SST-BK-48"-E


1 PRODUCT TQ2SC See following pages for compatible power supplies.	2 WATTS/FT 5.0 5.0W/ft	3 CCT A Amber B Blue G Green R Red	4 RATED DRY IP20 DMP IP54 WET IP67	5 EFFICIENCY STD Standard WO White Optics WhiteOptics - Internal coating, greater lumen output	6 LENS 12 Optical 12° 40 Optical 40° DRY or DMP only For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	10 WIRE COLOR WH White BK Black N/A For Barrel wet barrel only available in black		
For continuous mounting, consider bottom or side feed					BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
					BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet	13 FINISH ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



ESSENTIALS TORQ-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

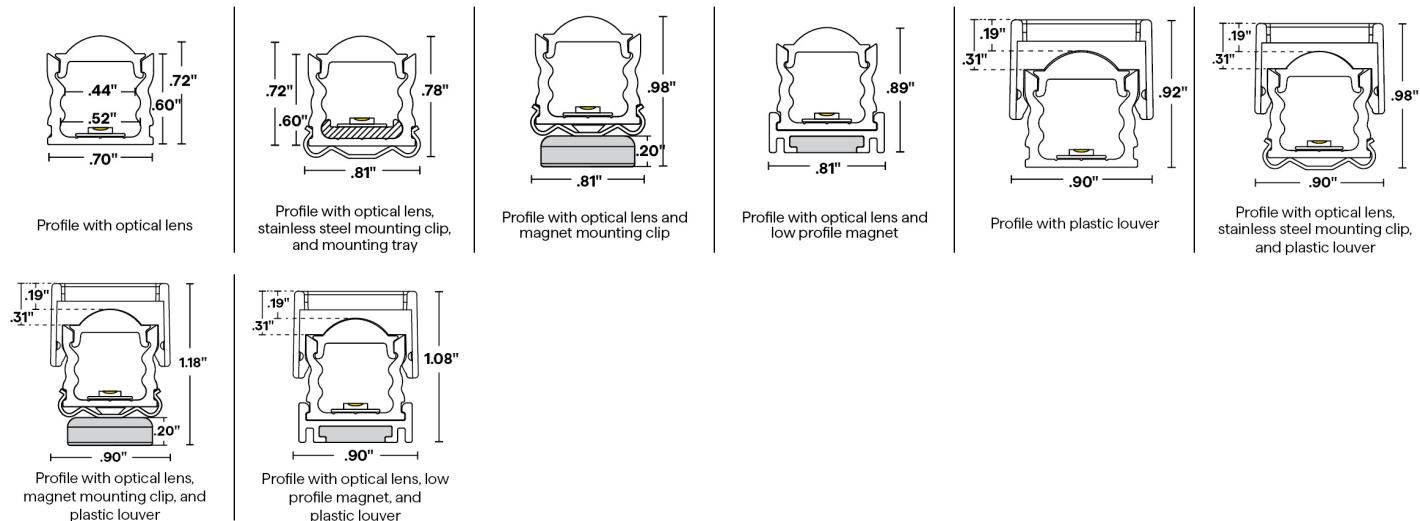

2 DELIVERED LUMENS

[Calculated L70 = 30000 hrs]
Tested with TQ2SC-5.0-**-DRY-STD

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
12	75	633	405	517	105	466	68	597
40	94	633	508	517	132	466	85	597

[Calculated L70 = 30000 hrs]
Tested with TQ2SC-5.0-**-DRY-WO


	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
12	78	633	422	517	110	466	71	597
40	98	633	529	517	137	466	88	597

6 DIODE VISIBILITY



PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

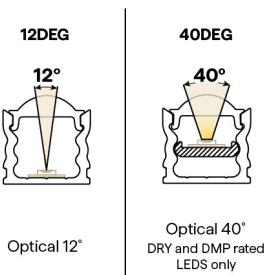



ESSENTIALS TORQ-OPTICS (02) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


		5.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	120°F
WET	Ambient Operating Temp - Surface	-4°F	120°F

7 WIRE INPUT/OUTPUT








SINGLE (Input only)

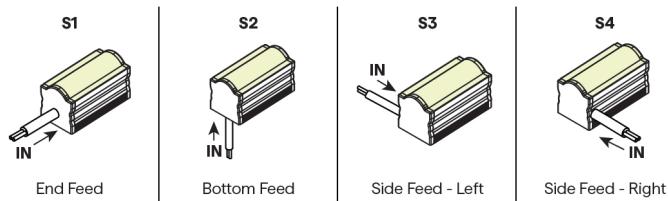

PASS THROUGH (Input/Output)


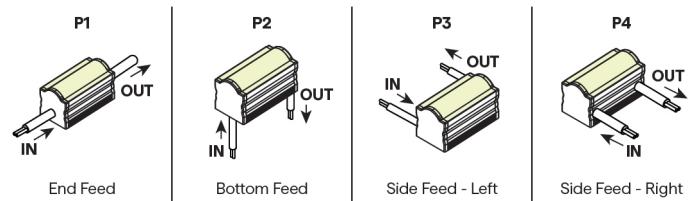


CONFIGURATION OPTIONS

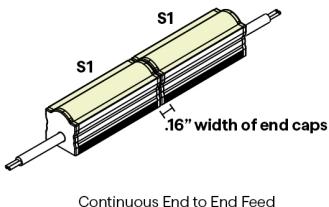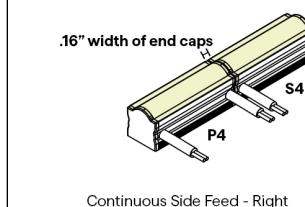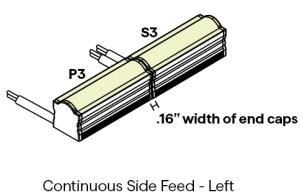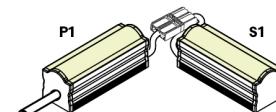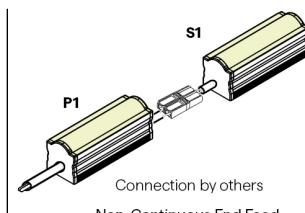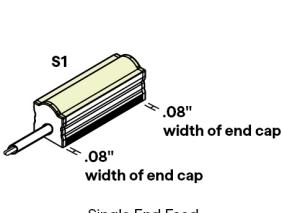


8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

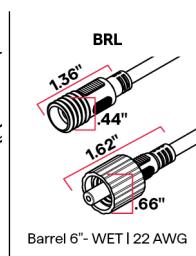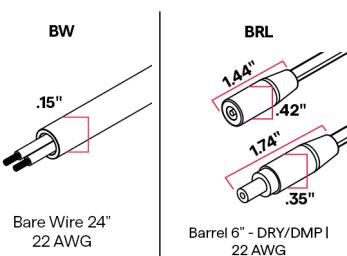

10 WIRE COLOR



White

Black





ESSENTIALS TORQ-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

EXTERNAL LOUVER ACCESSORY


When using 40DEG option with a side feed input/output, routing will be necessary on the plastic louver to ensure unobstructed wire exits.

PLASTIC

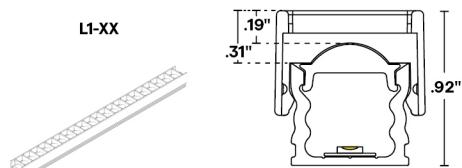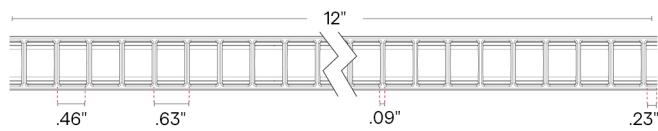

L1-XX

Lumen Multiplier
WH BK



Profile with plastic louver


To order separately use
TORQ-L1-OPTICS-KIT-WH or
TORQ-L1-OPTICS-KIT-BK

0.74

0.57

12 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4
clips provided for greater than
4'

To order separately use SST-01

Each clip comes with a #4 x
5/8" Flat Head SS

M4




Low Profile Magnet

One M4 provided per foot.

To order separately use
MG-04

MMA-04




Magnet Mount
Accessory for M4

Sold separately, to order use
MMA-04

Each bracket comes with 2 #6
x 5/8" Flat Head SS

MG



Magnet Clip

One MG provided per foot

To order separately use MG-01

MMA-01



Magnet Mount
Accessory of MG-01

Sold separately, to order use
MMA-01

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface

13 FINISH



Satin

Black

Bronze

Custom finishes require a longer
lead time, consult factory



ESSENTIALS TORQ-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed


14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

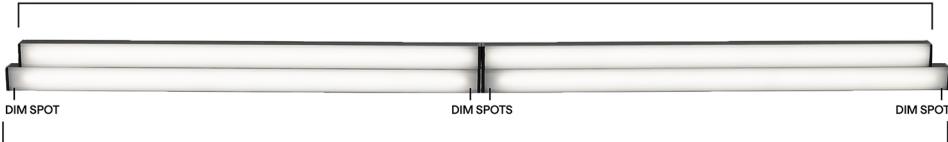

Exact Fixtures

SC DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture S1 End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.41"	10.66"	10.26"	10.36"
13"	12.41"	12.66"	12.26"	12.36"
14"	12.41"	12.66"	12.26"	12.36"
15"	14.41"	14.66"	14.26"	14.36"
16"	14.41"	14.66"	14.26"	14.36"
17"	16.41"	16.66"	16.26"	16.36"
18"	16.41"	16.66"	16.26"	16.36"
19"	18.41"	18.66"	18.26"	18.36"
20"	18.41"	18.66"	18.26"	18.36"
21"	20.41"	20.66"	20.26"	20.36"
22"	20.41"	20.66"	20.26"	20.36"
23"	22.41"	22.66"	22.26"	22.36"
24"	22.41"	22.66"	22.26"	22.36"
36"	34.41"	34.66"	34.26"	34.36"
48"	46.41"	46.66"	46.26"	46.36"
60"	58.41"	58.66"	58.26"	58.36"
72"	70.41"	70.66"	70.26"	70.36"
84"	82.41"	82.66"	82.26"	82.36"
96"	94.41"	94.66"	94.26"	94.36"



ESSENTIALS TORQ-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

SC WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	10.61"		10.76"		10.51"		10.61"	
13"	12.61"		12.76"		12.51"		12.61"	
14"	12.61"		12.76"		12.51"		12.61"	
15"	14.61"		14.76"		14.51"		14.61"	
16"	14.61"		14.76"		14.51"		14.61"	
17"	16.61"		16.76"		16.51"		16.61"	
18"	16.61"		16.76"		16.51"		16.61"	
19"	18.61"		18.76"		18.51"		18.61"	
20"	18.61"		18.76"		18.51"		18.61"	
21"	20.61"		20.76"		20.51"		20.61"	
22"	20.61"		20.76"		20.51"		20.61"	
23"	22.61"		22.76"		22.51"		22.61"	
24"	22.61"		22.76"		22.51"		22.61"	
36"	34.61"		34.76"		34.51"		34.61"	
48"	46.61"		46.76"		46.51"		46.61"	
60"	58.61"		58.76"		58.51"		58.61"	
72"	70.61"		70.76"		70.51"		70.61"	
84"	82.61"		82.76"		82.51"		82.61"	
96"	94.61"		94.76"		94.51"		94.61"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SC	SC	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1			QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP			Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6			Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle			



ESSENTIALS TORQ-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M 1.41" .71"	HINGE - HMB-L 1.46" 1.29"	HINGE - HMB-XL 1.46"	Q-PIVOT 4" .75" 1.03"	Q-ANGLE 1.38" 2.23"	NU-GRAZER 	NJ-GRAZER 	BL-GRAZER 	NJ-MEDIUM 	MMA-01 1.23" .75"
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	U Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket	J Mounting Bracket	Magnet Mount Accessory of MG-01

MMA-04




Magnet Mount Accessory of MG-04
.19" .93"



ESSENTIALS TORQ-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

 Q-mini-J 2" 1.25"	 Q-mini-J5 2.80" 2.27"	 BARREL-EXT 8ft barrel cable extender DRY ONLY	 BARREL FOUR-FER Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	 CON120-EXT 10ft Con cable extender DRY/DMP/WET	 CON FOUR-FER Splits lead from one to four LED Con connectors DRY/DMP/WET	 CON M - BARREL F Male con to barrel cable adaptor DRY/DMP
--	--	--	---	---	---	---