



ESSENTIALS TORQ-OPTICS (02) SW-IA

24VDC Linear Fixtures - Surface & Recessed

white
optics





RoHS
COMPLIANT

5 YEAR
WARRANTY

Declare.

Red List
Approved

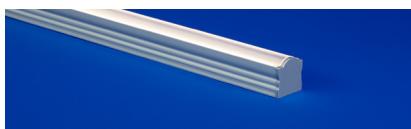

- Surface mount linear fixture for grazing
- Choose from a 12° or 40° beam angle
- Mounting tray available
- Features all wire feed options
- Ideal for direct and indirect applications
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Utilize DMX and SPI protocols to control nominal 1" segments of specifiable white LEDs
- Optional plastic louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS
TQ2IA	5.0		DRY		

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: TQ2IA-5.0-30-DRY-WO-12-P1-BW-BW-BK-CL2-SST-BK-48"-E

1 PRODUCT TQ2IA See following pages for compatible power supplies.	2 WATTS/FT 5.0 5.0W/ft	3 CCT 27 2700K 30 3000K 35 3500K 40 4000K	4 RATED DRY IP20	5 EFFICIENCY STD Standard White Optics WhiteOptics - Internal coating, greater lumen output	6 LENS 12 Optical 12° 40 Optical 40° DRY or DMP only For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages
7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed For continuous mounting, consider bottom or side feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR WH White BK Black		
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet	13 FINISH ST Satin BK Black BZ Bronze CU Custom	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




ESSENTIALS TORQ-OPTICS (02) SW-IA

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

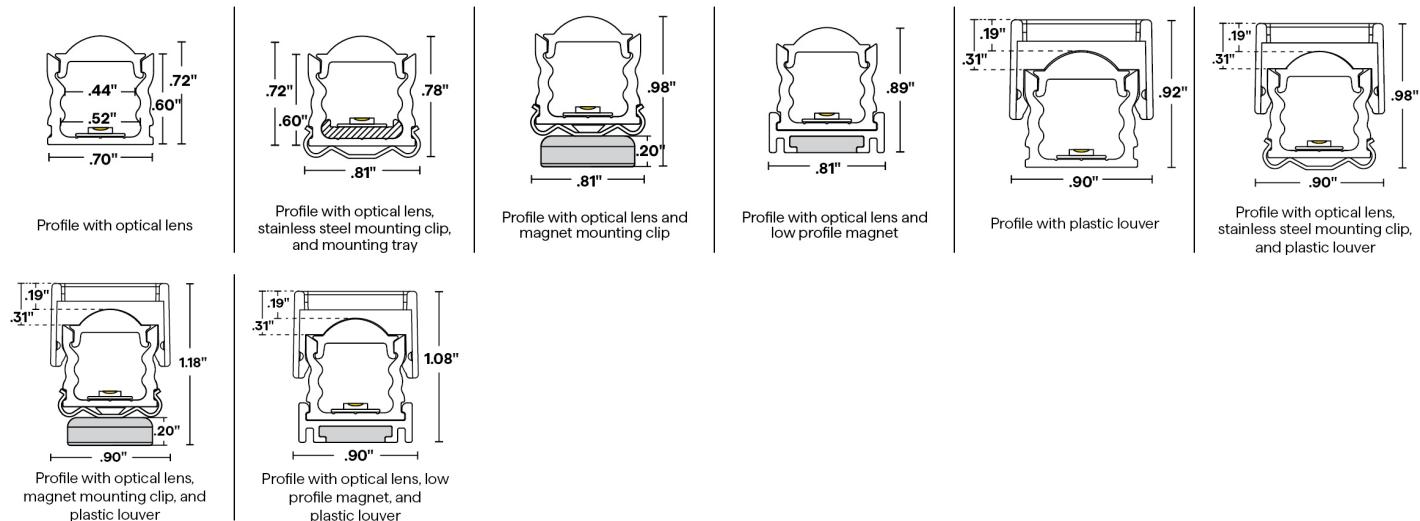


6 DIODE VISIBILITY



Optical lens


PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.




7 WIRE INPUT/OUTPUT

SINGLE (Input only)

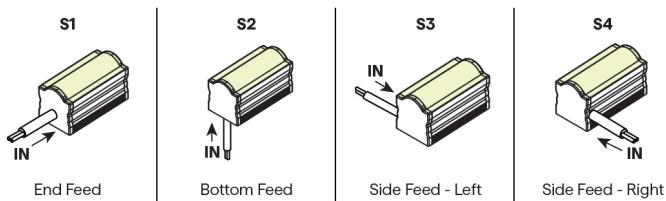

PASS THROUGH (Input/Output)

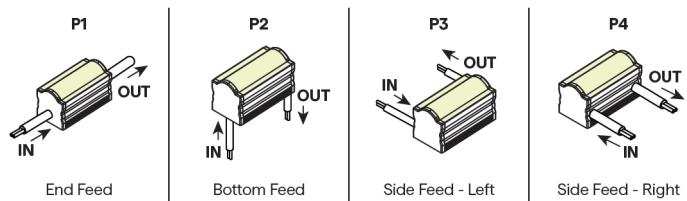





ESSENTIALS TORQ-OPTICS (02) SW-IA

24VDC Linear Fixtures - Surface & Recessed


CONFIGURATION OPTIONS

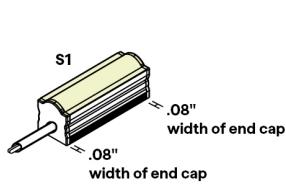


Single End Feed




Non-Continuous End Feed




Non-Continuous Corner Feed




Continuous Bottom Feed



Continuous Side Feed - Left

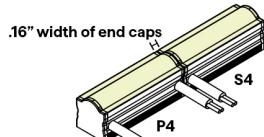


Continuous Side Feed - Right



Continuous End to End Feed

8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out





ESSENTIALS TORQ-OPTICS (02) SW-IA

24VDC Linear Fixtures - Surface & Recessed

12 MOUNTING

SST	M4	MMA-04	MG
Stainless Steel Clip	Low Profile Magnet	Magnet Mount Accessory for M4	Magnet Clip
2 clips provided for 4' or less; 4 clips provided for greater than 4' To order separately use SST-01 Each clip comes with a #4 x 5/8" Flat Head SS	One M4 provided per foot. To order separately use MG-04	Sold separately, to order use MMA-04 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface	One MG provided per foot To order separately use MG-01

13 FINISH




MMA-01

	Magnet Mount Accessory of MG-01 Sold separately, to order use MMA-01 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface
--	---

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

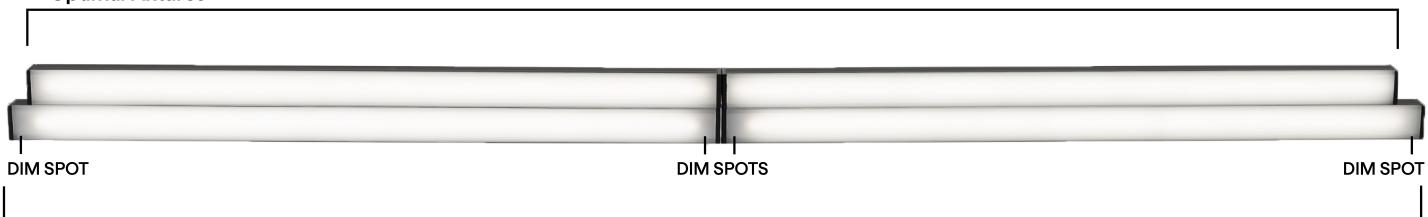

Exact Fixtures



ESSENTIALS TORQ-OPTICS (02) SW-IA

24VDC Linear Fixtures - Surface & Recessed

SW-IA DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $\pm 0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.975"
13"	1.475"
14"	.3"-1.975"
15"	.8"
16"	1.3"
17"	1.8"
18"	.625"
19"	1.125"
20"	1.625"
21"	.45"
22"	.95"
23"	1.45"
24"	1.95"
36"	1.25"
48"	0.55"
60"	1.525"
72"	0.825"
84"	1.8"
96"	1.1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.46"	10.71"	10.46"	10.56"
13"	10.46"	10.71"	10.46"	10.56"
14"	13.81"	10.71"	13.81"	13.91"
15"	13.81"	14.06"	13.81"	13.91"
16"	13.81"	14.06"	13.81"	13.91"
17"	13.81"	14.06"	13.81"	13.91"
18"	17.16"	17.41"	17.16"	17.26"
19"	17.16"	17.41"	17.16"	17.26"
20"	17.16"	17.41"	17.16"	17.26"
21"	20.51"	20.76"	20.51"	20.61"
22"	20.51"	20.76"	20.51"	20.61"
23"	20.51"	20.76"	20.51"	20.61"
24"	23.86"	20.76"	23.86"	23.96"
36"	33.91"	34.16"	33.91"	34.01"
48"	47.31"	47.56"	47.31"	47.41"
60"	57.36"	57.61"	57.36"	57.46"
72"	70.76"	71.01"	70.76"	70.86"
84"	80.81"	81.06"	80.81	80.91"
96"	94.21"	94.46"	94.21"	94.31"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has $\pm 5\%$ tolerance.

DIM TO LEVEL	INDOOR
	SW-IA
1%	QT-CAB-eLED+IA QTM-eLED+IA

DIMMING PROTOCOL	INDOOR
	SW-IA
DMX	QT-CAB-eLED+IA QTM-eLED+IA

COMPATIBLE MOUNTING ACCESSORIES


HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE	NU-GRAZER	NJ-GRAZER	BL-GRAZER	NJ-MEDIUM
1.41" .71" 1.46" 1.29" 4" 1.46" .75" 1.38" 2.23"	1.41" .71" 1.46" 1.29" 4" 1.46" .75" 1.38" 2.23"	1.41" .71" 1.46" 1.29" 4" 1.46" .75" 1.38" 2.23"	4" 1.46" .75" 1.38" 2.23"	1.38" 2.23"				
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	U Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket	J Mounting Bracket



ESSENTIALS TORQ-OPTICS (02) SW-IA

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

 Q-mini-J 2" 1.25"	 Q-mini-J5 2.80" 2.27"	 BARREL-EXT 8ft barrel cable extender DRY ONLY	 BARREL FOUR-FER Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	 CON120-EXT 10ft Con cable extender DRY/DMP/WET	 CON FOUR-FER Splits lead from one to four LED Con connectors DRY/DMP/WET	 CON M - BARREL F Male con to barrel cable adaptor DRY/DMP
--	--	--	---	---	---	---