




ESSENTIALS VEVE™-OPTICS (02)

STATIC COLOR

24VDC Linear Fixtures - Corner & Surface



- Corner and surface mount linear fixture with optical lens
- Choose from a 20° or 45° beam angle
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Red, Green, Blue or Amber LEDs available
- Q-Tran Red & Amber LED products are Florida Fish and Wildlife Conservation Commission certified, making them safe for turtles and other wildlife
- Can be suitable for exterior use when specified as wet, contact factory for more information

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/OPTIMAL
VV2SC	5.0			STD										

Sample Part Number: **VV2SC-5.0-GR-DRY-STD-20-P1-BW-BW-BK-CL2-SST-BK-48"-E**


1 PRODUCT VV2SC See following pages for compatible power supplies.	2 WATTS/FT 5.0 5.0W/ft	3 CCT A Amber B Blue G Green R Red	4 RATED DRY IP20 DMP IP54 WET IP67 Can be suitable for exterior use, contact factory for more information	5 EFFICIENCY STD Standard	6 LENS 20 Optical 20° 45 Optical 45° DRY or DMP only For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR WH White BK Black N/A For Barrel wet barrel only available in black		
P1 Pass Through 1 (Input/output) - End Feed					
					BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
					BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet	13 FINISH ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



ESSENTIALS VEVE™-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Corner & Surface

1 PRODUCT - DIMENSIONS

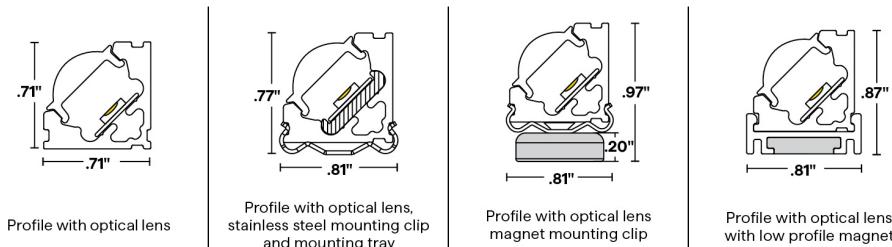

2 DELIVERED LUMENS

[Calculated L70 = 30000 hrs]
Tested with VV2SC-5.0-**-DRY-STD

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
20	87	633	470	517	122	466	78	597
45	95	633	512	517	133	466	85	597


6 DIODE VISIBILITY



Optical lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



Optical 20°

Optical 45°

TEMPERATURE RATINGS

		5.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	120°F
WET	Ambient Operating Temp - Surface	-4°F	120°F




ESSENTIALS VEVE™-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Corner & Surface


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output)




End Feed


CONFIGURATION OPTIONS




Single End Feed



Non-Continuous End Feed




Non-Continuous Corner Feed

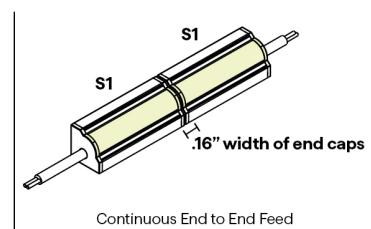

Continuous End to End Feed

8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



Bare Wire 24"
22 AWG




Barrel 6" - DRY/DMP |
22 AWG



Barrel 6" - WET | 22 AWG



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed



White

Black



ESSENTIALS VEVE™-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Corner & Surface

12 MOUNTING

SST	M4	MMA-04	MG
Satin Steel Clip	Low Profile Magnet	Magnet Mount Accessory for M4	Magnet Clip
2 clips provided for 4' or less; 4 clips provided for greater than 4' To order separately use SST-01 Each clip comes with a #4 x 5/8" Flat Head SS	One M4 provided per foot. To order separately use MG-04	Sold separately, to order use MMA-04 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface	One MG provided per foot To order separately use MG-01

13 FINISH



Custom finishes require a longer lead time, consult factory

MMA-01


Magnet Mount Accessory of MG-01
Sold separately, use MMA-01
Each bracket comes with 2 #6 x 5/8" Flat Head SS
Required when mounting to a non-magnetic surface

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

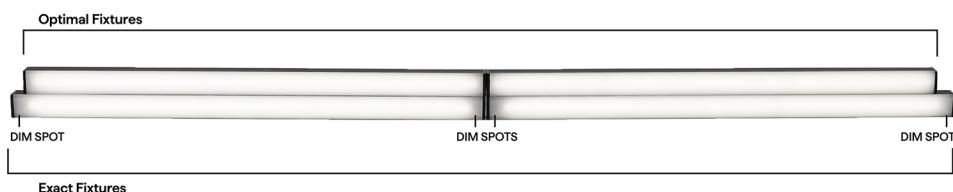



ESSENTIALS VEVE™-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Corner & Surface

SC DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	IN
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

OPTIMAL LENGTH

Requested Nominal Length	S1	P1
	S1	P1
12"	11.59"	11.34"
13"	12.59"	12.34"
14"	13.59"	13.34"
15"	14.59"	14.34"
16"	15.59"	15.34"
17"	16.59"	16.34"
18"	17.59"	17.34"
19"	18.59"	18.34"
20"	19.59"	19.34"
21"	20.59"	20.34"
22"	21.59"	21.34"
23"	22.59"	22.34"
24"	23.59"	23.34"
36"	35.59"	35.34"
48"	47.59"	47.34"
60"	59.59"	59.34"
72"	71.59"	71.34"
84"	83.59"	83.34"
96"	95.59"	95.34"

SC WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	IN
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

OPTIMAL LENGTH

Requested Nominal Length	S1	P1
	S1	P1
12"	11.39"	11.24"
13"	12.39"	12.24"
14"	13.39"	13.24"
15"	14.39"	14.24"
16"	15.39"	15.24"
17"	16.39"	16.24"
18"	17.39"	17.24"
19"	18.39"	18.24"
20"	19.39"	19.24"
21"	20.39"	20.24"
22"	21.39"	21.24"
23"	22.39"	22.24"
24"	23.39"	23.24"
36"	35.39"	35.24"
48"	47.39"	47.24"
60"	59.39"	59.24"
72"	71.39"	71.24"
84"	83.39"	83.24"
96"	95.39"	95.24"



ESSENTIALS VEVE™-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Corner & Surface

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	



ESSENTIALS VEVE™-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Corner & Surface

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M 1.41" x .71"	HINGE - HMB-L 1.46" x 1.29"	HINGE - HMB-XL 1.46" x 4"	Q-PIVOT .75" x 1.03"	Q-ANGLE 1.38" x 2.23"	MMA-01 .75" x 1.23"	MMA-04 .93" x .19"
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	Magnet Mount Accessory of MG-01	Magnet Mount Accessory of MG-04

COMPATIBLE WIRING ACCESSORIES

Q-mini-J 1.25" x 2"	Q-mini-J5 2.27" x 2.80"	BARREL-EXT 8ft barrel cable extender	BARREL FOUR-FER Splits lead from one to four LED Barrel connector fixtures	CON120-EXT 10ft Con cable extender	CON FOUR-FER Splits lead from one to four LED Con connectors	CON M - BARREL F Male con to barrel cable adaptor
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	DRY ONLY	DRY/DMP/WET	DRY/DMP/WET	DRY/DMP/WET	DRY/DMP

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage