




# ESSENTIALS WIDE-FLAT (01) FOR TUNABLE APPLICATIONS

## 24VDC Linear Fixtures - Surface



- Wide, low-profile fixture for surface mount applications
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Mounting options include stainless steel or plastic clip
- Features painted end caps to match extrusion finish
- Side, back, and end feed wiring configurations available
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Used in applications where CCT and brightness need to be controlled separately
- When using DALI and DMX power supplies, LED wattage must be doubled

### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
				STD	

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL

Sample Part Number: WE1DW-2.5HE-20/30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E

<b>1</b> <b>PRODUCT</b>  <b>WE1DW</b> <b>WE1DW-USA</b>  Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  <b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE <b>4.0HE</b> 4.0W/ft HE  <b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE  <b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE	<b>3</b> <b>CCT</b>  <b>20/27</b> 2000K/2700K <b>20/30</b> 2000K/3000K <b>27/40</b> 2700K/4000K <b>27/55</b> 2700K/5500K  <b>24/30</b> 2400K/3000K <b>27/40</b> 2700K/4000K  <b>20/27</b> 2000K/2700K <b>20/30</b> 2000K/3000K <b>27/40</b> 2700K/4000K <b>27/55</b> 2700K/5500K	<b>4</b> <b>RATED</b>  <b>DRY</b> IP20  <b>DMP</b> IP54  <b>WET</b> IP67  Can be suitable for exterior use, contact factory for more information	<b>5</b> <b>EFFICIENCY</b>  <b>STD</b> Standard	<b>6</b> <b>LENS</b>  <b>DF</b> Diffused <b>PR</b> Polar <b>FR</b> Frosted <b>CL</b> Clear  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  <b>SINGLE (Input only)</b> <b>S1</b> End Feed <b>S2</b> Bottom Feed <b>S3</b> Left Side Feed <b>S4</b> Right Side Feed  For continuous mounting, consider bottom or side feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  <b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  <b>CLS</b> Closed End (No feed)	<b>10</b> <b>WIRE COLOR</b>  <b>WH</b> White <b>BK</b> Black		
<b>PASS THROUGH (Input/output)</b> <b>P1</b> End Feed <b>P2</b> Bottom Feed <b>P3</b> Left Side Feed <b>P4</b> Right Side Feed  For continuous mounting, consider bottom or side feed	<b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
<b>11</b> <b>WIRE TYPE</b>  <b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  <b>SST</b> Stainless Steel <b>PL</b> Plastic Clip	<b>13</b> <b>FINISH</b>  <b>ST</b> Satin <b>BK</b> Black <b>BZ</b> Bronze <b>CU</b> Custom  Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  <b>O</b> Optimal Illumination <b>E</b> Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# ESSENTIALS WIDE-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface

## 1 PRODUCT - DIMENSIONS

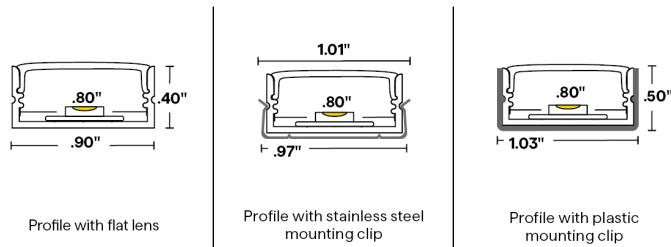

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with WE1DW-\*\*-30-DRY-STD

	1.5HE W/FT	2.5HE W/FT	4.0HE W/FT			
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	160	98	253	98	393	98
FR	155	98	245	98	381	98
PR	150	98	236	98	367	98
DF	136	98	214	98	334	98

## 6 DIODE VISIBILITY

DW-HE (ALL COOL)   DW-HE (50/50)   DW-HE (ALL WARM)

DF - Diffused lens

PR - Polar lens


FR - Frosted lens

CL - Clear lens

## 6 DIODE VISIBILITY

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

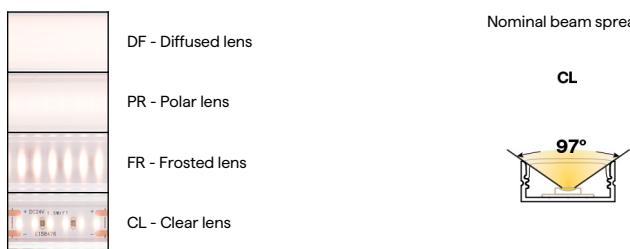

Clear 97°




# ESSENTIALS WIDE-FLAT (01) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface

## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)

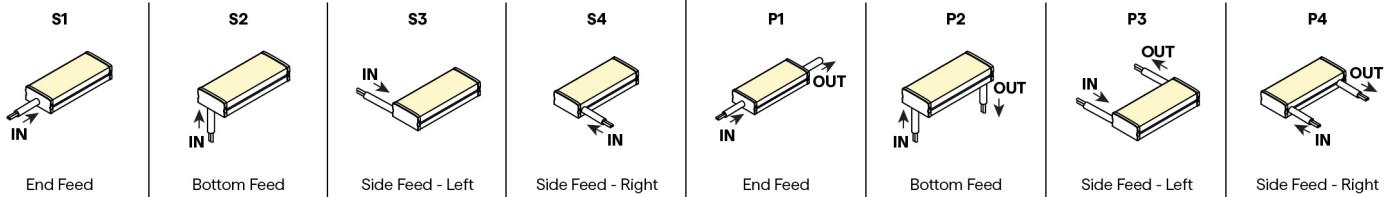


## CONFIGURATION OPTIONS

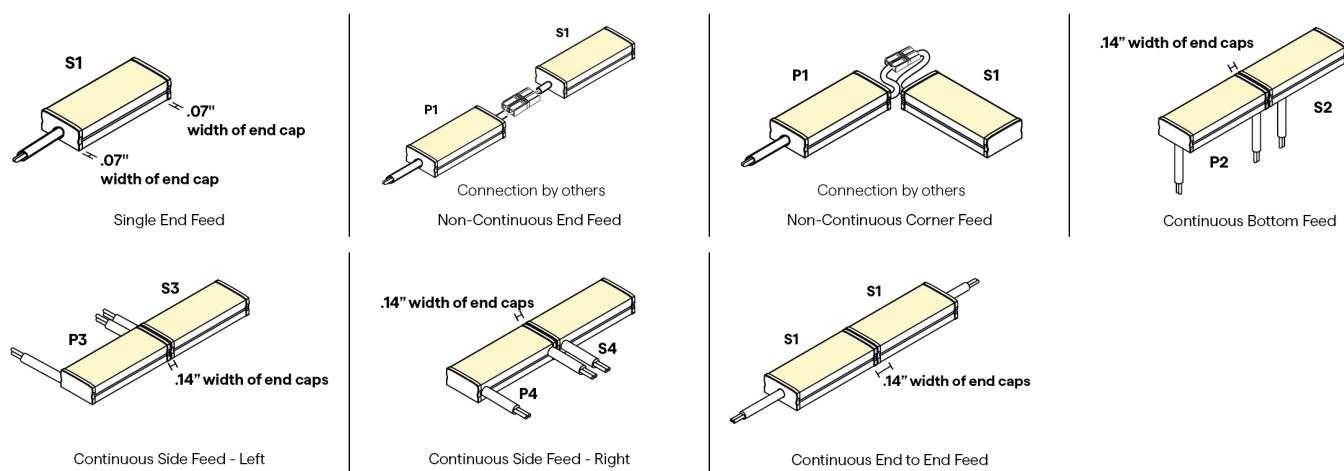

## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



## 10 WIRE COLOR








# ESSENTIALS WIDE-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface

## 12 MOUNTING

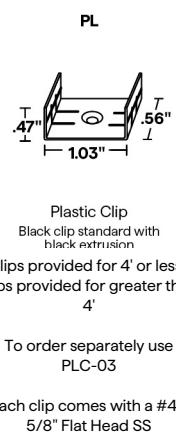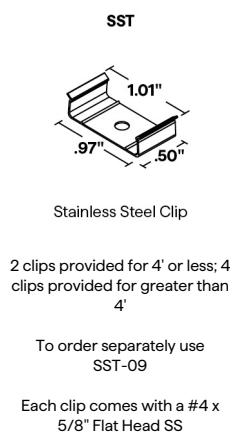


## 13 FINISH



Custom finishes require a longer lead time, consult factory

## 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

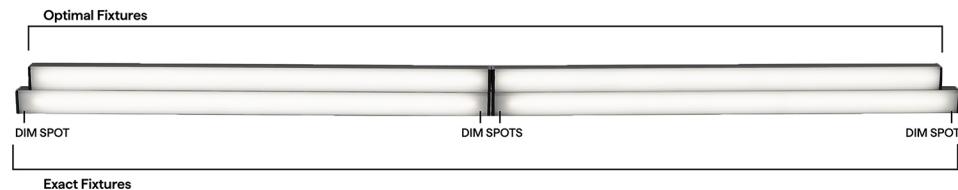

## DW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.51"	10.86"	10.41"	10.51"
13"	12.51"	12.86"	12.41"	12.51"
14"	12.51"	12.86"	12.41"	12.51"
15"	14.51"	14.86"	14.41"	14.51"
16"	14.51"	14.86"	14.41"	14.51"
17"	16.51"	16.86"	16.41"	16.51"
18"	16.51"	16.86"	16.41"	16.51"
19"	18.51"	18.86"	18.41"	18.51"
20"	18.51"	18.86"	18.41"	18.51"
21"	20.51"	20.86"	20.41"	20.51"
22"	20.51"	20.86"	20.41"	20.51"
23"	22.51"	22.86"	22.41"	22.51"
24"	22.51"	22.86"	22.41"	22.51"
36"	34.51"	34.86"	34.41"	34.51"
48"	46.51"	46.86"	46.41"	46.51"
60"	58.51"	58.86"	58.41"	58.51"
72"	70.51"	70.86"	70.41"	70.51"
84"	82.51"	82.86"	82.41"	82.51"
96"	94.51"	94.86"	94.41"	94.51"



# ESSENTIALS WIDE-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface

## DW-HE WET LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.66"	11.06"	10.56"	10.76"
13"	12.66"	11.06"	12.56"	12.76"
14"	12.66"	13.06"	12.56"	12.76"
15"	14.66"	13.06"	14.56"	14.76"
16"	14.66"	15.06"	14.56"	14.76"
17"	16.66"	15.06"	16.56"	16.76"
18"	16.66"	17.06"	16.56"	16.76"
19"	18.66"	17.06"	18.56"	18.76"
20"	18.66"	19.06"	18.56"	18.76"
21"	20.66"	19.06"	20.56"	20.76"
22"	20.66"	21.06"	20.56"	20.76"
23"	22.66"	21.06"	22.56"	22.76"
24"	22.66"	23.06"	22.56"	22.76"
36"	34.66"	35.06"	34.56"	34.76"
48"	46.66"	47.06"	46.56"	46.76"
60"	58.66"	59.06"	58.56"	58.76"
72"	70.66"	71.06"	70.56"	70.76"
84"	82.66"	83.06"	82.56"	82.76"
96"	94.66"	95.06"	94.56"	94.76"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has  $\pm 5\%$  tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	



# ESSENTIALS WIDE-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>  1.41" .71"	<b>HINGE - HMB-L</b>  1.46" 1.29" 1.46"	<b>HINGE - HMB-XL</b>  4" 1.46"	<b>Q-PIVOT</b>  .75" 1.03"	<b>Q-ANGLE</b>  2.23" 1.38"	<b>QUOVA-STANDARD</b> 
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	QUOVA Knife Edge