




ESSENTIALS WIDE-FLAT (01)

STATIC COLOR

24VDC Linear Fixtures - Surface



- Wide, low-profile fixture for surface mount applications
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Mounting options include stainless steel or plastic clip
- Features painted end caps to match extrusion finish
- Side, back, and end feed wiring configurations available
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Red, Green, Blue or Amber LEDs available
- Q-Tran Red & Amber LED products are Florida Fish and Wildlife Conservation Commission certified, making them safe for turtles and other wildlife

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/OPTIMAL
WE1SC	5.0			STD										

Sample Part Number: WE1SC-5.0-GR-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E


1 PRODUCT WE1SC See following pages for compatible power supplies.	2 WATTS/FT 5.0 5.0W/ft	3 CCT A Amber B Blue G Green R Red	4 RATED DRY IP20 DMP IP54 WET IP67	5 EFFICIENCY STD Standard	6 LENS DF Diffused PR Polar FR Frosted CL Clear
For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages					
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR WH White BK Black N/A For Barrel wet barrel only available in black		
P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed	BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"			
For continuous mounting, consider bottom or side feed					
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel PL Plastic Clip	13 FINISH ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



ESSENTIALS WIDE-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface

1 PRODUCT - DIMENSIONS

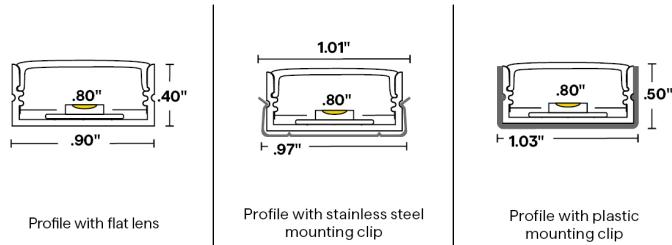


2 DELIVERED LUMENS

[Calculated L70 = 30000 hrs]
Tested with WE1SC-5.0--DRY-STD

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
CL	116	633	455	517	113	466	70	597
FR	113	633	442	517	110	466	68	597
PR	108	633	425	517	106	466	66	597
DF	98	633	386	517	96	466	60	597

6 DIODE VISIBILITY

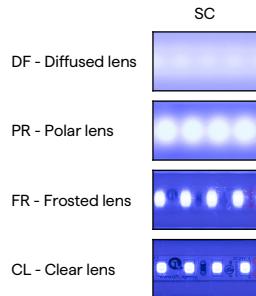

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

CL



Clear 97°




ESSENTIALS WIDE-FLAT (01) STATIC COLOR


24VDC Linear Fixtures - Surface

7 WIRE INPUT/OUTPUT

SINGLE (Input only)

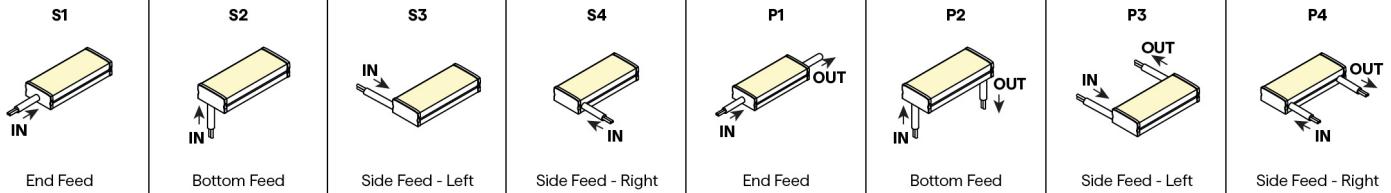


CONFIGURATION OPTIONS

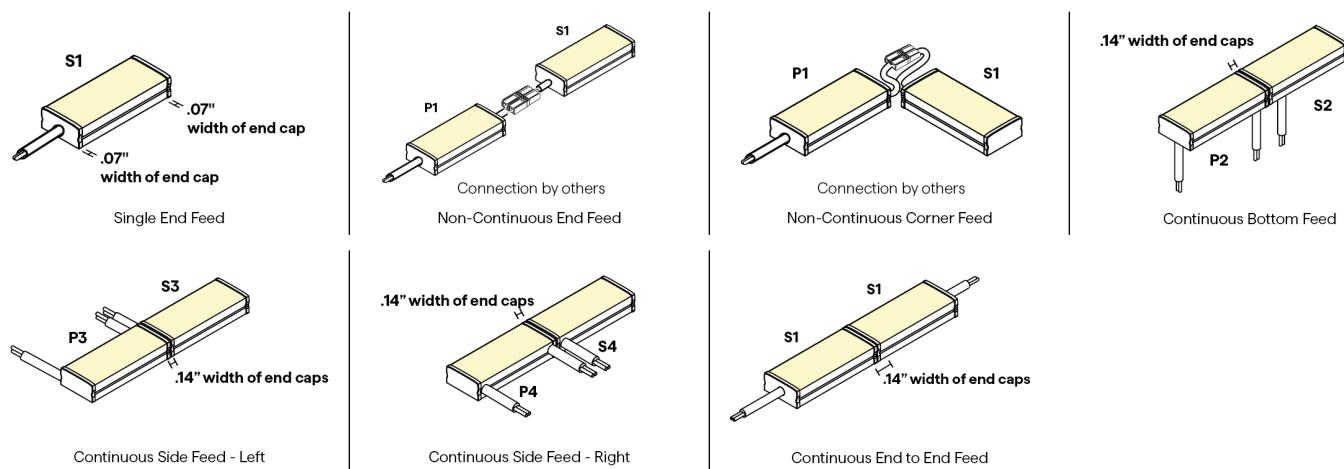

8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

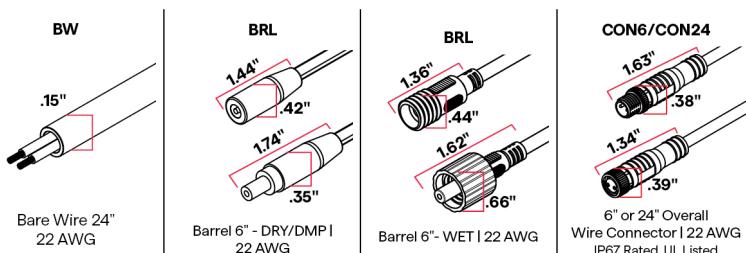

10 WIRE COLOR







ESSENTIALS WIDE-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface

12 MOUNTING

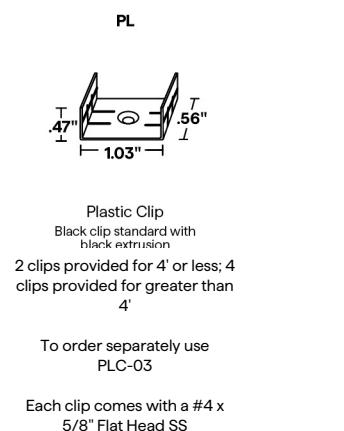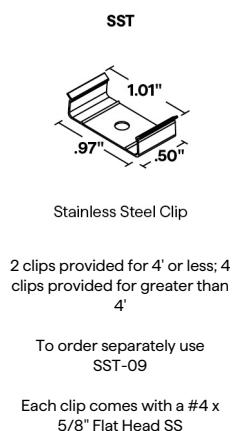

13 FINISH




Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

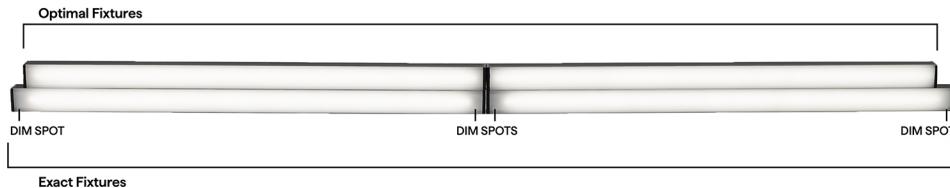

SC DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture S1 End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.41"		10.66"		10.26"		10.36"	
13"	12.41"		12.66"		12.26"		12.36"	
14"	12.41"		12.66"		12.26"		12.36"	
15"	14.41"		14.66"		14.26"		14.36"	
16"	14.41"		14.66"		14.26"		14.36"	
17"	16.41"		16.66"		16.26"		16.36"	
18"	16.41"		16.66"		16.26"		16.36"	
19"	18.41"		18.66"		18.26"		18.36"	
20"	18.41"		18.66"		18.26"		18.36"	
21"	20.41"		20.66"		20.26"		20.36"	
22"	20.41"		20.66"		20.26"		20.36"	
23"	22.41"		22.66"		22.26"		22.36"	
24"	22.41"		22.66"		22.26"		22.36"	
36"	34.41"		34.66"		34.26"		34.36"	
48"	46.41"		46.66"		46.26"		46.36"	
60"	58.41"		58.66"		58.26"		58.36"	
72"	70.41"		70.66"		70.26"		70.36"	
84"	82.41"		82.66"		82.26"		82.36"	
96"	94.41"		94.66"		94.26"		94.36"	



ESSENTIALS WIDE-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface

SC WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	10.61"		10.76"		10.51"		10.61"	
13"	12.61"		12.76"		12.51"		12.61"	
14"	12.61"		12.76"		12.51"		12.61"	
15"	14.61"		14.76"		14.51"		14.61"	
16"	14.61"		14.76"		14.51"		14.61"	
17"	16.61"		16.76"		16.51"		16.61"	
18"	16.61"		16.76"		16.51"		16.61"	
19"	18.61"		18.76"		18.51"		18.61"	
20"	18.61"		18.76"		18.51"		18.61"	
21"	20.61"		20.76"		20.51"		20.61"	
22"	20.61"		20.76"		20.51"		20.61"	
23"	22.61"		22.76"		22.51"		22.61"	
24"	22.61"		22.76"		22.51"		22.61"	
36"	34.61"		34.76"		34.51"		34.61"	
48"	46.61"		46.76"		46.51"		46.61"	
60"	58.61"		58.76"		58.51"		58.61"	
72"	70.61"		70.76"		70.51"		70.61"	
84"	82.61"		82.76"		82.51"		82.61"	
96"	94.61"		94.76"		94.51"		94.61"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SC	SC	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1			QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP			Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6			Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle			



ESSENTIALS WIDE-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE	QUOVA-STANDARD
1.41" .71"	1.46" 1.29"	1.46" 4" 1.46"	.75" 4" 1.03"	2.23" 1.38" 1.03"	QUOVA Knife Edge
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	

COMPATIBLE WIRING ACCESSORIES

Q-mini-J	Q-mini-J5	BARREL-EXT	BARREL FOUR-FER	CON120-EXT	CON FOUR-FER	CON M - BARREL F
2" 1.25"	2.80" 2.27"	8ft barrel cable extender DRY ONLY	Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	10ft Con cable extender DRY/DMP/WET	Splits lead from one to four LED Con connectors DRY/DMP/WET	Male con to barrel cable adaptor DRY/DMP



ESSENTIALS WIDE-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage