



ESSENTIALS TORQ- ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

white
optics




RoHS
COMPLIANT

5 YEAR
WARRANTY

Declare.

Red List
Approved



- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 EXTERNAL LOUVER	8 WIRE INPUT/ OUTPUT	9 CONNECTOR / WIRE IN	10 CONNECTOR / WIRE OUT	11 INPUT END CAP	12 OUTPUT END CAP	13 WIRE COLOR	14 WIRE TYPE	15 MOUNTING	16 FINISH	17 LENGTH (IN)	18 EXACT/ OPTIMAL
TQ3SW				ENC													

Sample Part Number: TQ3SW-5.0-30-ENC-WO-TL-P1-BW-BW-STD-STD-BK-CL2-SST-ST-48"-E

1 PRODUCT TQ3SW See following pages for compatible power supplies.	2 WATTS/FT 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE	3 CCT 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	4 RATED ENC IP67	5 EFFICIENCY STD Standard WO White Optics WhiteOptics - Internal coating, greater lumen output	6 LENS CL Clear TL Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	7 EXTERNAL LOUVER L1-WH White Plastic L1-BK Black Plastic N/A No Louver Louvers are shipped separately and require field assembly
8 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed For continuous mounting, consider bottom or side feed	9 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	10 CONNECTOR/WIRE OUT CLS Closed End (No feed)				
P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed For continuous mounting, consider bottom or side feed	PW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)				
11 INPUT END CAP STD Standard CL Clear STD - End cap matches fixture finish chosen Select CL for continuous runs	12 OUTPUT END CAP STD Standard CL Clear STD - End cap matches fixture finish chosen Select CL for continuous runs	13 WIRE COLOR WH White BK Black N/A For Barrel	14 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)			
15 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet	16 FINISH ST Satin BK Black BZ Bronze CU Custom	17 LENGTH (IN) Fixture length min 12", max 98.43" not including end caps. Tolerance +0 - 1/8". Consult factory for lengths under 12".	18 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.			


5 year warranty | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Compatible for use with QTL power supplies | Florida Fish and Wildlife Conservation Commission (FWC) rated Strips: Red and Amber | IK10 rated



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

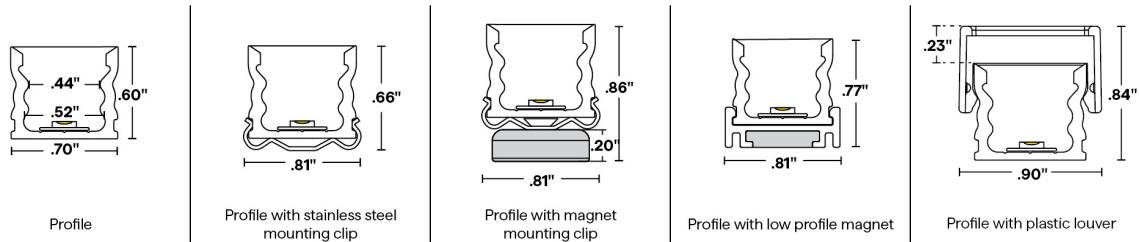

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]

Tested with TQ3SW-**-30-ENC-STD

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	92	98	128	98	161	98	234	98	200	98	244	98	443	98
TL	78	98	117	98	136	98	214	98	169	98	205	98	406	98

[Calculated L70 = 40000 hrs]

Tested with TQ3SW-**-30-ENC-WO

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	100	98	131	98	174	98	240	98	216	98	263	98	455	98
TL	88	98	119	98	153	98	218	98	190	98	232	98	412	98

TEMPERATURE RATINGS

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	125°F	-4°F	120°F	-4°F	110°F	-4°F	115°F

6 DIODE VISIBILITY



ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation




ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

7 EXTERNAL LOUVER

PLASTIC

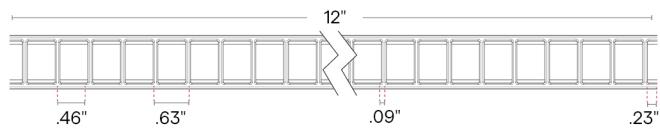


L1-XX




Lumen Multiplier

WH BK




8 WIRE INPUT/OUTPUT


SINGLE (Input only)




End Feed



Bottom Feed




Side Feed - Left




Side Feed - Right


PASS THROUGH (Input/Output)




End Feed



Bottom Feed



Side Feed - Left




Side Feed - Right



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS

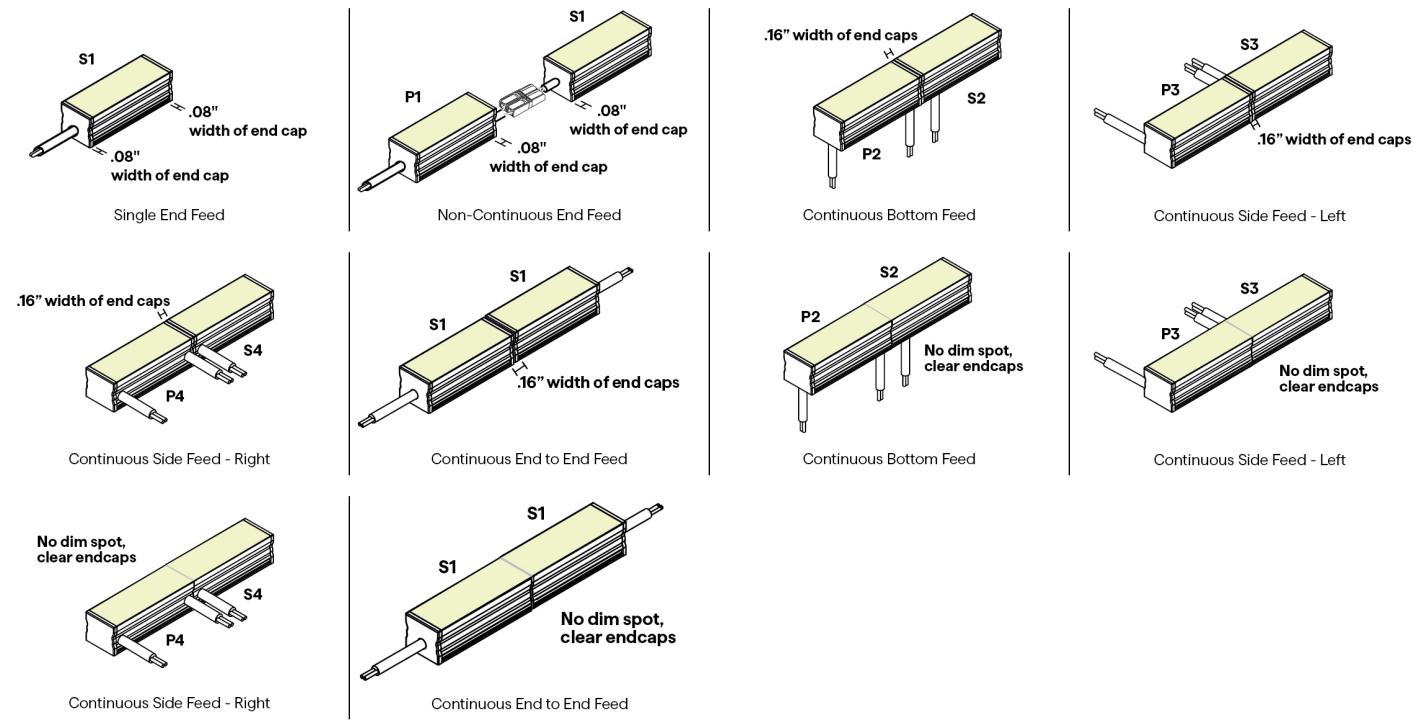


9 / 10 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

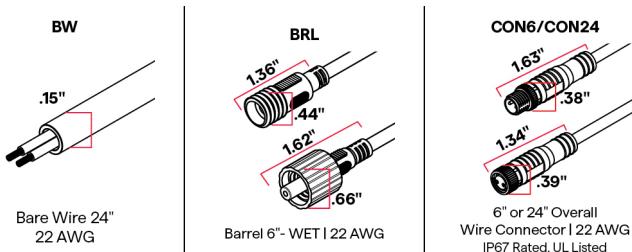

11 / 12 END CAP – IN/OUT

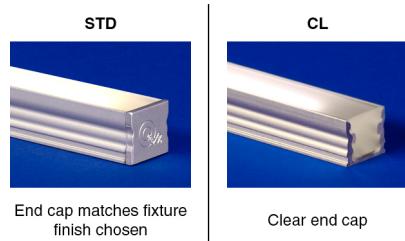




ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

13 WIRE COLOR



White
Black




Stainless Steel Clip

2 clips provided for 4' or less; 4
clips provided for greater than
4'

To order separately use SST-01


Each clip comes with a #4 x
5/8" Flat Head screw



Low Profile Magnet

One M4 provided per foot.

To order separately use
MG-04




Magnet Mount
Accessory for M4

Sold separately, to order use
MMA-04

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface



Magnet Clip

One MG provided per foot

To order separately use MG-01

16 FINISH



Satin
Black
Bronze

Custom color available

MMA-01



Magnet Mount
Accessory of MG-01

Sold separately, to order use
MMA-01

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface


18 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

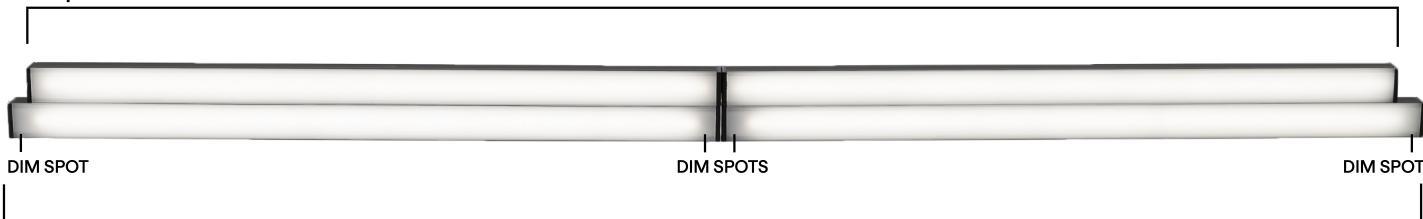

Exact Fixtures



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	11.41"		11.66"		11.26"		11.36"	
13"	12.41"		12.66"		12.26"		12.36"	
14"	13.41"		13.66"		13.26"		13.36"	
15"	14.41"		14.66"		14.26"		14.36"	
16"	15.41"		15.66"		15.26"		15.36"	
17"	16.41"		16.66"		16.26"		16.36"	
18"	17.41"		17.66"		17.26"		17.36"	
19"	18.41"		18.66"		18.26"		18.36"	
20"	19.41"		19.66"		19.26"		19.36"	
21"	20.41"		20.66"		20.26"		20.36"	
22"	21.41"		21.66"		21.26"		21.36"	
23"	22.41"		22.66"		22.26"		22.36"	
24"	23.41"		23.66"		23.26"		23.36"	
36"	35.41"		35.66"		35.26"		35.36"	
48"	47.41"		47.66"		47.26"		47.36"	
60"	59.41"		59.66"		59.26"		59.36"	
72"	71.41"		71.66"		71.26"		71.36"	
84"	83.41"		83.66"		83.26"		83.36"	
96"	95.41"		95.66"		95.26"		95.36"	

SW-HE ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.41"		10.66"		10.26"		10.36"	
13"	12.41"		12.66"		12.26"		12.36"	
14"	12.41"		12.66"		12.26"		12.36"	
15"	14.41"		14.66"		14.26"		14.36"	
16"	14.41"		14.66"		14.26"		14.36"	
17"	16.41"		16.66"		16.26"		16.36"	
18"	16.41"		16.66"		16.26"		16.36"	
19"	18.41"		18.66"		18.26"		18.36"	
20"	18.41"		18.66"		18.26"		18.36"	
21"	20.41"		20.66"		20.26"		20.36"	
22"	20.41"		20.66"		20.26"		20.36"	
23"	22.41"		22.66"		22.26"		22.36"	
24"	22.41"		22.66"		22.26"		22.36"	
36"	34.41"		34.66"		34.26"		34.36"	
48"	46.41"		46.66"		46.26"		46.36"	
60"	58.41"		58.66"		58.26"		58.36"	
72"	70.41"		70.66"		70.26"		70.36"	
84"	82.41"		82.66"		82.26"		82.36"	
96"	94.41"		94.66"		94.26"		94.36"	



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-DMX QZ-PH/0-10V
1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED(E) QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED(E) QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M 1.41" 1.71"	HINGE - HMB-L 1.46" 1.29"	HINGE - HMB-XL 1.46" 4"	Q-PIVOT 1.03" 1.75"	Q-ANGLE 1.38" 2.23"	NJ-MEDIUM 	NJ-LARGE 	SD-J-LARGE 	NU-LARGE 	BL-LARGE Backwards L Mounting Bracket
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	J Mounting Bracket	J Mounting Bracket	J Mounting Bracket	U Mounting Bracket	L Mounting Bracket
NL-LARGE 	SD-L-LARGE 								



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

 Q-mini-J 2" 1.25"	 Q-mini-J5 2.80" 2.27"	 BARREL-EXT	 BARREL FOUR-FER	 CON120-EXT	 CON FOUR-FER	 CON M - BARREL F
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	8ft barrel cable extender DRY ONLY	Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	10ft Con cable extender DRY/DMP/WET	Splits lead from one to four LED Con connectors DRY/DMP/WET	Male con to barrel cable adaptor DRY/DMP

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage