




# ESSENTIALS TALO- ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface



Declare.

- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include hidden stainless steel clip and plastic T-bar clips
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/FT	CCT	RATED	EFFICIENCY	LENS
TO3DW			ENC	STD	

## ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15	16	17
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	INPUT END CAP	OUTPUT END CAP	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
			STD	STD						

Sample Part Number: TO3DW-6.0-24/30-ENC-STD-TL-P1-BW-BW-STD-STD-BK-CL2-HSS-ST-48"-E

1	PRODUCT	2	WATTS/FT	3	CCT	4	RATED	5	EFFICIENCY	6	LENS
TO3DW	TO3DW-USA	1.5HE 2.5HE	1.5W/ft HE 2.5W/ft HE	24/30 27/40	2400K/3000K 2700K/4000K	ENC	IP67	STD	Standard	CL TL	Clear Translucent

Select USA option for BAA and BABA products.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

7	WIRE INPUT/OUTPUT	8	CONNECTOR/WIRE IN	9	CONNECTOR/WIRE OUT
<b>SINGLE (Input only)</b> S1 End Feed S2 Bottom Feed	For continuous mounting, consider bottom feed	<b>BW</b> <b>CON6</b> <b>CON24</b>	Bare Wire (Standard 24") Connector 6" Connector 24"	<b>CLS</b>	Closed End (No feed)
<b>PASS THROUGH (Input/output)</b> P1 End Feed P2 Bottom Feed	For continuous mounting, consider bottom feed	<b>BW</b> <b>CON6</b> <b>CON24</b>	Bare Wire (Standard 24") Connector 6" Connector 24"	<b>BW</b> <b>CON6</b> <b>CON24</b>	Bare Wire (Standard 24") Connector 6" Connector 24"

10	INPUT END CAP	11	OUTPUT END CAP	12	WIRE COLOR	13	WIRE TYPE
STD	Standard	STD	Standard	WH	White	CL2	Class 2

14	MOUNTING	15	FINISH	16	LENGTH (IN)	17	EXACT/OPTIMAL
HSS TBC-01 TBC-02	Hidden Stainless Steel Clip 9/16" Flat or Tegular TB-Grid 15/16" Flat or Tegular TB-Grid	ST BK CU	Satin Black Custom	Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".		O E	Optimal Illumination Exact Specified Length


5 year warranty | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Compatible for use with QTL power supplies | Florida Fish and Wildlife Conservation Commission (FWC) rated Strips: Red and Amber | IK10 rated



# ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

## 24VDC Linear Fixtures - Surface

### 1 PRODUCT - DIMENSIONS

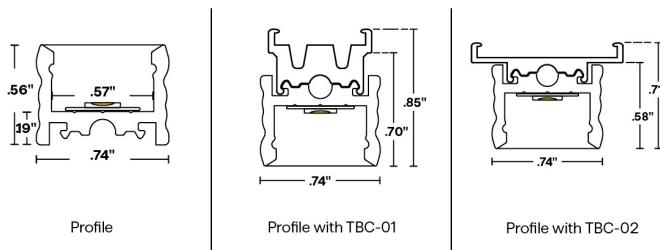


### 2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with TO3DW-\*\*-30-ENC-STD

	1.5HE W/FT	2.5HE W/FT		
LM/FT	CRI	LM/FT	CRI	
CL	110	98	174	98
TL	57	98	90	98

### 6 DIODE VISIBILITY

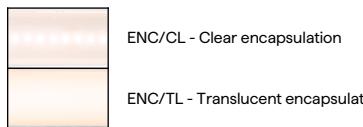


### TEMPERATURE RATINGS


	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT			
	QTL power supply other than DALI, DMX	DALI, DMX, or non-QTL power supply	QTL power supply other than DALI, DMX	DALI, DMX, or non-QTL power supply	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F	-4°F	105°F

### 7 WIRE INPUT/OUTPUT

#### SINGLE (Input only)

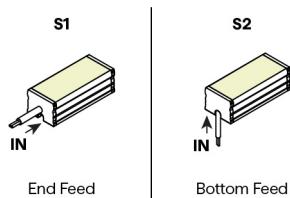

#### PASS THROUGH (Input/Output)

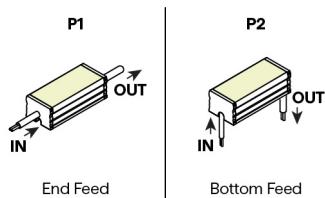




# ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS


## 24VDC Linear Fixtures - Surface

### CONFIGURATION OPTIONS

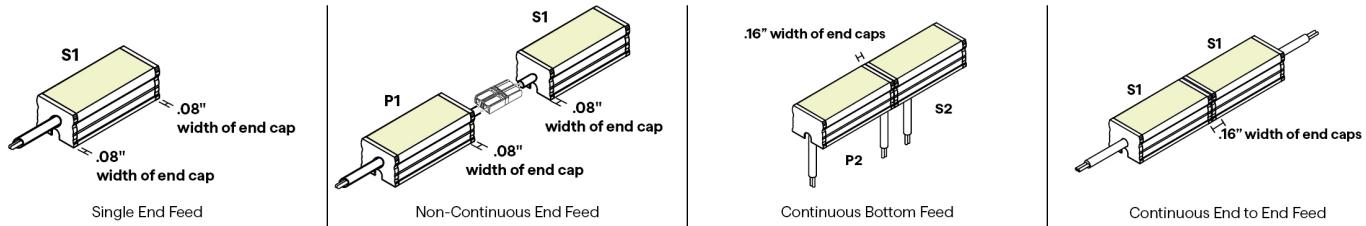

### 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

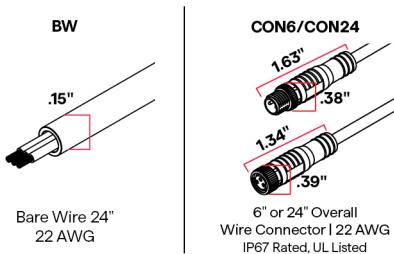

### 12 WIRE COLOR




White  
Black


### 14 MOUNTING



Hidden Stainless Steel Clip  
2 clips provided for 4' or less. 4 clips provided for greater than 4'.  
To order separately use SST-02  
Each clip comes with a #4 x 5/8 Flat Head SS



Plastic T-Bar Clip  
Use on 9/16" Flat or Tegular Drop Ceiling  
2 clips provided for first 12"; 1 clip provided for each additional 12" or less length  
To order separately use TBC-01  
Each pair of clips comes with M2.5 x 4mm set screw and Allen key



Plastic T-Bar Clip  
Use on 15/16" Flat or Tegular Drop Ceiling  
2 clips provided for first 12"; 1 clip provided for each additional 12" or less length  
To order separately use TBC-02  
Each pair of clips comes with M2.5 x 4mm set screw and Allen key

### 15 FINISH



Satin

Black

Custom finishes require a longer lead time, consult factory



# ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface


## 17 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

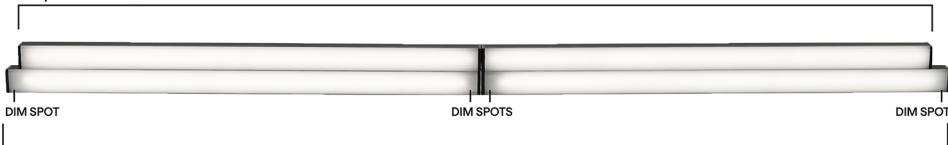

Exact Fixtures

### WD ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.41"		10.66"	
13"	12.41"		12.66"	
14"	12.41"		12.66"	
15"	14.41"		14.66"	
16"	14.41"		14.66"	
17"	16.41"		16.66"	
18"	16.41"		16.66"	
19"	18.41"		18.66"	
20"	18.41"		18.66"	
21"	20.41"		20.66"	
22"	20.41"		20.66"	
23"	22.41"		22.66"	
24"	22.41"		22.66"	
36"	34.41"		34.66"	
48"	46.41"		46.66"	
60"	58.41"		58.66"	
72"	70.41"		70.66"	
84"	82.41"		82.66"	
96"	94.41"		94.66"	



# ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface

## DW-HE ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $\pm 0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 IN End Feed	S2 IN Bottom Feed	P1 OUT End Feed	P2 OUT Bottom Feed
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has  $\pm 0 - 5\%$  tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle	



# ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS


## 24VDC Linear Fixtures - Surface

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
Phase	QZ-DW	Q-SET-QZ-DW QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+WD QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	
<b>DALI-2: DT6</b> LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
<b>DALI-2: DT8</b> LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES



## COMPATIBLE WIRING ACCESSORIES

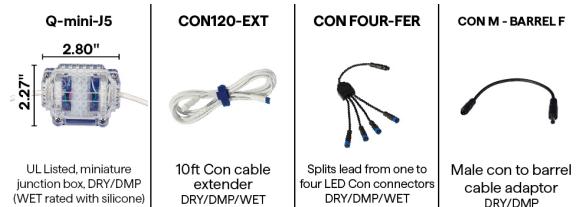

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE





# ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface

---

## COMPATIBLE APPS

### NFC APP



Read and write  
DMX addresses and  
adjust voltage