




ESSENTIALS TALO- ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface



- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include hidden stainless steel clip and plastic T-bar clips
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 INPUT END CAP	11 OUTPUT END CAP	12 WIRE COLOR	13 WIRE TYPE	14 MOUNTING	15 FINISH	16 LENGTH (IN)	17 EXACT/OPTIMAL
			ENC	STD					STD	STD						

Sample Part Number: **TO3DW-6.0-24/30-ENC-STD-TL-P1-BW-STD-STD-BK-CL2-HSS-ST-48"-E**


1 PRODUCT TO3DW TO3DW-USA Select USA option for BAA and BABA projects. LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	2 WATTS/FT 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	3 CCT 24/30 2400K/3000K 27/40 2700K/4000K	4 RATED ENC IP67	5 EFFICIENCY STD Standard	6 LENS CL Clear TL Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed	8 CONNECTOR/WIRE IN BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24"			
					For continuous mounting, consider bottom feed When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.
10 INPUT END CAP STD Standard STD - End cap matches fixture finish chosen	11 OUTPUT END CAP STD Standard STD - End cap matches fixture finish chosen	12 WIRE COLOR WH White BK Black	13 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)		
14 MOUNTING HSS Hidden Stainless Steel Clip TBC-01 9/16" Flat or Tegular TB-Grid TBC-02 15/16" Flat or Tegular TB-Grid	15 FINISH ST Satin BK Black CU Custom Custom finishes require a longer lead time, consult factory	16 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	17 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.		



ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface

1 PRODUCT - DIMENSIONS

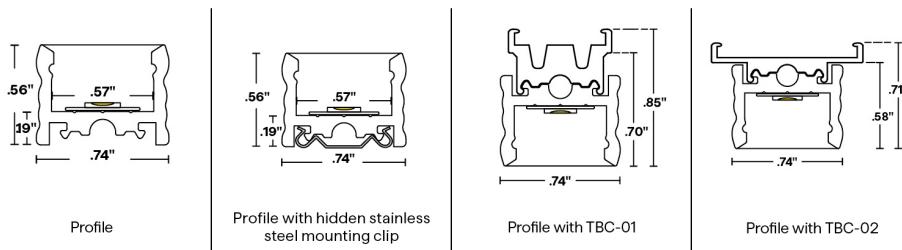


2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with TO3DW-**-30-ENC-STD

	1.5HE W/FT	2.5HE W/FT		
LM/FT	CRI	LM/FT	CRI	
CL	110	98	174	98
TL	57	98	90	98

6 DIODE VISIBILITY

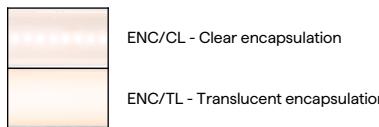


TEMPERATURE RATINGS


Ambient Operating Temp - Surface	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max	Min	Max	Min	Max
	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F

7 WIRE INPUT/OUTPUT

SINGLE (Input only)



PASS THROUGH (Input/Output)






ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface

CONFIGURATION OPTIONS

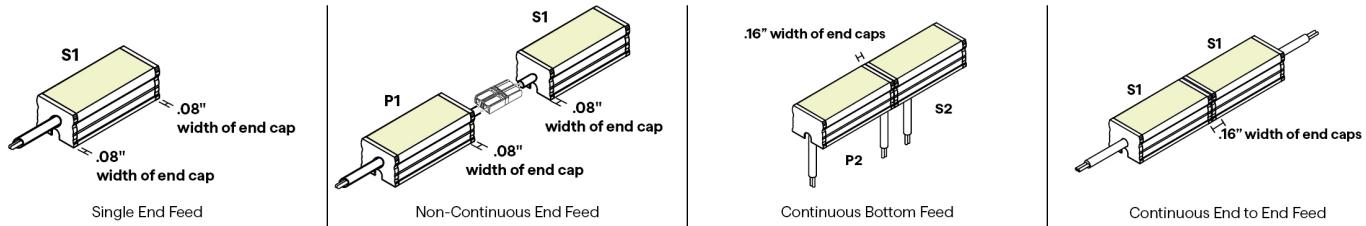

8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

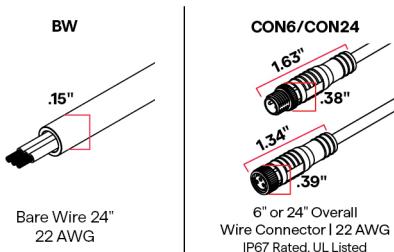

12 WIRE COLOR



White
Black

14 MOUNTING




Hidden Stainless Steel Clip

2 clips provided for 4' or less. 4 clips provided for greater than 4'.

To order separately use SST-02

Each clip comes with a #4 x 5/8 Flat Head SS




Plastic T-Bar Clip

Use on 9/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-01

Each pair of clips comes with M2.5 x 4mm set screw and Allen key



Plastic T-Bar Clip

Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-02

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

15 FINISH



Satin

Black

Custom finishes require a longer lead time, consult factory



ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface

17 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

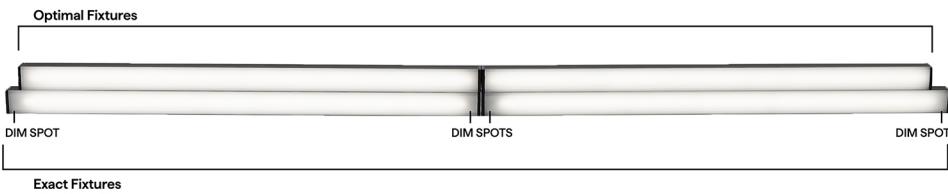

DW-HE ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	End Feed	Bottom Feed	End Feed	Bottom Feed
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	



ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
Phase	QZ-DW	Q-SET-QZ-DW QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+WD QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	

COMPATIBLE MOUNTING ACCESSORIES



HINGE - HMB-M 1.41" .71"	HINGE - HMB-L 1.46" 1.29"	HINGE - HMB-XL 1.46" 4"	Q-PIVOT .75" 1.03"	Q-ANGLE 2.23" 1.38"
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory



ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5  2.80" x 2.27"	CON120-EXT  10ft Con cable extender	CON FOUR-FER  Splits lead from one to four LED Con connectors	CON M - BARREL F  Male con to barrel cable adaptor
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)			DRY/DMP/WET

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage