



ESSENTIALS TORQ- ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

white
optics




RoHS
COMPLIANT

5 YEAR
WARRANTY

Declare.

Red List
Approved



- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Optional plastic louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

| 1 PRODUCT | 2 WATTS/ FT | 3 CCT | 4 RATED | 5 EFFICIENCY | 6 LENS |
|--------------|----------------|----------|------------|-----------------|-----------|
| TQ3SW | | | ENC | | |

ADDITIONAL INFORMATION REQUIRED TO ORDER

| 7 WIRE INPUT/OUTPUT | 8 CONNECTOR / WIRE IN | 9 CONNECTOR / WIRE OUT | 10 INPUT END CAP | 11 OUTPUT END CAP | 12 WIRE COLOR | 13 WIRE TYPE | 14 MOUNTING | 15 FINISH | 16 LENGTH (IN) | 17 EXACT/ OPTIMAL |
|------------------------|--------------------------|---------------------------|---------------------|----------------------|------------------|-----------------|----------------|--------------|-------------------|----------------------|
| | | | | | | | | | | |

Sample Part Number: TQ3SW-5.0-30-ENC-WO-TL-P1-BW-BW-STD-STD-BK-CL2-SST-ST-48"-E

| | | | | | |
|--|---|---|---|---|---|
| 1 PRODUCT TQ3SW See following pages for compatible power supplies. | 2 WATTS/FT 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE | 3 CCT 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K | 4 RATED ENC IP67 | 5 EFFICIENCY STD Standard White Optics WO WhiteOptics - Internal coating, greater lumen output | 6 LENS CL Clear TL Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages |
| 7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed For continuous mounting, consider bottom or side feed | 8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48) | 9 CONNECTOR/WIRE OUT CLS Closed End (No feed) | | | |
| 10 INPUT END CAP STD Standard CL Clear STD - End cap matches fixture finish chosen Select CL for continuous runs | 11 OUTPUT END CAP STD Standard CL Clear STD - End cap matches fixture finish chosen Select CL for continuous runs | 12 WIRE COLOR WH White BK Black N/A For Barrel | 13 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW) | | |
| 14 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet | 15 FINISH ST Satin BK Black BZ Bronze CU Custom | 16 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12". | 17 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts. | | |


5 year warranty | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Compatible for use with QTL power supplies | Florida Fish and Wildlife Conservation Commission (FWC) rated Strips: Red and Amber | IK10 rated



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

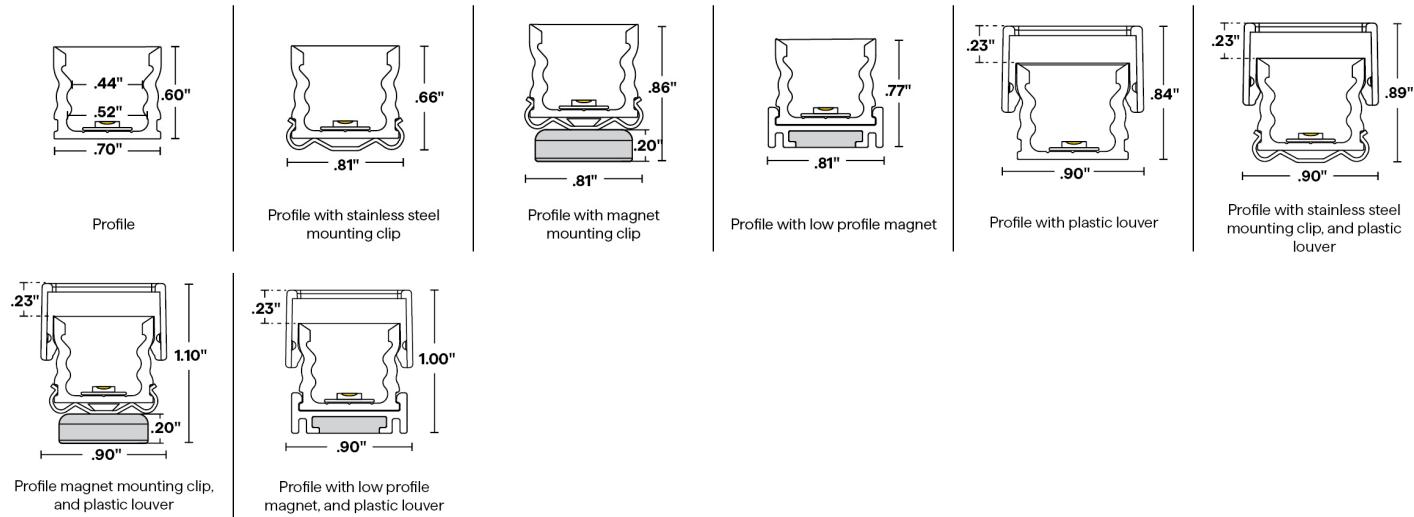

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with TQ3SW-**-30-ENC-STD

| | 1.5 W/FT | 1.5HE W/FT | 3.0 W/FT | 3.0HE W/FT | 4.0 W/FT | 5.0 W/FT | 6.0HE W/FT | | | | | | | |
|----|----------|------------|----------|------------|----------|----------|------------|-----|-------|-----|-------|-----|-----|----|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | | |
| CL | 92 | 98 | 128 | 98 | 161 | 98 | 234 | 98 | 200 | 98 | 244 | 98 | 443 | 98 |
| TL | 78 | 98 | 117 | 98 | 136 | 98 | 214 | 98 | 169 | 98 | 205 | 98 | 406 | 98 |

[Calculated L70 = 40000 hrs]
Tested with TQ3SW-**-30-ENC-WO

| | 1.5 W/FT | 1.5HE W/FT | 3.0 W/FT | 3.0HE W/FT | 4.0 W/FT | 5.0 W/FT | 6.0HE W/FT | | | | | | | |
|----|----------|------------|----------|------------|----------|----------|------------|-----|-------|-----|-------|-----|-----|----|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | | |
| CL | 100 | 98 | 131 | 98 | 174 | 98 | 240 | 98 | 216 | 98 | 263 | 98 | 455 | 98 |
| TL | 88 | 98 | 119 | 98 | 153 | 98 | 218 | 98 | 190 | 98 | 232 | 98 | 412 | 98 |

TEMPERATURE RATINGS

| | 1.5 W/FT | | 1.5 HE W/FT | | 3.0 W/FT | | 3.0 HE W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0 HE W/FT | |
|----------------------------------|----------|-------|-------------|-------|----------|-------|-------------|-------|----------|-------|----------|-------|-------------|-------|
| | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| Ambient Operating Temp - Surface | -4°F | 130°F | -4°F | 135°F | -4°F | 125°F | -4°F | 125°F | -4°F | 120°F | -4°F | 110°F | -4°F | 115°F |



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

6 DIODE VISIBILITY




ENC/CL - Clear encapsulation


ENC/TL - Translucent encapsulation

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

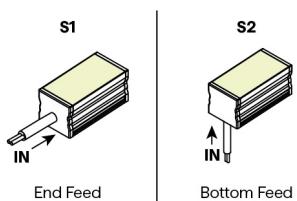

End Feed

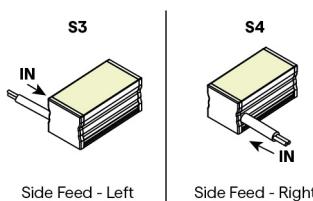


Side Feed - Left




Side Feed - Right


PASS THROUGH (Input/Output)

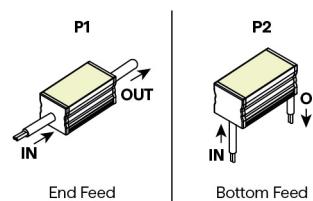


End Feed



Bottom Feed

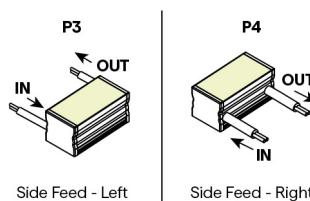


Side Feed - Left




Side Feed - Right


CONFIGURATION OPTIONS

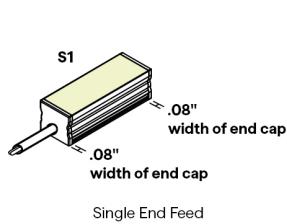


Single End Feed

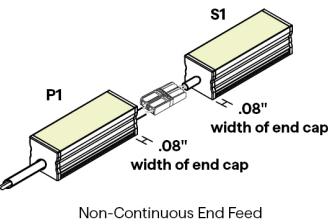


Non-Continuous End Feed




Continuous Bottom Feed

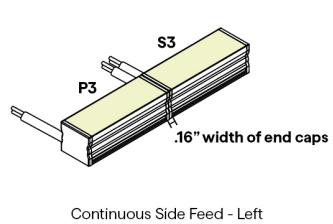


Continuous Side Feed - Left

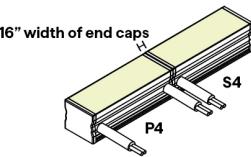


Continuous Side Feed - Right

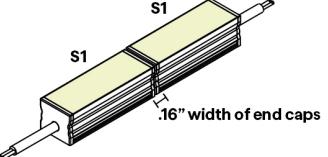

Continuous End to End Feed




Continuous Bottom Feed

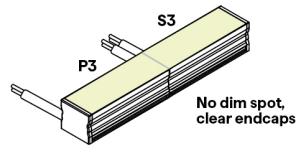


No dim spot,
clear endcaps

Continuous Side Feed - Left

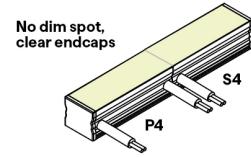

Continuous Side Feed - Right

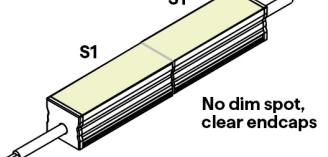

No dim spot,
clear endcaps

Continuous End to End Feed




ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out


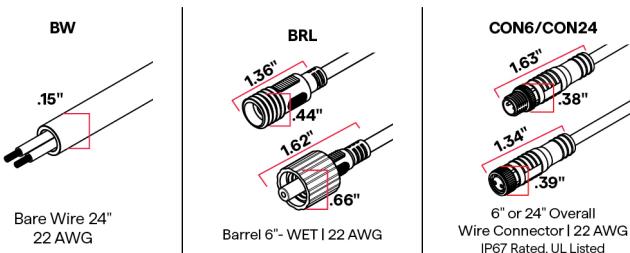


10 / 11 END CAP – IN/OUT

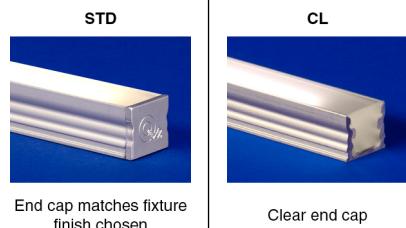

EXTERNAL LOUVER ACCESSORY

PLASTIC

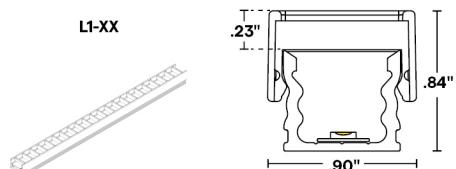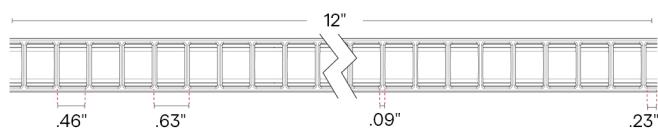

Lumen Multiplier
WH BK
0.70 0.49

Profile with plastic louver

To order separately use
TORQ-L1-FLAT-KIT-WH or
TORQ-L1-FLAT-KIT-BK




ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

12 WIRE COLOR



White
Black




Stainless Steel Clip

2 clips provided for 4' or less; 4
clips provided for greater than
4'

To order separately use SST-01


Each clip comes with a #4 x
5/8" Flat Head screw



Low Profile Magnet

One M4 provided per foot.

To order separately use
MG-04




Magnet Mount
Accessory for M4

Sold separately, to order use
MMA-04

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface



Magnet Clip

One MG provided per foot

To order separately use MG-01

15 FINISH



Satin
Black
Bronze

Custom color available

MMA-01



Magnet Mount
Accessory of MG-01

Sold separately, to order use
MMA-01

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface


17 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

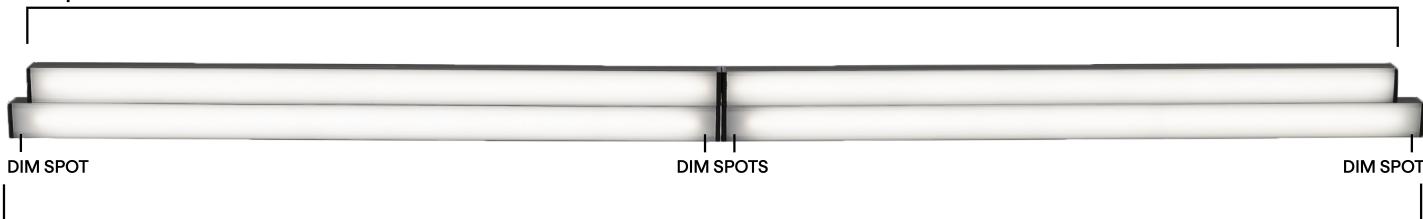

Exact Fixtures



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

| Requested Length | Potential dim spot on either end of fixture |
|------------------|---|
| 12" | .5" |
| 13" | .5" |
| 14" | .5" |
| 15" | .5" |
| 16" | .5" |
| 17" | .5" |
| 18" | .5" |
| 19" | .5" |
| 20" | .5" |
| 21" | .5" |
| 22" | .5" |
| 23" | .5" |
| 24" | .5" |
| 36" | .5" |
| 48" | .5" |
| 60" | .5" |
| 72" | .5" |
| 84" | .5" |
| 96" | .5" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2 | | P1 & P2 | | S3 & S4 | | P3 & P4 | |
|--------------------------|----------------|-------------------|----------------|-------------------|------------------------|-------------------------|------------------------|-------------------------|
| | S1 End Feed | S2 Bottom Feed | P1 End Feed | P2 Bottom Feed | S3 Side Feed - Left | S4 Side Feed - Right | P3 Side Feed - Left | P4 Side Feed - Right |
| 12" | 11.41" | | 11.66" | | 11.26" | | 11.36" | |
| 13" | 12.41" | | 12.66" | | 12.26" | | 12.36" | |
| 14" | 13.41" | | 13.66" | | 13.26" | | 13.36" | |
| 15" | 14.41" | | 14.66" | | 14.26" | | 14.36" | |
| 16" | 15.41" | | 15.66" | | 15.26" | | 15.36" | |
| 17" | 16.41" | | 16.66" | | 16.26" | | 16.36" | |
| 18" | 17.41" | | 17.66" | | 17.26" | | 17.36" | |
| 19" | 18.41" | | 18.66" | | 18.26" | | 18.36" | |
| 20" | 19.41" | | 19.66" | | 19.26" | | 19.36" | |
| 21" | 20.41" | | 20.66" | | 20.26" | | 20.36" | |
| 22" | 21.41" | | 21.66" | | 21.26" | | 21.36" | |
| 23" | 22.41" | | 22.66" | | 22.26" | | 22.36" | |
| 24" | 23.41" | | 23.66" | | 23.26" | | 23.36" | |
| 36" | 35.41" | | 35.66" | | 35.26" | | 35.36" | |
| 48" | 47.41" | | 47.66" | | 47.26" | | 47.36" | |
| 60" | 59.41" | | 59.66" | | 59.26" | | 59.36" | |
| 72" | 71.41" | | 71.66" | | 71.26" | | 71.36" | |
| 84" | 83.41" | | 83.66" | | 83.26" | | 83.36" | |
| 96" | 95.41" | | 95.66" | | 95.26" | | 95.36" | |

SW-HE ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

| Requested Length | Potential dim spot on either end of fixture |
|------------------|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

| Requested Nominal Length | S1 & S2 | | P1 & P2 | | S3 & S4 | | P3 & P4 | |
|--------------------------|----------------|-------------------|----------------|-------------------|------------------------|-------------------------|------------------------|-------------------------|
| | S1 End Feed | S2 Bottom Feed | P1 End Feed | P2 Bottom Feed | S3 Side Feed - Left | S4 Side Feed - Right | P3 Side Feed - Left | P4 Side Feed - Right |
| 12" | 10.41" | | 10.66" | | 10.26" | | 10.36" | |
| 13" | 12.41" | | 12.66" | | 12.26" | | 12.36" | |
| 14" | 12.41" | | 12.66" | | 12.26" | | 12.36" | |
| 15" | 14.41" | | 14.66" | | 14.26" | | 14.36" | |
| 16" | 14.41" | | 14.66" | | 14.26" | | 14.36" | |
| 17" | 16.41" | | 16.66" | | 16.26" | | 16.36" | |
| 18" | 16.41" | | 16.66" | | 16.26" | | 16.36" | |
| 19" | 18.41" | | 18.66" | | 18.26" | | 18.36" | |
| 20" | 18.41" | | 18.66" | | 18.26" | | 18.36" | |
| 21" | 20.41" | | 20.66" | | 20.26" | | 20.36" | |
| 22" | 20.41" | | 20.66" | | 20.26" | | 20.36" | |
| 23" | 22.41" | | 22.66" | | 22.26" | | 22.36" | |
| 24" | 22.41" | | 22.66" | | 22.26" | | 22.36" | |
| 36" | 34.41" | | 34.66" | | 34.26" | | 34.36" | |
| 48" | 46.41" | | 46.66" | | 46.26" | | 46.36" | |
| 60" | 58.41" | | 58.66" | | 58.26" | | 58.36" | |
| 72" | 70.41" | | 70.66" | | 70.26" | | 70.36" | |
| 84" | 82.41" | | 82.66" | | 82.26" | | 82.36" | |
| 96" | 94.41" | | 94.66" | | 94.26" | | 94.36" | |



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | | OUTDOOR | |
|---------------------|--|--|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Dim to Black | Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1 | Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1 | QOM-DC+CAP QOM-PH | QOM-DC+CAP QOM-PH |
| 0.1% | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V | Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V |
| 1% | QTM-eLED(E) QZ-DALI-DT6 | QTM-eLED(E) QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | Q-HEX-mini-DC Q-SET-mLED | |



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

| DIMMING PROTOCOL | INDOOR | | OUTDOOR | |
|------------------|--|--|---|--|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Non-Dim | QT-CAB-eLED-ND QTM-eLED-ND QZ-ND | QT-CAB-eLED-ND QTM-eLED-ND QZ-ND | Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65 | Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65 |
| Phase | Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1 | Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1 | Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V | Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V |
| 0-10V | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V | Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V |
| Lutron Athena | QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN | QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN | | |
| ECO System | QTM-eLED(E) | QTM-eLED(E) | | |
| DMX | QZ-DMX | QZ-DMX | Q-SET-QZ-DMX QZ-DMX | Q-SET-QZ-DMX QZ-DMX |
| DALI-2: DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 | Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 |
| SCENE App Dimmed | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | | |

COMPATIBLE MOUNTING ACCESSORIES

| | | | | | | | | | |
|--------------------------------------|-------------------------------------|--------------------------------------|--------------------------|------------------------------------|----------------------|---------------------|-----------------------|---------------------|---|
| HINGE - HMB-M 1.41" 1.71" | HINGE - HMB-L 1.46" 1.29" | HINGE - HMB-XL 1.46" 4" | Q-PIVOT 1.03" | Q-ANGLE 1.38" 2.23" .75" | NJ-MEDIUM | NJ-LARGE | SD-J-LARGE | NU-LARGE | BL-LARGE Backwards L Mounting Bracket |
| Adjustable mounting bracket - Medium | Adjustable mounting bracket - Large | Adjustable mounting bracket - XLarge | Small mounting accessory | Adjustable mounting accessory | J Mounting Bracket | J Mounting Bracket | J Mounting Bracket | U Mounting Bracket | L Mounting Bracket |
| NL-LARGE | SD-L-LARGE | | | | | | | | |



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

| | | | | | | |
|--|--|---|--|---|---|--|
|  Q-mini-J 2" 1.25" |  Q-mini-J5 2.80" 2.27" |  BARREL-EXT |  BARREL FOUR-FER |  CON120-EXT |  CON FOUR-FER |  CON M - BARREL F |
| UL Listed, miniature junction box, DRY/DMP (WET rated with silicone) | UL Listed, miniature junction box, DRY/DMP (WET rated with silicone) | 8ft barrel cable extender DRY ONLY | Splits lead from one to four LED Barrel connector fixtures, DRY/DMP | 10ft Con cable extender DRY/DMP/WET | Splits lead from one to four LED Con connectors DRY/DMP/WET | Male con to barrel cable adaptor DRY/DMP |

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage