





ESSENTIALS TORQ- ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed



- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Optional plastic louver accessory available in white or black for added glare control



INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/FT	CCT	RATED	EFFICIENCY	LENS
			ENC		

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15	16	17
WIRE INPUT/ OUTPUT	CONNECTOR / WIRE IN	CONNECTOR / WIRE OUT	INPUT END CAP	OUTPUT END CAP	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **TQ3SW-5.0-30-ENC-WO-TL-P1-BW-BW-STD-STD-BK-CL2-SST-ST-48\"-E**

1	2	3	4	5	6
PRODUCT	WATTS/FT	CCT	RATED	EFFICIENCY	LENS
TQ3SW TQ3SW-USA Select USA option for BAA and BABA projects. See following pages for compatible power supplies.	1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	ENC IP67	STD Standard WO White Optics WhiteOptics - Internal coating, greater lumen output	CL Clear TL Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages For optional snap-on louver ordering, see External Louver Accessory section on following pages

7	8	9
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT
SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed For continuous mounting, consider bottom or side feed PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed P3 Left Side Feed P4 Right Side Feed For continuous mounting, consider bottom or side feed	BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	CLS Closed End (No feed) BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10	11	12	13
INPUT END CAP	OUTPUT END CAP	WIRE COLOR	WIRE TYPE
STD Standard CL Clear STD - End cap matches fixture finish chosen Select CL for continuous runs	STD Standard CL Clear STD - End cap matches fixture finish chosen Select CL for continuous runs	WH White BK Black N/A For Barrel	CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)

14	15	16	17
MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
SST Stainless Steel M4 Low Profile Magnet MG Magnet	ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.


5 year warranty | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Compatible for use with QTL power supplies | Florida Fish and Wildlife Conservation Commission (FWC) rated Strips: Red and Amber | IK10 rated



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

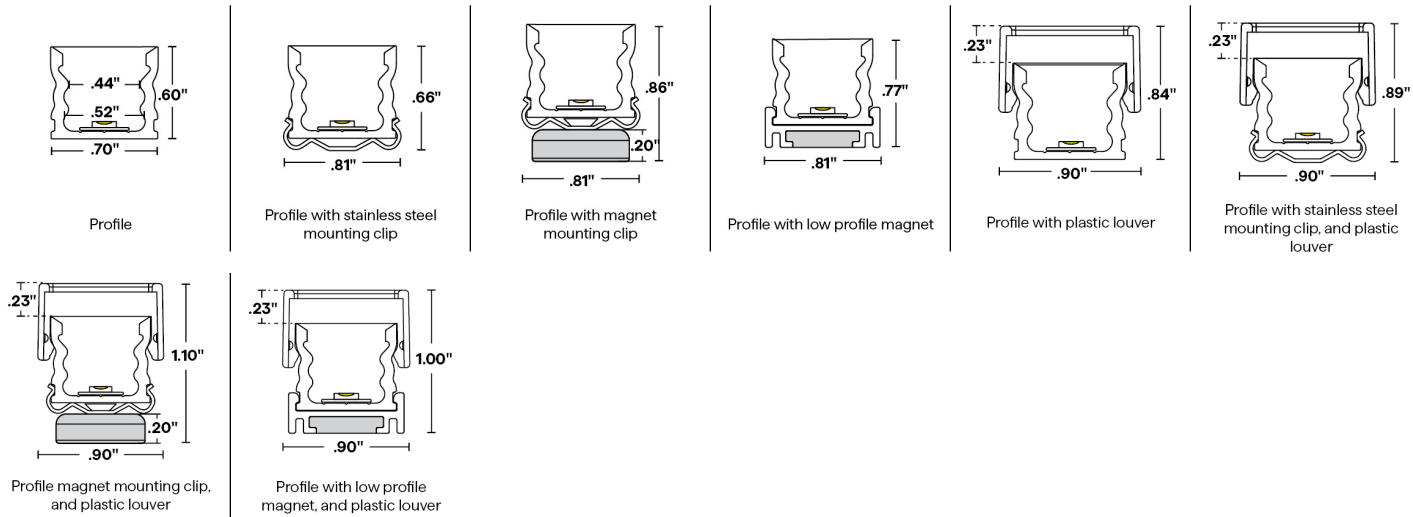

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with TQ3SW-**-30-ENC-STD

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	92	98	128	98	161	98	234	98	200	98	244	98	443	98
TL	78	98	117	98	136	98	214	98	169	98	205	98	406	98

[Calculated L70 = 40000 hrs]
Tested with TQ3SW-**-30-ENC-WO

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	100	98	131	98	174	98	240	98	216	98	263	98	455	98
TL	88	98	119	98	153	98	218	98	190	98	232	98	412	98

TEMPERATURE RATINGS

	1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	125°F	-4°F	120°F	-4°F	110°F	-4°F	115°F



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

6 DIODE VISIBILITY




ENC/CL - Clear encapsulation


ENC/TL - Translucent encapsulation

7 WIRE INPUT/OUTPUT


SINGLE (Input only)




End Feed



Bottom Feed




Side Feed - Left




Side Feed - Right


PASS THROUGH (Input/Output)




End Feed



Bottom Feed




Side Feed - Left




Side Feed - Right


CONFIGURATION OPTIONS




Single End Feed




Non-Continuous End Feed




Continuous Bottom Feed




Continuous Side Feed - Left




Continuous Side Feed - Right




Continuous End to End Feed




Continuous Bottom Feed



Continuous Side Feed - Left



Continuous Side Feed - Right



Continuous End to End Feed




ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



Bare Wire 24" 22 AWG




Barrel 6"- WET | 22 AWG




6" or 24" Overall Wire Connector | 22 AWG IP67 Rated, UL Listed

10 / 11 END CAP – IN/OUT





End cap matches fixture finish chosen



Clear end cap

EXTERNAL LOUVER ACCESSORY


PLASTIC

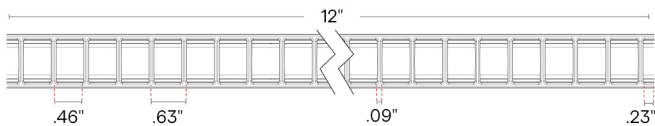

Lumen Multiplier

WH BK

0.70 0.49



Profile with plastic louver

To order separately use TORQ-L1-FLAT-KIT-WH or TORQ-L1-FLAT-KIT-BK



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

12 WIRE COLOR



14 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head screw

M4




Low Profile Magnet

One M4 provided per foot

To order separately use MG-04

MMA-04




Magnet Mount Accessory for M4

Sold separately, to order use MMA-04

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

MG




Magnet Clip

One MG provided per foot


To order separately use MG-01

15 FINISH



Custom finishes require a longer lead time, consult factory

MMA-01



Magnet Mount Accessory of MG-01

Sold separately, to order use MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS


Required when mounting to a non-magnetic surface

17 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

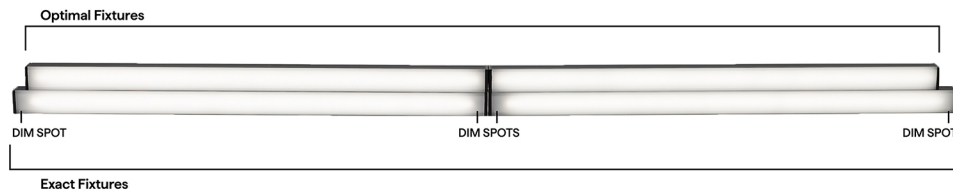



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed









SW ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  S2 	P1 & P2  P2 	S3 & S4  S4 	P3 & P4  P4 
12"	11.41"	11.66"	11.26"	11.36"
13"	12.41"	12.66"	12.26"	12.36"
14"	13.41"	13.66"	13.26"	13.36"
15"	14.41"	14.66"	14.26"	14.36"
16"	15.41"	15.66"	15.26"	15.36"
17"	16.41"	16.66"	16.26"	16.36"
18"	17.41"	17.66"	17.26"	17.36"
19"	18.41"	18.66"	18.26"	18.36"
20"	19.41"	19.66"	19.26"	19.36"
21"	20.41"	20.66"	20.26"	20.36"
22"	21.41"	21.66"	21.26"	21.36"
23"	22.41"	22.66"	22.26"	22.36"
24"	23.41"	23.66"	23.26"	23.36"
36"	35.41"	35.66"	35.26"	35.36"
48"	47.41"	47.66"	47.26"	47.36"
60"	59.41"	59.66"	59.26"	59.36"
72"	71.41"	71.66"	71.26"	71.36"
84"	83.41"	83.66"	83.26"	83.36"
96"	95.41"	95.66"	95.26"	95.36"









SW-HE ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2  S2 	P1 & P2  P2 	S3 & S4  S4 	P3 & P4  P4 
12"	10.41"	10.66"	10.26"	10.36"
13"	12.41"	12.66"	12.26"	12.36"
14"	12.41"	12.66"	12.26"	12.36"
15"	14.41"	14.66"	14.26"	14.36"
16"	14.41"	14.66"	14.26"	14.36"
17"	16.41"	16.66"	16.26"	16.36"
18"	16.41"	16.66"	16.26"	16.36"
19"	18.41"	18.66"	18.26"	18.36"
20"	18.41"	18.66"	18.26"	18.36"
21"	20.41"	20.66"	20.26"	20.36"
22"	20.41"	20.66"	20.26"	20.36"
23"	22.41"	22.66"	22.26"	22.36"
24"	22.41"	22.66"	22.26"	22.36"
36"	34.41"	34.66"	34.26"	34.36"
48"	46.41"	46.66"	46.26"	46.36"
60"	58.41"	58.66"	58.26"	58.36"
72"	70.41"	70.66"	70.26"	70.36"
84"	82.41"	82.66"	82.26"	82.36"
96"	94.41"	94.66"	94.26"	94.36"



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH IQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP IQ-PH IQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES


HINGE - HMB-M



1.41"
.71"

Adjustable mounting bracket - Medium

HINGE - HMB-L



1.46"
1.29"

Adjustable mounting bracket - Large

HINGE - HMB-XL



4"
1.46"

Adjustable mounting bracket - XLarge


Q-PIVOT



.75"
1.03"

Small mounting accessory

Q-ANGLE



2.23"
1.38"

Adjustable mounting accessory

NJ-MEDIUM



J Mounting Bracket

NJ-LARGE



J Mounting Bracket

SD-J-LARGE



J Mounting Bracket

NU-LARGE



U Mounting Bracket

BL-LARGE



Backwards L Mounting Bracket

NL-LARGE




L Mounting Bracket

SD-L-LARGE



L Mounting Bracket


MMA-01



.23"
.75"

Magnet Mount Accessory of MG-01

MMA-04



.19"
.93"


Magnet Mount Accessory of MG-04



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

Q-mini-J  1.25" x 2" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5  2.27" x 2.80" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	BARREL-EXT  8ft barrel cable extender DRY ONLY	BARREL FOUR-FER  Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	CON120-EXT  10ft Con cable extender DRY/DMP/WET	CON FOUR-FER  Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL F  Male con to barrel cable adaptor DRY/DMP
--	--	---	--	--	--	--

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage