




# ESSENTIALS TORQ- ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed



- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Optional plastic louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 INPUT END CAP	11 OUTPUT END CAP	12 WIRE COLOR	13 WIRE TYPE	14 MOUNTING	15 FINISH	16 LENGTH (IN)	17 EXACT/ OPTIMAL
			ENC													

Sample Part Number: TQ3SW-5.0-30-ENC-WO-TL-P1-BW-BW-STD-STD-BK-CL2-SST-ST-48"-E


<b>1</b> <b>PRODUCT</b>  <b>TQ3SW</b> <b>TQ3SW-USA</b>  Select USA option for BAA and BABA projects.  See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  <b>1.5</b> 1.5W/ft <b>3.0</b> 3.0W/ft <b>4.0</b> 4.0W/ft <b>5.0</b> 5.0W/ft <b>1.5HE</b> 1.5W/ft HE <b>3.0HE</b> 3.0W/ft HE <b>6.0HE</b> 6.0W/ft HE	<b>3</b> <b>CCT</b>  <b>24</b> 2400K <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>4</b> <b>RATED</b>  <b>ENC</b> IP67	<b>5</b> <b>EFFICIENCY</b>  <b>STD</b> Standard <b>WO</b> White Optics  WhiteOptics - Internal coating, greater lumen output	<b>6</b> <b>LENS</b>  <b>CL</b> Clear <b>TL</b> Translucent  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  <b>S1</b> Single 1 (Input only) - End Feed <b>S2</b> Single 2 (Input only) - Bottom Feed <b>S3</b> Single 3 (Input only) - Left Side Feed <b>S4</b> Single 4 (Input only) - Right Side Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  <b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  <b>CLS</b> Closed End (No feed)			
<b>P1</b> Pass Through 1 (Input/output) - End Feed <b>P2</b> Pass Through 2 (Input/output) - Bottom Feed <b>P3</b> Pass Through 3 (Input/output) - Left Side Feed <b>P4</b> Pass Through 4 (Input/output) - Right Side Feed	<b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"			
For continuous mounting, consider bottom or side feed	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
<b>10</b> <b>INPUT END CAP</b>  <b>STD</b> Standard <b>CL</b> Clear  STD - End cap matches fixture finish chosen  Select CL for continuous runs	<b>11</b> <b>OUTPUT END CAP</b>  <b>STD</b> Standard <b>CL</b> Clear  STD - End cap matches fixture finish chosen  Select CL for continuous runs	<b>12</b> <b>WIRE COLOR</b>  <b>WH</b> White <b>BK</b> Black <b>N/A</b> For Barrel	<b>13</b> <b>WIRE TYPE</b>  <b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated <b>N/A</b> For Barrel  CL2P only available with bare wire leads (BW)		
<b>14</b> <b>MOUNTING</b>  <b>SST</b> Stainless Steel <b>M4</b> Low Profile Magnet <b>MG</b> Magnet	<b>15</b> <b>FINISH</b>  <b>ST</b> Satin <b>BK</b> Black <b>BZ</b> Bronze <b>CU</b> Custom  Custom finishes require a longer lead time, consult factory	<b>16</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>17</b> <b>EXACT/OPTIMAL</b>  <b>O</b> Optimal Illumination <b>E</b> Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.		



# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

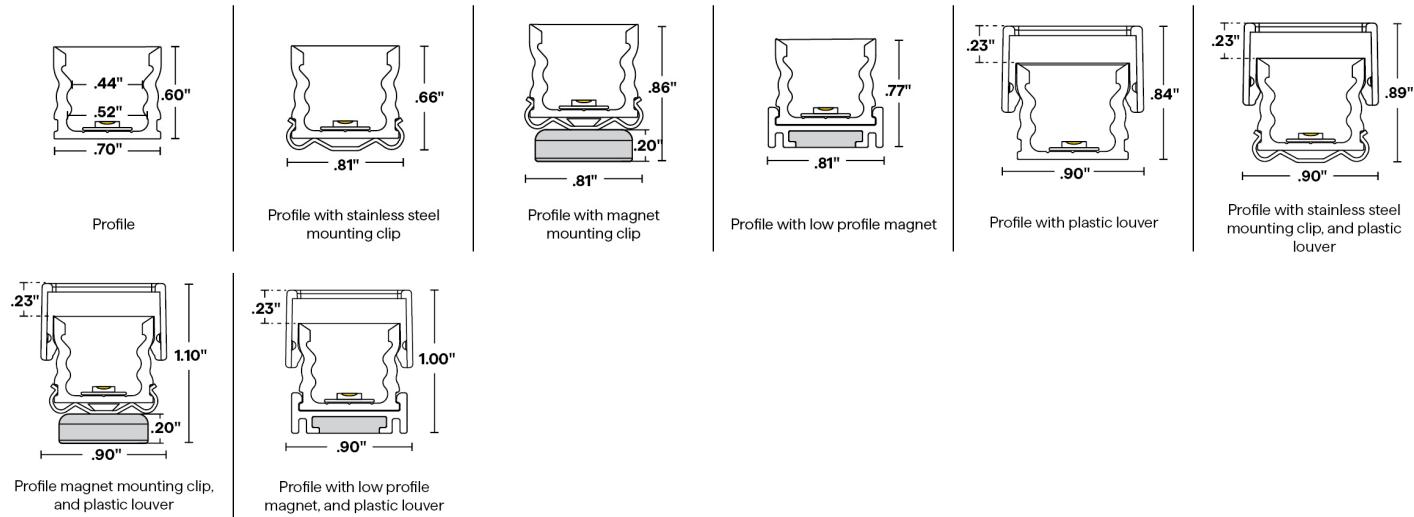

## 2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with TQ3SW-\*\*-30-ENC-STD

	1.5 W/FT	1.5HE W/FT	3.0 W/FT	3.0HE W/FT	4.0 W/FT	5.0 W/FT	6.0HE W/FT							
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI		
CL	92	98	128	98	161	98	234	98	200	98	244	98	443	98
TL	78	98	117	98	136	98	214	98	169	98	205	98	406	98

[Calculated L70 = 40000 hrs]  
Tested with TQ3SW-\*\*-30-ENC-WO

	1.5 W/FT	1.5HE W/FT	3.0 W/FT	3.0HE W/FT	4.0 W/FT	5.0 W/FT	6.0HE W/FT							
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI		
CL	100	98	131	98	174	98	240	98	216	98	263	98	455	98
TL	88	98	119	98	153	98	218	98	190	98	232	98	412	98

## TEMPERATURE RATINGS

	1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	125°F	-4°F	120°F	-4°F	110°F	-4°F	115°F



# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## 6 DIODE VISIBILITY




ENC/CL - Clear encapsulation




ENC/TL - Translucent encapsulation

## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)

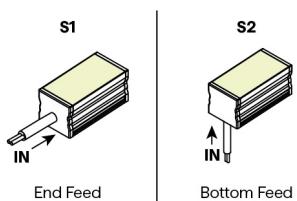


End Feed

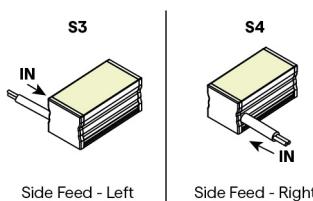

Side Feed - Left


Side Feed - Right

PASS THROUGH (Input/Output)

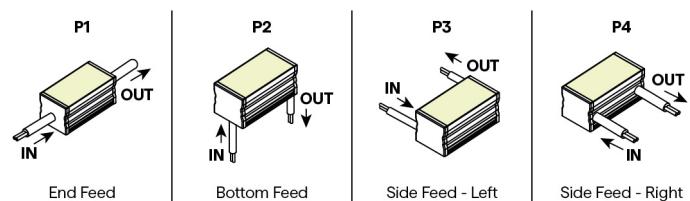


End Feed

Bottom Feed




Side Feed - Left




Side Feed - Right


## CONFIGURATION OPTIONS




Single End Feed




Non-Continuous End Feed




Continuous Bottom Feed




Continuous Side Feed - Right




Continuous End to End Feed




Continuous Bottom Feed




Continuous Side Feed - Right



Continuous End to End Feed



Continuous Side Feed - Left



No dim spot,  
clear endcaps

Continuous Side Feed - Left




## ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

### 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out


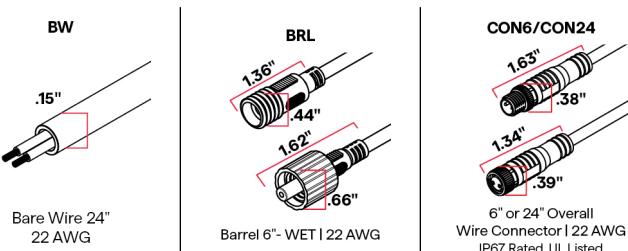


### 10 / 11 END CAP – IN/OUT

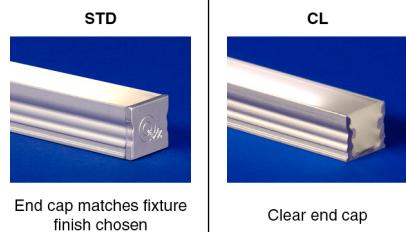

## EXTERNAL LOUVER ACCESSORY

### PLASTIC

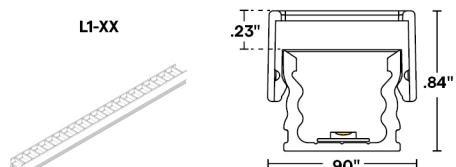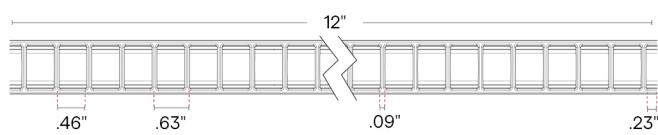

Lumen Multiplier  
WH BK  
0.70 0.49

Profile with plastic louver  
To order separately use  
TORQ-L1-FLAT-KIT-WH or  
TORQ-L1-FLAT-KIT-BK



# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

## 12 WIRE COLOR



White  
Black

## 14 MOUNTING

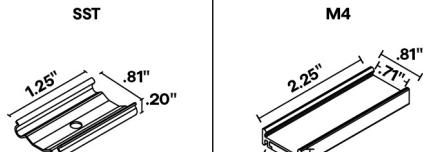


Stainless Steel Clip

2 clips provided for 4' or less; 4  
clips provided for greater than  
4'

To order separately use SST-01


Each clip comes with a #4 x  
5/8" Flat Head screw



Low Profile Magnet

One M4 provided per foot.

To order separately use  
MG-04




Magnet Mount  
Accessory for M4

Sold separately, to order use  
MMA-04

Each bracket comes with 2 #6  
x 5/8" Flat Head SS

Required when mounting to a  
non-magnetic surface



Magnet Clip

One MG provided per foot

To order separately use MG-01

## 15 FINISH



Satin  
Black  
Bronze

Custom finishes require  
a longer lead time,  
consult factory

## MMA-01



Magnet Mount  
Accessory of MG-01

Sold separately, to order use  
MMA-01

Each bracket comes with 2 #6  
x 5/8" Flat Head SS


Required when mounting to a  
non-magnetic surface

## 17 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

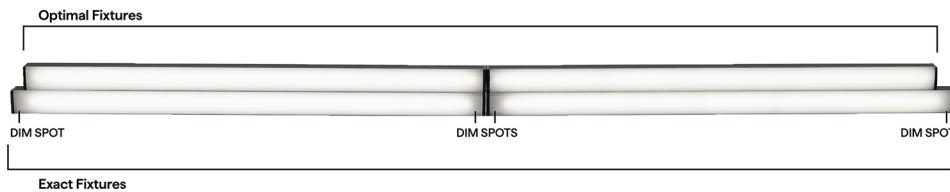



# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## SW ENC LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	11.41"		11.66"		11.26"		11.36"	
13"	12.41"		12.66"		12.26"		12.36"	
14"	13.41"		13.66"		13.26"		13.36"	
15"	14.41"		14.66"		14.26"		14.36"	
16"	15.41"		15.66"		15.26"		15.36"	
17"	16.41"		16.66"		16.26"		16.36"	
18"	17.41"		17.66"		17.26"		17.36"	
19"	18.41"		18.66"		18.26"		18.36"	
20"	19.41"		19.66"		19.26"		19.36"	
21"	20.41"		20.66"		20.26"		20.36"	
22"	21.41"		21.66"		21.26"		21.36"	
23"	22.41"		22.66"		22.26"		22.36"	
24"	23.41"		23.66"		23.26"		23.36"	
36"	35.41"		35.66"		35.26"		35.36"	
48"	47.41"		47.66"		47.26"		47.36"	
60"	59.41"		59.66"		59.26"		59.36"	
72"	71.41"		71.66"		71.26"		71.36"	
84"	83.41"		83.66"		83.26"		83.36"	
96"	95.41"		95.66"		95.26"		95.36"	

## SW-HE ENC LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.41"		10.66"		10.26"		10.36"	
13"	12.41"		12.66"		12.26"		12.36"	
14"	12.41"		12.66"		12.26"		12.36"	
15"	14.41"		14.66"		14.26"		14.36"	
16"	14.41"		14.66"		14.26"		14.36"	
17"	16.41"		16.66"		16.26"		16.36"	
18"	16.41"		16.66"		16.26"		16.36"	
19"	18.41"		18.66"		18.26"		18.36"	
20"	18.41"		18.66"		18.26"		18.36"	
21"	20.41"		20.66"		20.26"		20.36"	
22"	20.41"		20.66"		20.26"		20.36"	
23"	22.41"		22.66"		22.26"		22.36"	
24"	22.41"		22.66"		22.26"		22.36"	
36"	34.41"		34.66"		34.26"		34.36"	
48"	46.41"		46.66"		46.26"		46.36"	
60"	58.41"		58.66"		58.26"		58.36"	
72"	70.41"		70.66"		70.26"		70.36"	
84"	82.41"		82.66"		82.26"		82.36"	
96"	94.41"		94.66"		94.26"		94.36"	



# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
<b>Dim to Black</b>	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	



# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

## COMPATIBLE MOUNTING ACCESSORIES


<b>HINGE - HMB-M</b> 1.41" 1.71"	<b>HINGE - HMB-L</b> 1.46" 1.29"	<b>HINGE - HMB-XL</b> 1.46" 4"	<b>Q-PIVOT</b> .75" 1.03"	<b>Q-ANGLE</b> 1.38" 2.23"	<b>NJ-MEDIUM</b> 	<b>NJ-LARGE</b> 	<b>SD-J-LARGE</b> 	<b>NU-LARGE</b> 	<b>BL-LARGE</b> 
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	J Mounting Bracket	J Mounting Bracket	J Mounting Bracket	U Mounting Bracket	Backwards L Mounting Bracket
<b>NL-LARGE</b> 	<b>SD-L-LARGE</b> 	<b>MMA-01</b> .23" .75"	<b>MMA-04</b> .19" .93"						
L Mounting Bracket	L Mounting Bracket	Magnet Mount Accessory of MG-01	Magnet Mount Accessory of MG-04						



# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE WIRING ACCESSORIES

 Q-mini-J 2" 1.25"	 Q-mini-J5 2.80" 2.27"	 BARREL-EXT	 BARREL FOUR-FER	 CON120-EXT	 CON FOUR-FER	 CON M - BARREL F
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	8ft barrel cable extender DRY ONLY	Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	10ft Con cable extender DRY/DMP/WET	Splits lead from one to four LED Con connectors DRY/DMP/WET	Male con to barrel cable adaptor DRY/DMP

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS

### NFC APP



Read and write DMX addresses and adjust voltage