




# MICRO 5 POP MUD-IN- ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Recessed



Declare.



- Polyurethane filled MICRO 5 fixture with an IP67 and IK10 rating
- The asymmetric fixture allows for light to be thrown at an angle without the need to adjust the mounting
- Excellent solution for drywall applications
- Consult factory for field assembly options

## ORDERING PROCESS

**A** Specify LED Fixture

**B** Specify MUD-IN Housing

### A. LED FIXTURE

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12	A13	A14
PRODUCT	WATTS/FT	CCT	RATED	LENS	WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
POP-03-SW			ENC										

Sample Part Number: POP-03-SW-4.0-30-ENC-TL-S1A-BW-CLS-WH-CL2-MG-SP-48"-E

<b>A1</b> <b>PRODUCT</b>  POP-03-SW  See following pages for compatible power supplies.	<b>A2</b> <b>WATTS/FT</b>  1.0 1.0W/ft 2.0 2.0W/ft 4.0 4.0W/ft	<b>A3</b> <b>CCT</b>  24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	<b>A4</b> <b>RATED</b>  ENC IP67	<b>A5</b> <b>LENS</b>  CL Clear TL Translucent  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	
<b>A6</b> <b>WIRE INPUT/OUTPUT</b>  S1A Single 1 (Input only) - End Feed S1B Single 1 (Input only) - End Feed S2A Single 2 (Input only) - Bottom Feed S2B Single 2 (Input only) - Bottom Feed  For continuous mounting, consider bottom feed.	<b>A7</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>A8</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)			
<b>P1A</b> Pass Through 1 (Input/output) - End Feed <b>P1B</b> Pass Through 1 (Input/output) - End Feed <b>P2A</b> Pass Through 2 (Input/output) - Bottom Feed <b>P2B</b> Pass Through 2 (Input/output) - Bottom Feed  For continuous mounting, consider bottom feed.	<b>P1A</b> Pass Through 1 (Input/output) - End Feed <b>P1B</b> Pass Through 1 (Input/output) - End Feed <b>P2A</b> Pass Through 2 (Input/output) - Bottom Feed <b>P2B</b> Pass Through 2 (Input/output) - Bottom Feed  BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>P1A</b> Pass Through 1 (Input/output) - End Feed <b>P1B</b> Pass Through 1 (Input/output) - End Feed <b>P2A</b> Pass Through 2 (Input/output) - Bottom Feed <b>P2B</b> Pass Through 2 (Input/output) - Bottom Feed  BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)		
<b>A9</b> <b>WIRE COLOR</b>  WH White BK Black N/A For Barrel	<b>A10</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated N/A For Barrel  CL2P only available with bare wire leads (BW)	<b>A11</b> <b>MOUNTING</b>  SC Screw SP Spring Clip  Plastic Clips are provided when ordering Spring Clip or Screw	<b>A12</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze WH White CU Custom	<b>A13</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".	<b>A14</b> <b>EXACT/OPTIMAL</b>  E Exact specified length O Optimal illumination  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



## MICRO 5 POP MUD-IN-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Recessed

### B. MUD-IN HOUSING

B1	B2
PRODUCT	LENGTH
MD	

Sample Part Number: **MD-FCN**

B1	PRODUCT	B2	LENGTH
	<b>MD</b> Test Note Here		
		FCN CTL	Field Cuttable Cut to Length


PRELIMINARY  
SUBJECT TO CHANGE



# MICRO 5 POP MUD-IN-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Recessed

## A1 PRODUCT - DIMENSIONS

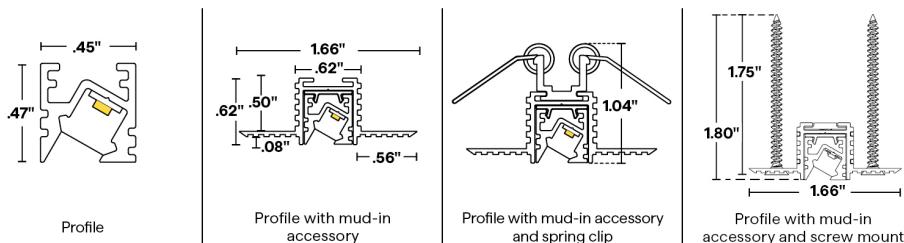

## A2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with POP-03-SW-\*\*-30-ENC

	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
TL	29	95	55	95	119	95

## A5 DIODE VISIBILITY



ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation

## TEMPERATURE RATINGS

	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	120°F	-4°F	105°F




# MICRO 5 POP MUD-IN-ENCAPSULATED (03) STATIC WHITE


24VDC Linear Fixtures - Recessed

## A6 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)

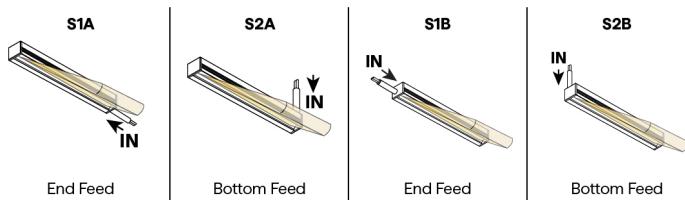

ASYMMETRIC ONLY PASS THROUGH (Input/Output)

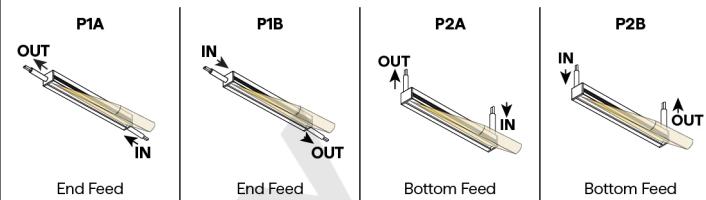


## CONFIGURATION OPTIONS

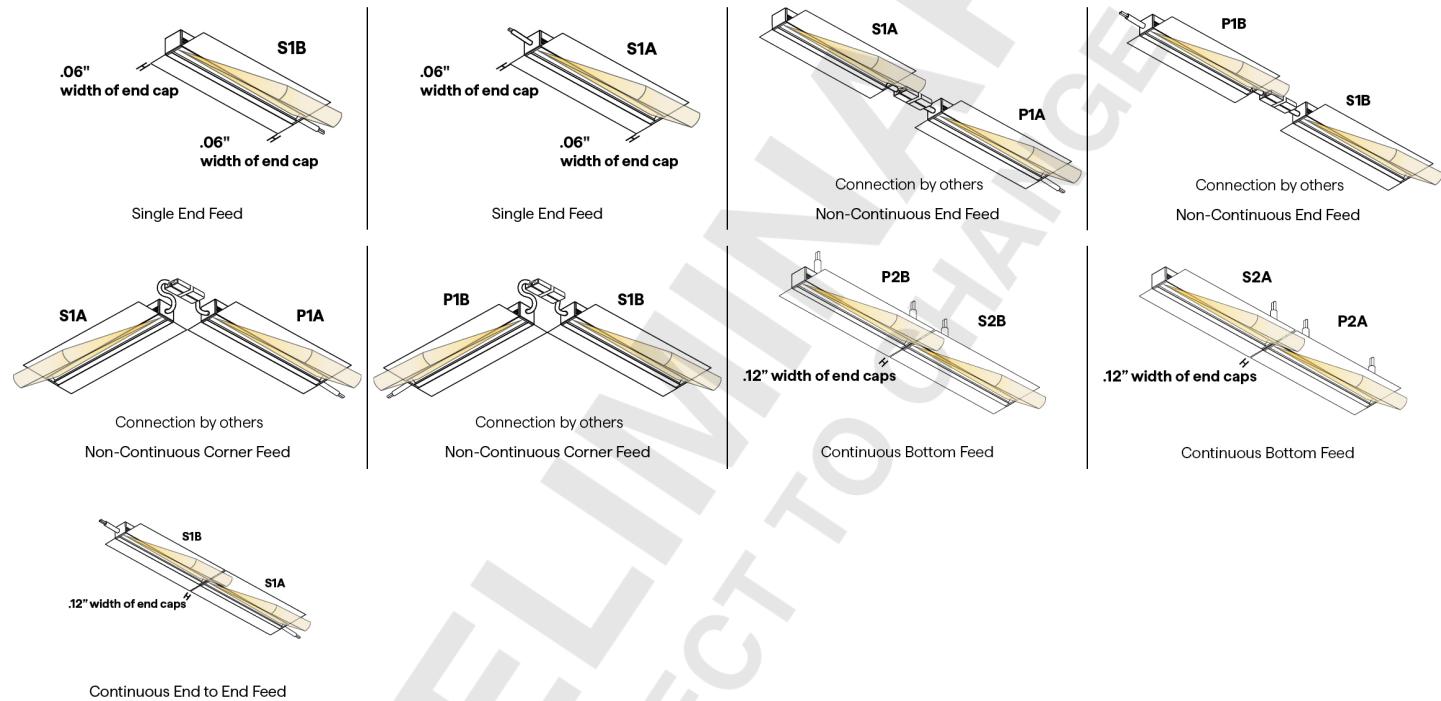

## A7 / A8 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

BW

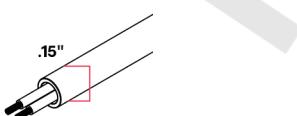

Bare Wire 24"  
22 AWG

## A9 WIRE COLOR



White



Black



# MICRO 5 POP MUD-IN-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Recessed

## A11 MOUNTING

 <b>PL</b> Plastic Clip	 <b>SP</b> Spring Clip	 <b>832</b> 832 Silicone	6 #6x32, 3/8" long flat head screws are provided for each full length of MUD-IN
2 clips provided for 4' or less; 4 clips provided for greater than 4'  To order separately use PLC-16; PL provided with MDIN  Each clip comes with a #4 x 5/8" Flat Head SS"	Only to be used with mud-in accessory  4 clips provided for each full length of MUD-IN  To order separately use SP-02	Sold separately	

## A12 FINISH



## A14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





# MICRO 5 POP MUD-IN-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Recessed

## SW ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 – 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

### OPTIMAL LENGTH

Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	11.5"			11.75"
13"	12.5"			12.75"
14"	13.5"			13.75"
15"	14.5"			14.75"
16"	15.5"			15.75"
17"	16.5"			16.75"
18"	17.5"			17.75"
19"	18.5"			18.75"
20"	19.5"			19.75"
21"	20.5"			20.75"
22"	21.5"			21.75"
23"	22.5"			22.75"
24"	23.5"			23.75"
36"	35.5"			35.75"
48"	47.5"			47.75"
60"	59.5"			59.75"
72"	71.5"			71.75"
84"	83.5"			83.75"
96"	95.5"			95.75"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-SW	MICRO 5-SW
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED



# MICRO 5 POP MUD-IN-ENCAPSULATED (03) STATIC WHITE

## 24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-SW	MICRO 5-SW
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

## COMPATIBLE WIRING ACCESSORIES



## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity



## MICRO 5 POP MUD-IN-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Recessed

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage

PRELIMINARY  
SUBJECT TO CHANGE