



MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed



Declare



- Recessable MICRO 5 fixture with a 90° focused beam 30° off-nadir
- The asymmetric fixture allows for light to be thrown at an angle without the need to adjust the mounting
- Excellent solution for drywall applications
- Consult factory for field assembly options

ORDERING PROCESS

A Specify LED Fixture

B Specify MUD-IN Housing

A. LED FIXTURE

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12	A13	A14
PRODUCT	WATTS/FT	CCT	RATED	LENS	WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
POP-01-DW	2.0		DRY										

Sample Part Number: POP-01-DW-2.0-2.0/30-DRY-DF-S1A-BW-CLS-WH-CL2-SP-ST-48"-E

A1 PRODUCT POP-01-DW See following pages for compatible power supplies.	A2 WATTS/FT 2.0 2.0W/ft	A3 CCT 20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K	A4 RATED DRY IP20	A5 LENS DF Diffused PR Polar For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	
A6 WIRE INPUT/OUTPUT S1A Single 1 (Input only) - End Feed S1B Single 1 (Input only) - End Feed S2A Single 2 (Input only) - Bottom Feed S2B Single 2 (Input only) - Bottom Feed For continuous mounting, consider bottom feed.	A7 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	A8 CONNECTOR/WIRE OUT CLS Closed End (No feed)			
P1A Pass Through 1 (Input/output) - End Feed P1B Pass Through 1 (Input/output) - End Feed P2A Pass Through 2 (Input/output) - Bottom Feed P2B Pass Through 2 (Input/output) - Bottom Feed For continuous mounting, consider bottom feed.	BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
A9 WIRE COLOR WH White BK Black	A10 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	A11 MOUNTING SC Screw SP Spring Clip Plastic Clips are provided when ordering Spring Clip or Screw	A12 FINISH ST Satin BK Black BZ Bronze WH White CU Custom	A13 LENGTH (IN) Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".	A14 EXACT/OPTIMAL E Exact specified length O Optimal illumination Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

B. MUD-IN HOUSING

B1 PRODUCT	B2 LENGTH
B1 PRODUCT	B2 LENGTH


PRELIMINARY
SUBJECT TO CHANGE



MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

A1 PRODUCT - DIMENSIONS

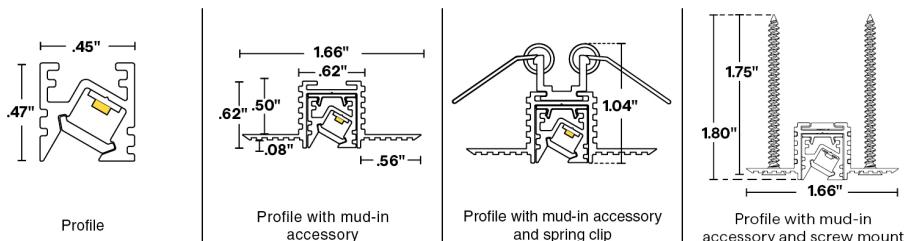

A2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with POP-01-DW-2.0.**-DRY

	2000K		2700K		3000K		4000K		5500K	
	LM/FT	CRI								
PR	77	93	89	98	93	98	95	97	100	97
DF	69	93	81	98	83	98	86	97	93	97

A5 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



DF lens at 3000K



MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Recessed

TEMPERATURE RATINGS


		DW 2.0 W/FT			
Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply			
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	110°F

A6 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)

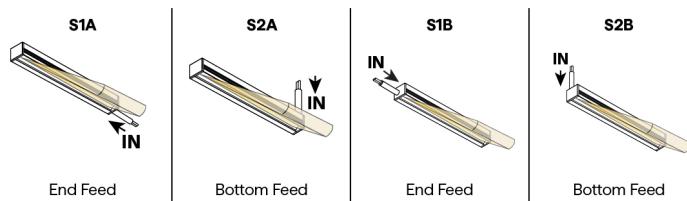

ASYMMETRIC ONLY PASS THROUGH (Input/Output)

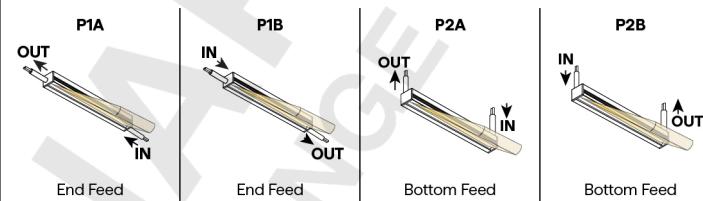

CONFIGURATION OPTIONS

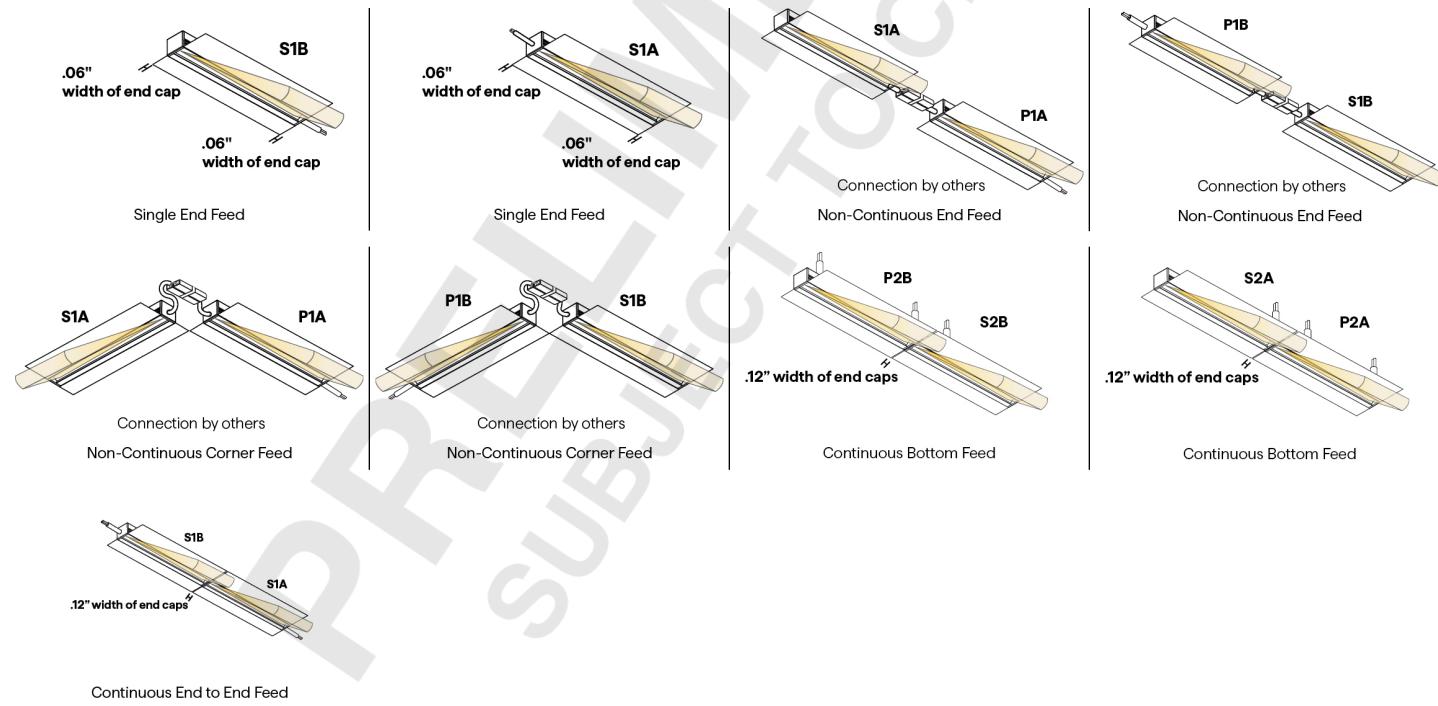




MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

A7 / A8 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

BW



Bare Wire 24"
22 AWG


A9 WIRE COLOR



White

Black

A11 MOUNTING






MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

A14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

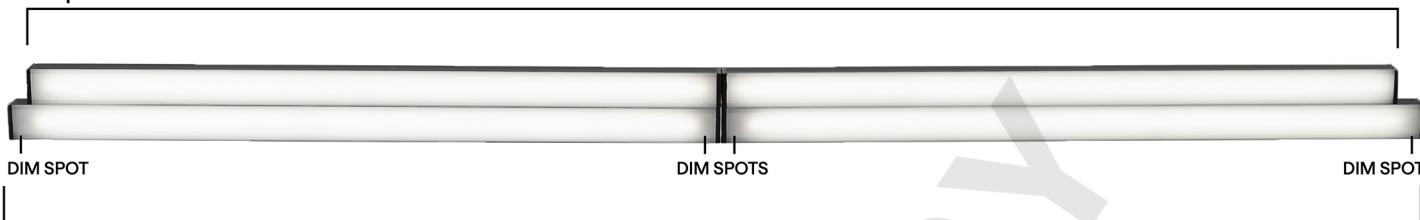

Exact Fixtures

DW DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1A/B & S2A/B	P1A/B & P2A/B
12"	10.5"	10.75"
13"	12.5"	12.75"
14"	12.5"	12.75"
15"	14.5"	14.75"
16"	14.5"	14.75"
17"	16.5"	16.75"
18"	16.5"	16.75"
19"	18.5"	18.75"
20"	18.5"	18.75"
21"	20.5"	20.75"
22"	20.5"	20.75"
23"	22.5"	22.75"
24"	22.5"	22.75"
36"	34.5"	34.75"
48"	46.5"	46.75"
60"	58.5"	58.75"
72"	70.5"	70.75"
84"	82.5"	82.75"
96"	94.5"	94.75"



MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed


COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-DW Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DMX QZ-DW
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle

DIMMING PROTOCOL	INDOOR
	MICRO 5-DW Warm Dim Applications
Phase	QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRV/DMP (WET rated with silicone)



MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage

PRELIMINARY
SUBJECT TO CHANGE