



MICRO 5 POP MUD-IN-FLAT (01)

STATIC WHITE

24VDC Linear Fixtures - Recessed





MICRO 5 POP MUD-IN-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

B. MUD-IN HOUSING

B1	PRODUCT	B2	LENGTH
	POP-MD		

Sample Part Number: **POP-MD-FCN**


B1	PRODUCT	B2	LENGTH
	POP-MD	FCN Field Cuttable CTL Cut to Length	Full length 98.43" housings will be sent for field cuttable specifications. Quantity will be determined by dividing the POP fixture measurements by 98.43 and rounding up. Cut to length housing specifications will be the length of the POP fixture specified, plus .125" for endcaps.




MICRO 5 POP MUD-IN-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed


A1 PRODUCT - DIMENSIONS




Profile



Profile with mud-in accessory



Profile with mud-in accessory and spring clip




Profile with mud-in accessory and screw mount

END CAPS

Flat end caps



Feed



Feed

To order separately, use
POP-EC-MDIN-A-ST

To order separately, use
POP-EC-MDIN-B-ST

A2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]

Tested with POP-01-SW-**-30-DRY

	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	42	97	85	98	198	98
DF	38	97	74	98	178	98

A5 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



DF lens at 3000K



MICRO 5 POP MUD-IN-FLAT (01) STATIC WHITE



24VDC Linear Fixtures - Recessed

TEMPERATURE RATINGS


		1.0 W/FT		2.0 W/FT		4.0 W/FT	
		Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	135°F	-4°F	130°F	-4°F	110°F
DMP	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	125°F	-4°F	105°F

A6 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)



ASYMMETRIC ONLY PASS THROUGH (Input/Output)

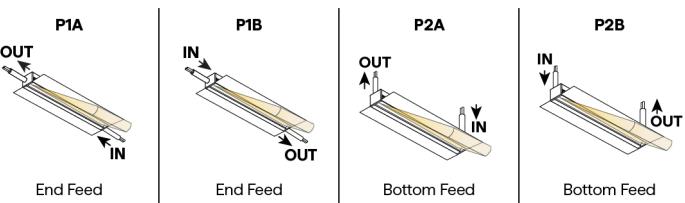

CONFIGURATION OPTIONS

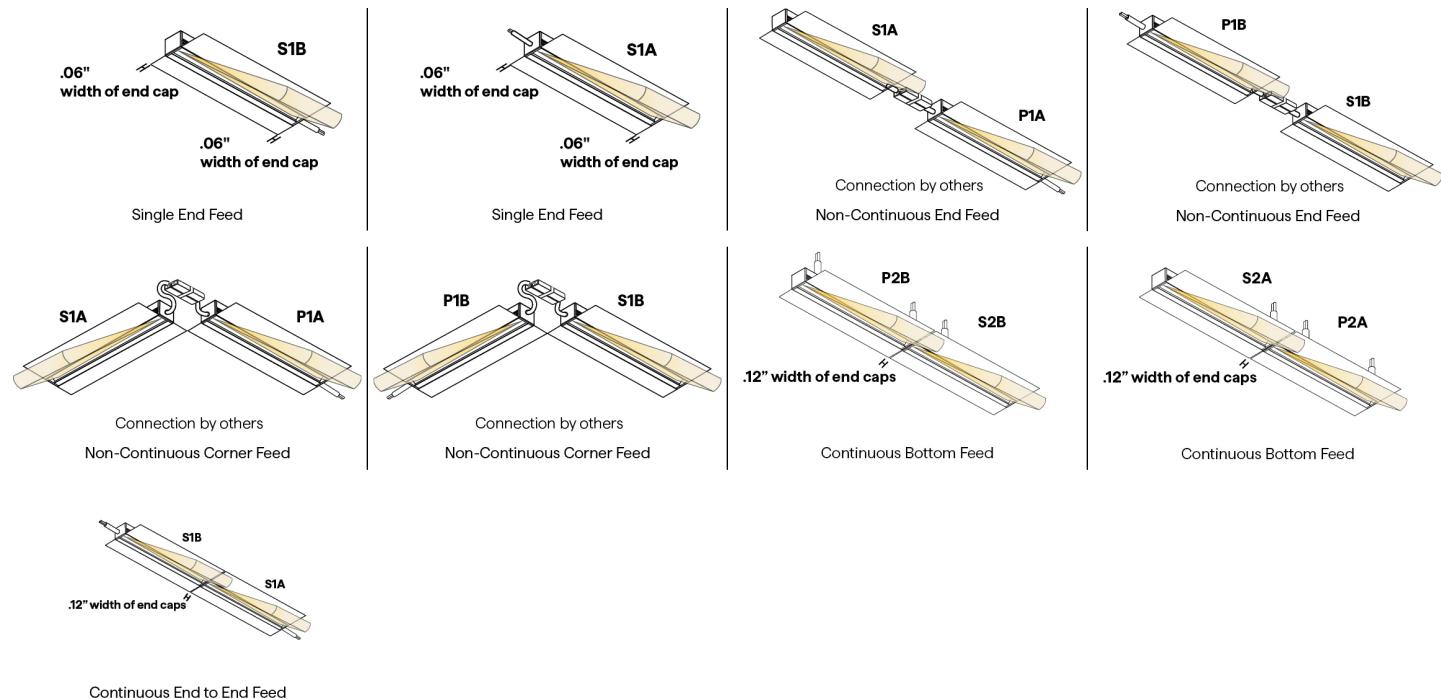




MICRO 5 POP MUD-IN-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

A7 / A8 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

BW



Bare Wire 24"
22 AWG

A9 WIRE COLOR




White

Black

A11 MOUNTING

POP-MD-MNT-KIT




Plastic Clip Kit

2 clips provided for 4' or less;
4 clips provided for greater
than 4'

To order separately use POP-
MD-MNT-KIT

Each clip comes with a #4 x
3/16 Flat Head SS" and two
#6 x 1/8" long set screws

SP



Spring Clip

Only to be used with mud-in
accessory

4 clips provided for each full
length of MUD-IN

To order separately use
SP-02


832



832 Silicone

Sold separately

SC



Screw

6 #6x1.75" flat head screws
are provided for each full
length of MUD-IN

A12 FINISH



Satin

Black

Bronze

White

Custom finishes require a longer lead time, consult factory




MICRO 5 POP MUD-IN-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

A14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

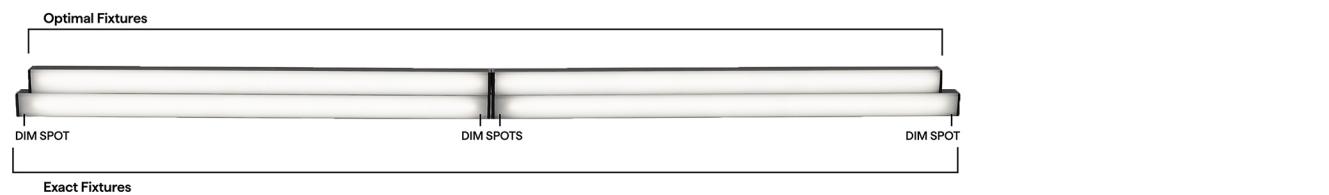

SW DRY DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	11.5"			11.75"
13"	12.5"			12.75"
14"	13.5"			13.75"
15"	14.5"			14.75"
16"	15.5"			15.75"
17"	16.5"			16.75"
18"	17.5"			17.75"
19"	18.5"			18.75"
20"	19.5"			19.75"
21"	20.5"			20.75"
22"	21.5"			21.75"
23"	22.5"			22.75"
24"	23.5"			23.75"
36"	35.5"			35.75"
48"	47.5"			47.75"
60"	59.5"			59.75"
72"	71.5"			71.75"
84"	83.5"			83.75"
96"	95.5"			95.75"



MICRO 5 POP MUD-IN-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-SW
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle




MICRO 5 POP MUD-IN-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-SW
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle

COMPATIBLE WIRING ACCESSORIES

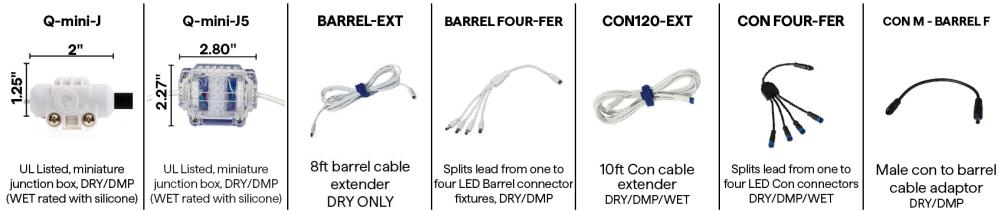

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity



MICRO 5 POP MUD-IN-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage