



# MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed



- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- Sleek flat profile and three-sided dropped lens
- 62% smaller than ESSENTIALS-TRE3
- Delivers equivalent efficacy as standard size fixtures
- Choose from diffused or frosted lens options for varying diode visibility and beam angles
- Ideal for surface mounted or recessed installations that call for low-profile light in small areas
- Mounting options include a mounting clip, magnet option, or TBAR clip, making installation and repositioning effortless
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled
- Consult factory for field assembly options

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

| 1<br>PRODUCT | 2<br>WATTS/ FT | 3<br>CCT | 4<br>RATED | 5<br>LENS |
|--------------|----------------|----------|------------|-----------|
| ALTA-04-DW   | 2.0            |          | DRY        |           |

## ADDITIONAL INFORMATION REQUIRED TO ORDER

| 6<br>WIRE INPUT/ OUTPUT | 7<br>CONNECTOR/ WIRE IN | 8<br>CONNECTOR/ WIRE OUT | 9<br>WIRE COLOR | 10<br>WIRE TYPE | 11<br>MOUNTING | 12<br>FINISH | 13<br>LENGTH (IN) | 14<br>EXACT/ OPTIMAL |
|-------------------------|-------------------------|--------------------------|-----------------|-----------------|----------------|--------------|-------------------|----------------------|
|                         |                         |                          |                 |                 |                |              |                   |                      |

Sample Part Number: ALTA-04-DW-2.0-20/27-DRY-FR-S1-BW-CLS-WH-CL2-SST-ST-48"-E

| 1<br>PRODUCT  | 2<br>WATTS/FT | 3<br>CCT   | 4<br>RATED | 5<br>LENS   |
|---|---------------|--|------------|---|
| ALTA-04-DW<br>ALTA-04-DW-USA  | 2.0 2.0W/ft   | 20/27<br>20/30<br>27/40<br>27/55                         | DRY        | IP20  |
| Select USA option for BAA and BABA projects.<br><br>LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies. |               | 2000K/2700K<br>2000K/3000K<br>2700K/4000K<br>2700K/5500K |            | DF<br>FR<br><br>For representation of LED visibility, see Diode Visibility section on following pages.<br>For beam angles, see Photometric Performance section on following pages |

| 6<br>WIRE INPUT/OUTPUT  | 7<br>CONNECTOR/WIRE IN   | 8<br>CONNECTOR/WIRE OUT  |
|---|--|--|
| <b>SINGLE (Input only)</b><br>S1 End Feed<br>S2 Bottom Feed<br><br>For continuous mounting, consider bottom feed. When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.         | <b>BW</b><br><b>CON6</b><br><b>CON24</b><br><br>BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48) | <b>CLS</b><br><br>Closed End (No feed)   |
| <b>PASS THROUGH (Input/output)</b><br>P1 End Feed<br>P2 Bottom Feed<br><br>For continuous mounting, consider bottom feed. When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details. | <b>BW</b><br><b>CON6</b><br><b>CON24</b><br><br>BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48) | <b>BW</b><br><b>CON6</b><br><b>CON24</b><br><br>BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48) |

| 9<br>WIRE COLOR      | 10<br>WIRE TYPE   | 11<br>MOUNTING  | 12<br>FINISH   | 13<br>LENGTH (IN)   | 14<br>EXACT/OPTIMAL   |
|----------------------|---|---|--|---|---|
| WH White<br>BK Black | CL2 Class 2<br>CL2P Plenum Rated<br><br>CL2P only available with bare wire leads (BW) | SST Stainless Steel<br>MG Magnet<br>TBC-09 9/16" Flat or Tegular TB-Grid<br>TBC-10 15/16" Flat or Tegular TB-Grid | ST Satin<br>BK Black<br>CU Custom<br><br>Custom finishes require a longer lead time, consult factory | Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12". | <b>E</b> Exact specified length<br><b>O</b> Optimal illumination<br><br>Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. |


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

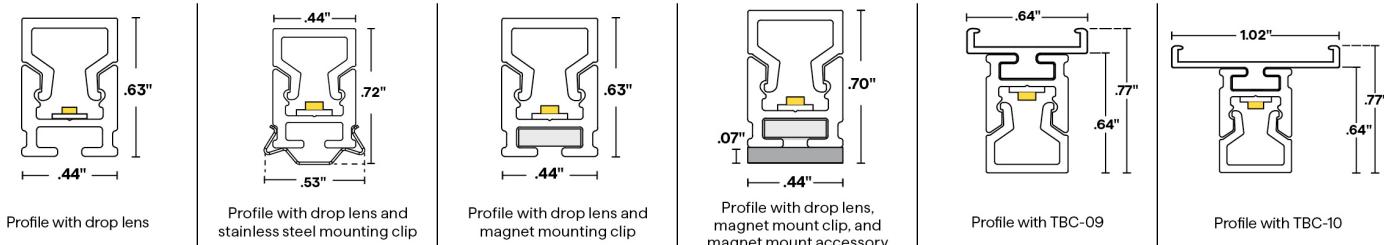

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with ALTA-04-DW-2.0-\*\*-DRY

|    | 2000K |     | 2700K |     | 3000K |     | 4000K |     | 5500K |     |
|----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|
|    | LM/FT | CRI |
| FR | 100   | 94  | 117   | 98  | 120   | 98  | 128   | 97  | 135   | 97  |
| DF | 79    | 94  | 92    | 98  | 95    | 98  | 102   | 97  | 107   | 97  |

## 5 DIODE VISIBILITY




DF - Diffused lens

FR - Frosted lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



DF lens at 3000K

## TEMPERATURE RATINGS

|     |                                   | DW 2.0 W/FT                           |       | DW 4.0 W/FT                        |       |
|-----|-----------------------------------|---------------------------------------|-------|------------------------------------|-------|
|     |                                   | QTL power supply other than DALI, DMX |       | DALI, DMX, or non-QTL power supply |       |
|     |                                   | Min                                   | Max   | Min                                | Max   |
| DRY | Ambient Operating Temp - Recessed | **                                    | **    | **                                 | **    |
|     | Ambient Operating Temp - Surface  | -4°F                                  | 140°F | -4°F                               | 120°F |




## MICRO 5 ALTA-DROP (04) FOR WARM DIM


24VDC Linear Fixtures - Surface & Recessed

### 6 WIRE INPUT/OUTPUT


SINGLE (Input only)

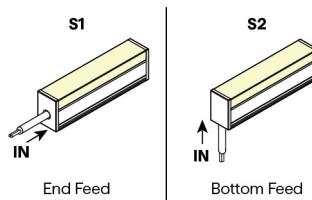


PASS THROUGH (Input/Output)

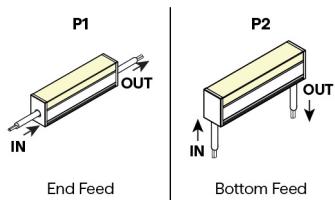


### CONFIGURATION OPTIONS

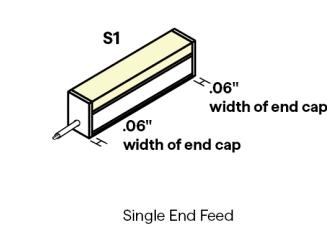


Single End Feed

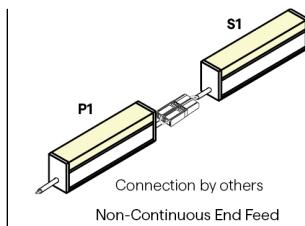


Connection by others  
Non-Continuous End Feed



Connection by others  
Non-Continuous Corner Feed

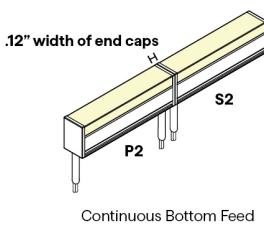


Continuous Bottom Feed




Continuous End to End Feed

### 7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out




Bare Wire 24"  
22 AWG



6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

### 9 WIRE COLOR



White






Black



# MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

## 11 MOUNTING

| SST  | MG   | MMA-03   | TBC-09  | TBC-10   |
|--|--|--|---|--|
| <br>Stainless Steel Clip<br>1.25" x .52" x .21"<br>2 pieces of hardware provided for 4' or less; 4 pieces provided for greater than 4'<br>To order separately use SST-08<br>Each clip comes with a #4 x 5/8" Flat Head SS | <br>Magnet Clip<br>0.95" x 0.28" x 0.08"<br>One MG provided per foot<br>To order separately use MG-03 | <br>Magnet Mount Accessory for MG-03<br>96" lengths   Sold separately, to order use MMA-03<br>Each bracket comes with 2 #6 x 5/8" Flat Head SS per foot<br>Required when mounting to a non-magnetic surface | <br>Plastic T-Bar Clip<br>6.4" x 5.0" x 2.7"<br>Use on 9/16" Flat or Tegular Drop Ceiling<br>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length<br>To order separately use TBC-09<br>Each pair of clips comes with M2.5 x 4mm set screw and Allen key | <br>Plastic T-Bar Clip<br>1.02" x 5.0" x 2.7"<br>Use on 15/16" Flat or Tegular Drop Ceiling<br>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length<br>To order separately use TBC-10<br>Each pair of clips comes with M2.5 x 4mm set screw and Allen key |

## 12 FINISH




Satin  
Black

Custom finishes require a longer lead time, consult factory

## 14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

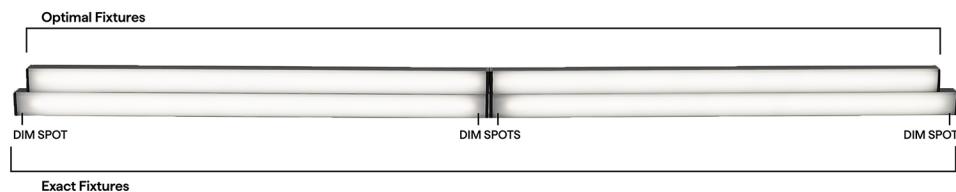



# MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

## DW DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of fixture |
|------------------|---|
| 12"              | 1"  |
| 13"              | .5"   |
| 14"              | 1"  |
| 15"              | .5"   |
| 16"              | 1"  |
| 17"              | .5"   |
| 18"              | 1"  |
| 19"              | .5"   |
| 20"              | 1"  |
| 21"              | .5"   |
| 22"              | 1"  |
| 23"              | .5"   |
| 24"              | 1"  |
| 36"              | 1"  |
| 48"              | 1"  |
| 60"              | 1"  |
| 72"              | 1"  |
| 84"              | 1"  |
| 96"              | 1"  |

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

| Requested Nominal Length | S1 & S2  |             | P1 & P2  |             |
|--------------------------|----------|-------------|----------|-------------|
|                          | End Feed | Bottom Feed | End Feed | Bottom Feed |
| 12"                      |          | 10.38"      |          | 10.63"      |
| 13"                      |          | 12.38"      |          | 12.63"      |
| 14"                      |          | 12.38"      |          | 12.63"      |
| 15"                      |          | 14.38"      |          | 14.63"      |
| 16"                      |          | 14.38"      |          | 14.63"      |
| 17"                      |          | 16.38"      |          | 16.63"      |
| 18"                      |          | 16.38"      |          | 16.63"      |
| 19"                      |          | 18.38"      |          | 18.63"      |
| 20"                      |          | 18.38"      |          | 18.63"      |
| 21"                      |          | 20.38"      |          | 20.63"      |
| 22"                      |          | 20.38"      |          | 20.63"      |
| 23"                      |          | 22.38"      |          | 22.63"      |
| 24"                      |          | 22.38"      |          | 22.63"      |
| 36"                      |          | 34.38"      |          | 34.63"      |
| 48"                      |          | 46.38"      |          | 46.63"      |
| 60"                      |          | 58.38"      |          | 58.63"      |
| 72"                      |          | 70.38"      |          | 70.63"      |
| 84"                      |          | 82.38"      |          | 82.63"      |
| 96"                      |          | 94.38"      |          | 94.63"      |

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR                           |  |
|--------------|----------------------------------|--|
|              | MICRO 5-DW Warm Dim Applications |  |
| 0.1%         |                                  | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT8<br>QT-CAB-eLED+DALI-DT8-AWN<br>QT-CAB-eLED+WD<br>QT-CAB-eLED+WD-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT8<br>QTM-eLED+DALI-DT8-AWN<br>QTM-eLED+WD<br>QTM-eLED+WD-AWN<br>QZ-DMX<br>QZ-DW |
| 1%           |                                  | QZ-DALI-DT8  |
| 10%          |                                  | Non-Dim Power Supply with WD App Dongle  |



# MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

| DIMMING PROTOCOL  | INDOOR  |
|---|---|
|   | MICRO 5-DW Warm Dim Applications  |
| Phase   | QZ-DW   |
| 0-10V   | QT-CAB-eLED+WD<br>QT-CAB-eLED+WD-AWN<br>QTM-eLED+WD<br>QTM-eLED+WD-AWN<br>QZ-DW                               |
| Lutron Athena   | QT-CAB-eLED+DALI-DT8-AWN<br>QT-CAB-eLED+WD-AWN<br>QTM-eLED+DALI-DT8-AWN<br>QTM-eLED+WD-AWN                    |
| DMX<br>LED wattage must<br>be doubled<br>for DW-HE products                           | QZ-DMX  |
| DALI-2: DT6<br>LED wattage must<br>be doubled<br>for DW-HE products<br>except for AWN | QT-CAB-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6   |
| DALI-2: DT8<br>LED wattage must<br>be doubled<br>for DW-HE products<br>except for AWN | QT-CAB-eLED+DALI-DT8<br>QT-CAB-eLED+DALI-DT8-AWN<br>QTM-eLED+DALI-DT8<br>QTM-eLED+DALI-DT8-AWN<br>QZ-DALI-DT8 |
| SCENE App Dimmed  | Non-Dim Power Supply with WD App Dongle   |

## COMPATIBLE MOUNTING ACCESSORIES



## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature  
junction box, DRY/DMP  
(WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES



Wi-Fi or Bluetooth  
Connectivity



## MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

---

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage