





MICRO 5 ALTA-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

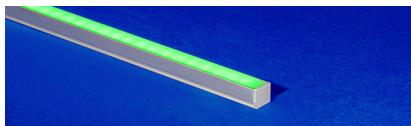

- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations
- 55% smaller than ESSENTIALS-TALO
- Delivers equivalent efficacy as standard size fixtures
- Ideal for surface mounted or recessed installations that call for low-profile light in small areas
- Mounting options include stainless steel or magnet clip, making installation and repositioning effortless
- Red, Green, and Blue LED allows for color changing applications

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS
ALTA-03-RGB	4.0	RGB	ENC	

ADDITIONAL INFORMATION REQUIRED TO ORDER

6 WIRE INPUT/OUTPUT	7 CONNECTOR/WIRE IN	8 CONNECTOR/WIRE OUT	9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/OPTIMAL

Sample Part Number: ALTA-03-RGB-4.0-RGB-DRY-TL-S1-BW-CLS-WH-CL2-SST-ST-48"-E

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 LENS
ALTA-03-RGB See following pages for compatible power supplies.	4.0 4.0W/ft	RGB	ENC	IP67 CL TL Clear Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

6 WIRE INPUT/OUTPUT	7 CONNECTOR/WIRE IN	8 CONNECTOR/WIRE OUT
SINGLE (Input only) S1 End Feed S2 Bottom Feed For continuous mounting, consider bottom feed.	BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	CLS Closed End (No feed)
PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed For continuous mounting, consider bottom feed.	BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/OPTIMAL
WH White BK Black	CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	SST MG Stainless Steel Magnet	ST Satin BK Black CU Custom Custom finishes require a longer lead time, consult factory	Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".	E Exact specified length O Optimal illumination


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



MICRO 5 ALTA-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

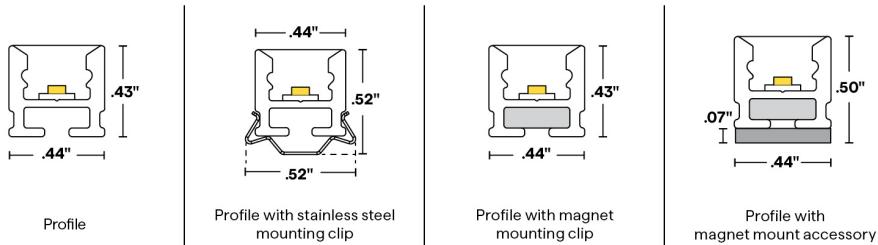

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]

Tested with ALTA-03-RGB-4.0-RGB-ENC

	Red		Green		Blue		All
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT
CL	31	630	96	524	28	470	139
TL	24	630	75	523	22	470	109

5 DIODE VISIBILITY




ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



ENC/CL in green

TEMPERATURE RATINGS

	4.0 W/FT	
	Min	Max
Ambient Operating Temp - Recessed	**	**
Ambient Operating Temp - Surface	-4°F	115°F




MICRO 5 ALTA-ENCAPSULATED (03) RGB


24VDC Linear Fixtures - Surface & Recessed

6 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)




CONFIGURATION OPTIONS

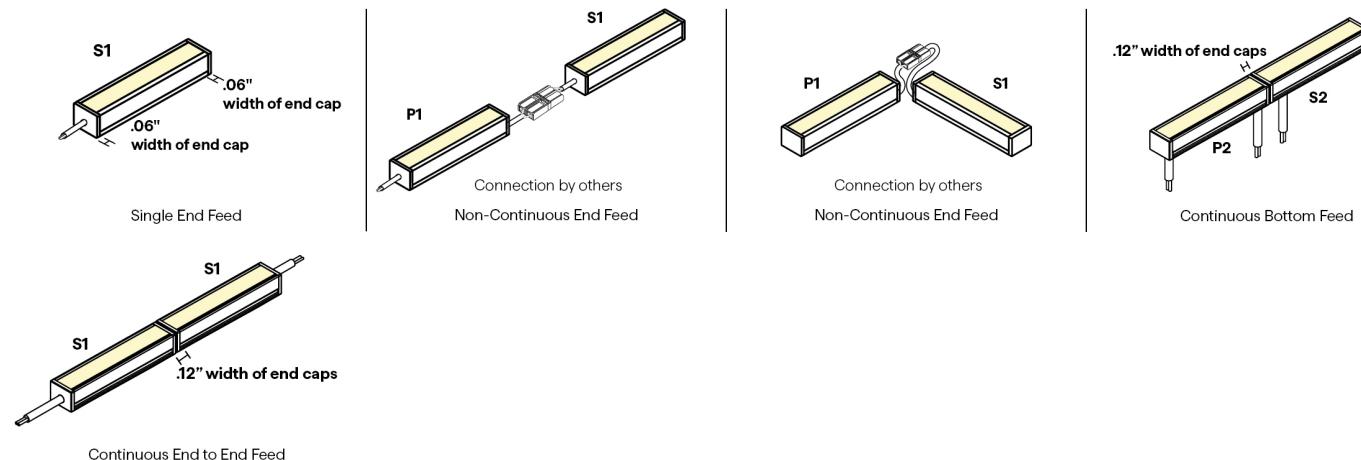

7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

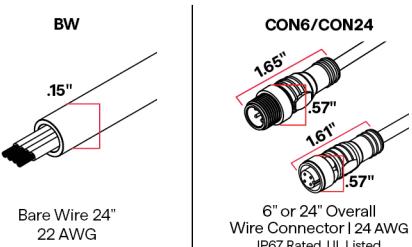

9 WIRE COLOR







MICRO 5 ALTA-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

11 MOUNTING

SST	MG	MMA-03
 1.25" x .52" x .21"	 0.95" x 0.28" x 0.08"	 .07" x 8" x 4.7"
SST Stainless Steel Clip	MG Magnet Clip	MMA-03 Magnet Mount Accessory for MG-03
2 pieces of hardware provided for 4' or less; 4 pieces provided for greater than 4'	One MG provided per foot To order separately use MG-03	96" lengths Sold separately, to order use MMA-03
To order separately use SST-08 Each clip comes with a #4 x 5/8" Flat Head SS		Each bracket comes with 2 #6 x 5/8" Flat Head SS per foot Required when mounting to a non-magnetic surface

12 FINISH



Satin

Black


Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

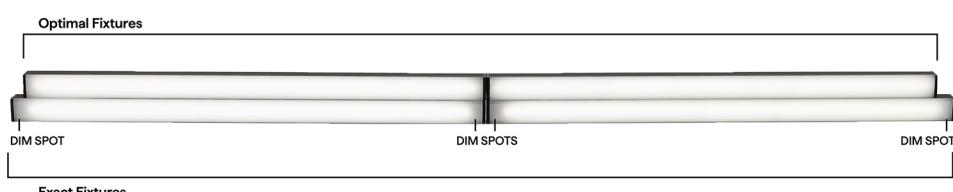



MICRO 5 ALTA-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

RGB ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH


Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.48"		10.83"	
13"	12.48"		12.83"	
14"	12.48"		12.83"	
15"	14.48"		14.83"	
16"	14.48"		14.83"	
17"	16.48"		16.83"	
18"	16.48"		16.83"	
19"	18.48"		18.83"	
20"	18.48"		18.83"	
21"	20.48"		20.83"	
22"	20.48"		20.83"	
23"	22.48"		22.83"	
24"	22.48"		22.83"	
36"	34.48"		34.83"	
48"	46.48"		46.83"	
60"	58.48"		58.83"	
72"	70.48"		70.83"	
84"	82.48"		82.83"	
96"	94.48"		94.83"	

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

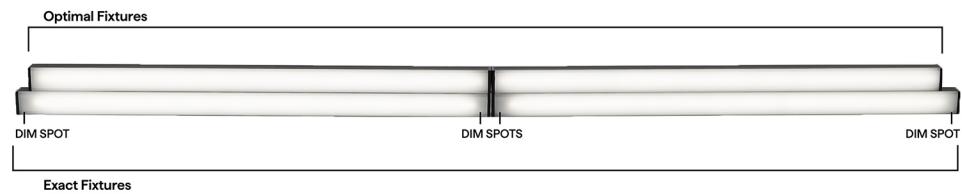

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-RGB	MICRO 5-RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	




MICRO 5 ALTA-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-RGB	MICRO 5-RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8

COMPATIBLE MOUNTING ACCESSORIES

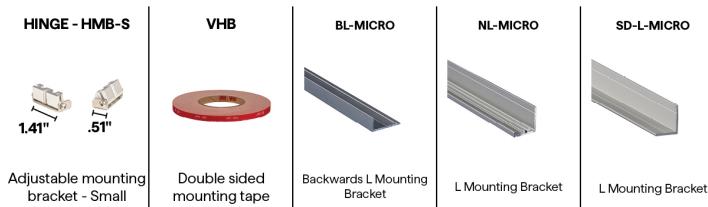

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS



Read and write DMX addresses and adjust voltage