




MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed






MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

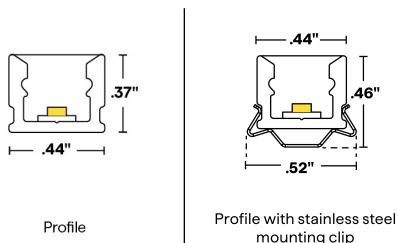

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with ATOM-03-DW-2.0-**-ENC

	2400K		2700K		3000K		4000K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
TL	79	93	86	93	83	95	91	97

5 DIODE VISIBILITY




ENC/TL - Translucent encapsulation

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

2W/ft



ENC/CL at 3000K

TEMPERATURE RATINGS

	DW 2.0 W/FT		DW 4.0 W/FT	
QTL power supply other than DALI, DMX	DALI, DMX, or non-QTL power supply			
	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	115°F




MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

6 WIRE INPUT/OUTPUT


SINGLE (Input only)

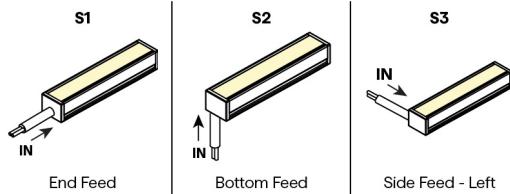

PASS THROUGH (Input/Output)

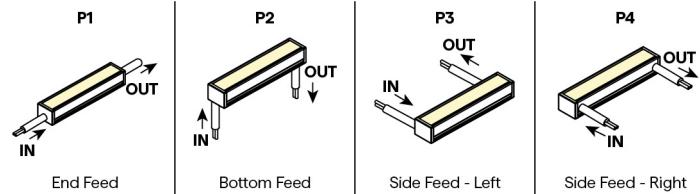


CONFIGURATION OPTIONS

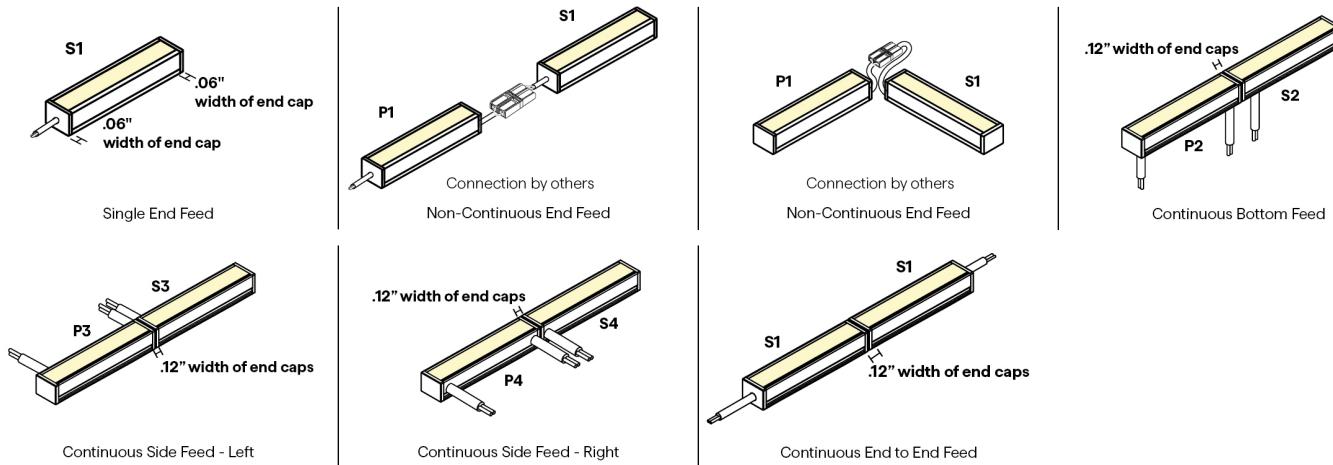

7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

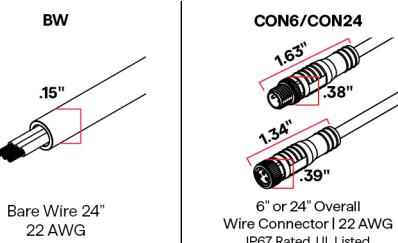

9 WIRE COLOR






MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

11 MOUNTING

SST



Stainless Steel Clip

2 pieces of hardware provided for 4' or less; 4 pieces provided for greater than 4'

To order separately use
SST-08

Each clip comes with a #4 x 5/8" Flat Head SS

12 FINISH




Satin

Black

Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

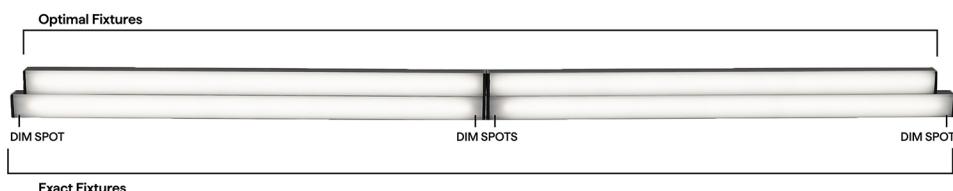



MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DW ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2 & S3 & S4				P1 & P2 & P3 & P4			
	S1 End Feed	S2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P1 End Feed	P2 Bottom Feed	P3 Side Feed - Left	P4 Side Feed - Right
12"				10.38"				10.63"
13"				12.38"				12.63"
14"				12.38"				12.63"
15"				14.38"				14.63"
16"				14.38"				14.63"
17"				16.38"				16.63"
18"				16.38"				16.63"
19"				18.38"				18.63"
20"				18.38"				18.63"
21"				20.38"				20.63"
22"				20.38"				20.63"
23"				22.38"				22.63"
24"				22.38"				22.63"
36"				34.38"				34.63"
48"				46.38"				46.63"
60"				58.38"				58.63"
72"				70.38"				70.63"
84"				82.38"				82.63"
96"				94.38"				94.63"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has $+/- 5\%$ tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-DW Tunable Applications	MICRO 5-DW Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	




MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-DW Tunable Applications	MICRO 5-DW Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products		Q-SET-QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

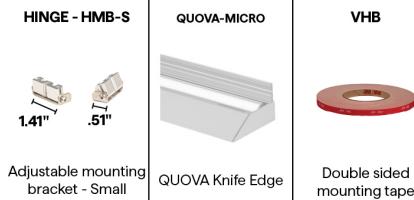

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES





MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage