





BL-MICRO

MICRO 5 BACKWARDS L BRACKET - ALUMINUM EXTRUSION

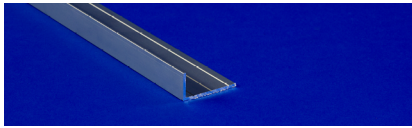

- Backwards L bracket with no reveal, creating the least amount of cutoff
- Surface mount from the bottom, ideal for illuminating pre-existing cove applications
- Mounts the MICRO 5 family of fixtures, LED light engines, and SHIELD
- Paintable finish
- Intended for indoor use only
- Mounting clips conveniently preinstalled for hassle-free installation
- Durable anodized aluminum

1	2	3	4	5	6	7	8	9	10	11	12	13	14
PRODUCT	WATTS/FT	CCT	RATED	LENS	WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
BL-MICRO													

Sample Part Number: **BL-MICRO-ST-SST-08-48"**

1	2	3	4	5
PRODUCT	WATTS/FT	CCT	RATED	LENS
BL-MICRO				

6	7	8
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT

9	10	11	12	13	14
WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
Mounting clips preinstalled See MOUNTING COMPATIBILITY CHART for more information	ST Satin BK Black	1" increments from 2" - 98.43" Tolerance +0.0/-0.5" Light engine ordered separately			

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Surface mount







BL-MICRO

MICRO 5 BACKWARDS L BRACKET - ALUMINUM EXTRUSION


1

PRODUCT - DIMENSIONS



PHOTOMETRIC PERFORMANCE

Tested with SW24/4.0 at 3000K

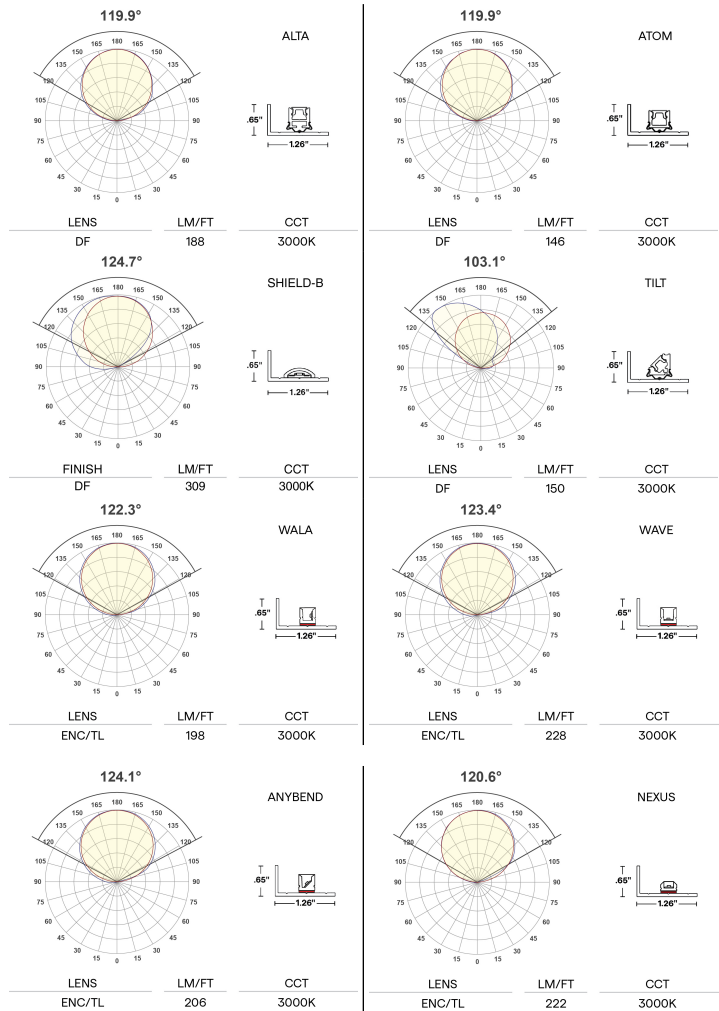




BL-MICRO

MICRO 5 BACKWARDS L BRACKET - ALUMINUM EXTRUSION

12 FINISH



Satin

Black