




NL-MICRO
MICRO 5 L BRACKET - ALUMINUM
EXTRUSION

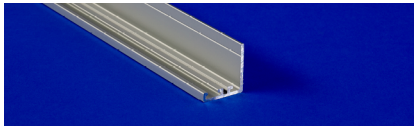

- L bracket with no reveal, creating the least amount of cutoff
- Surface mounts from the side, best for wall applications
- Mounts the MICRO 5 family of fixtures
- Paintable finish
- Intended for indoor use only
- Screw mounting track for field installation of fixtures
- Inline bracket slot for seamless run connections
- Durable anodized aluminum

1	2	3	4	5	6	7	8	9	10	11	12	13	14
PRODUCT	WATTS/FT	CCT	RATED	LENS	WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
NL-MICRO													

Sample Part Number: NL-MICRO-ST-48"

1

PRODUCT

NL-MICRO

2

WATTS/FT

3

CCT

4

RATED

5

LENS

6

WIRE INPUT/OUTPUT

7

CONNECTOR/WIRE IN

8

CONNECTOR/WIRE OUT

9

WIRE COLOR

ST Satin
BK Black

10

WIRE TYPE

1" increments from
2" - 98.43"
Tolerance
+0.0"/-0.5"
Light engine
ordered separately

11

MOUNTING

12

FINISH

13

LENGTH (IN)

14

EXACT/OPTIMAL





Field modifications must comply with QTL's installation methods otherwise warranty is null & void | surface mount



NL-MICRO


MICRO 5 L BRACKET - ALUMINUM EXTRUSION

1 PRODUCT - DIMENSIONS



PHOTOMETRIC PERFORMANCE

Order separately | Tested with SW24/5.0 at 3000K

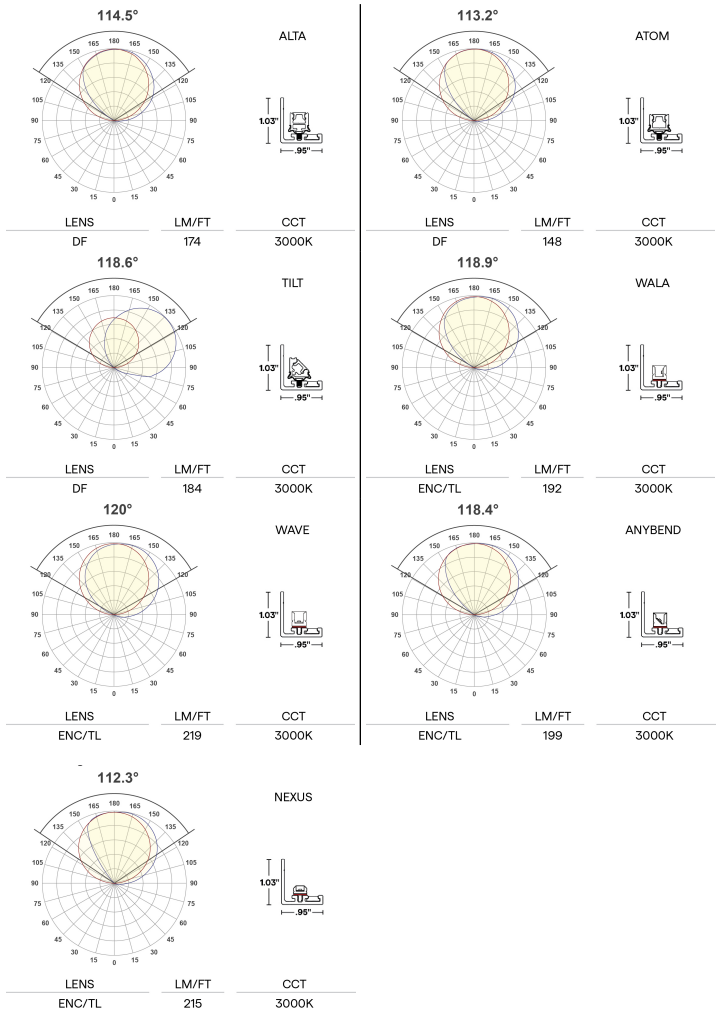




NL-MICRO

MICRO 5 L BRACKET - ALUMINUM EXTRUSION

12 FINISH



Satin

Black