





SD-L-MICRO
MICRO 5 L BRACKET - ALUMINUM
EXTRUSION

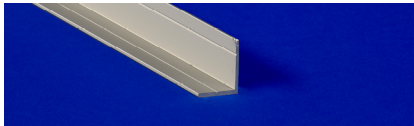

- L bracket with no reveal, creating the least amount of cutoff
- Surface mounts from the side, best for wall applications
- Mounts the MICRO 5 family of fixtures, LED light engines, and SHIELD
- Paintable finish
- Intended for indoor use only
- Mounting clips conveniently preinstalled for hassle-free installation
- Durable anodized aluminum

1	2	3	4	5	6	7	8	9	10	11	12	13	14
PRODUCT	WATTS/FT	CCT	RATED	LENS	WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
SD-L-MICRO													

Sample Part Number: SD-L-MICRO-ST-SST-08-48"

1

PRODUCT

SD-L-MICRO

2

WATTS/FT

3

CCT

4

RATED

5

LENS

6

WIRE INPUT/OUTPUT

7

CONNECTOR/WIRE IN

8

CONNECTOR/WIRE OUT

9

WIRE COLOR

Mounting clips preinstalled
See MOUNTING COMPATIBILITY CHART for more information

10

WIRE TYPE

11

MOUNTING

ST Satin
BK Black

1" increments from 2" - 98.43"
Tolerance +0.0/-0.5"
Light engine ordered separately

12

FINISH

13

LENGTH (IN)

14

EXACT/OPTIMAL






Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Surface mount



SD-L-MICRO


MICRO 5 L BRACKET - ALUMINUM EXTRUSION

1 PRODUCT - DIMENSIONS



PHOTOMETRIC PERFORMANCE

Tested with SW24/4.0 at 3000K

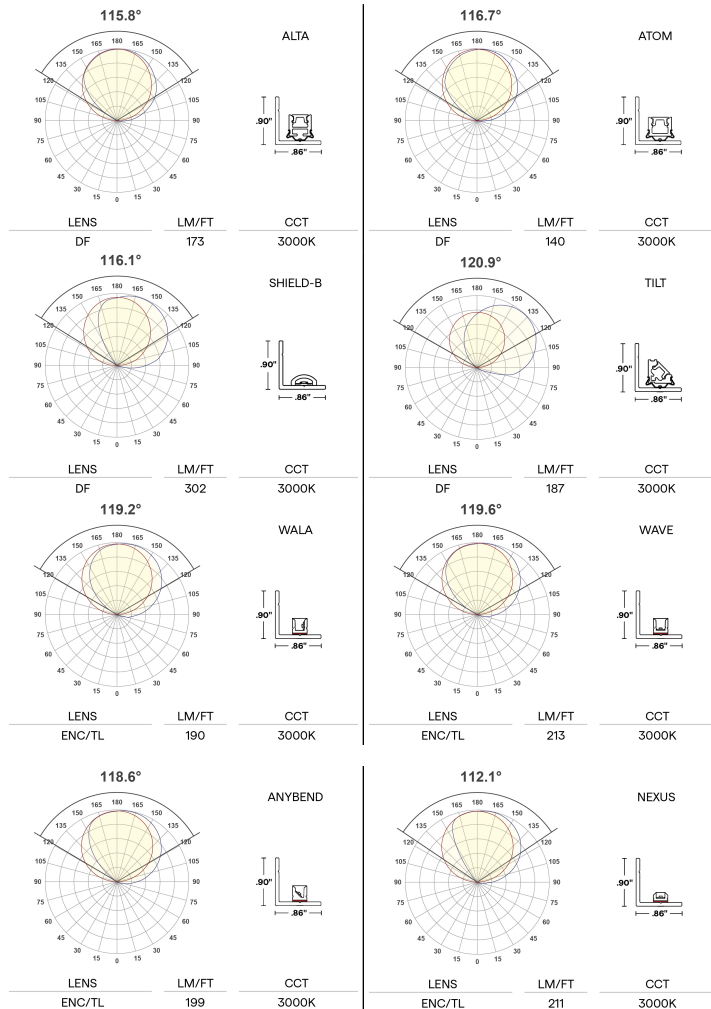




SD-L-MICRO

MICRO 5 L BRACKET - ALUMINUM EXTRUSION

12 FINISH



Satin

Black