



MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed



2.08"
.33" .81"
.46"

- MICRO 5 Series linear LED fixture designed to provide superior light performance and uniformity with discreet integration into drywall
- Two-piece mud-in fixture
- Suitable for indoor and outdoor locations
- 48% smaller than QTL's standard size extrusion (MDIN)
- Delivers equivalent efficacy as standard size fixtures
- Once installed, its wings are covered with tape and compound to create a seamless look
- Red, Green, and Blue LED allows for color changing applications

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS
SLITE-03-RGB	4.0	RGB	ENC	

ADDITIONAL INFORMATION REQUIRED TO ORDER

6 WIRE INPUT/ OUTPUT	7 CONNECTOR/ WIRE IN	8 CONNECTOR/ WIRE OUT	9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/ OPTIMAL
						SC		

Sample Part Number: **SLITE-03-RGB-4.0-RGB-ENC-TL-S1-BW-CLS-WH-CL2-SC-ST-48"-E**

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 LENS
SLITE-03-RGB See following pages for compatible power supplies.	4.0 4.0W/ft	RGB	ENC IP67	CL Clear TL Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

6 WIRE INPUT/OUTPUT	7 CONNECTOR/WIRE IN	8 CONNECTOR/WIRE OUT
SINGLE (Input only) S1 End Feed S2 Bottom Feed For continuous mounting, consider bottom feed.	BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	CLS Closed End (No feed)
PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed For continuous mounting, consider bottom feed.	BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/OPTIMAL
WH White BK Black	CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	SC Screw	ST Satin CU Custom Custom finishes require a longer lead time, consult factory	Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".	E Exact specified length O Optimal illumination


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

1 PRODUCT - DIMENSIONS

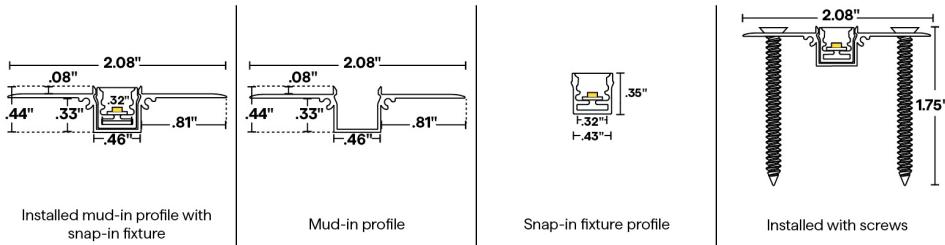

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with SLITE-03-RGB-4.0-RGB-ENC

	Red		Green		Blue		All
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT
CL	23	628	73	524	22	469	106
TL	19	629	58	524	17	468	84

5 DIODE VISIBILITY




ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

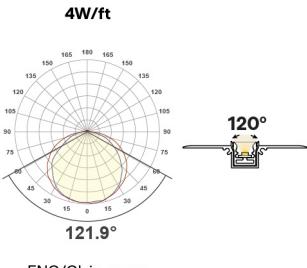

ENC/CL in green

TEMPERATURE RATINGS

	4.0 W/FT	
	Min	Max
Ambient Operating Temp - Recessed	-4°F	100°F




MICRO 5 SLITE-ENCAPSULATED (03) RGB


24VDC Linear Fixtures - Recessed

6 WIRE INPUT/OUTPUT






SINGLE (Input only)

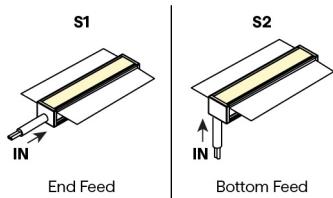

PASS THROUGH (Input/Output)

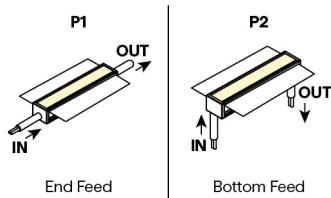


CONFIGURATION OPTIONS

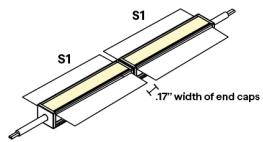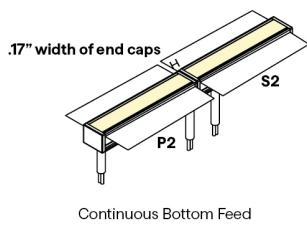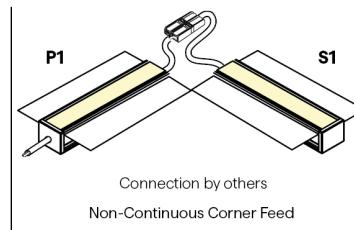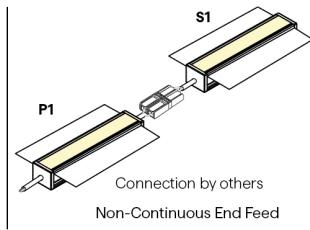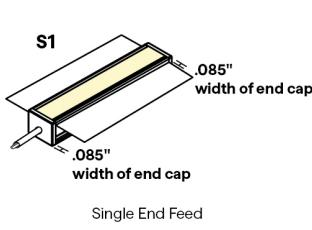

Continuous End to End Feed

7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

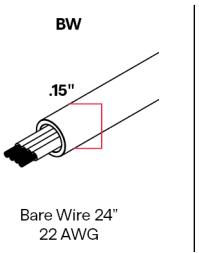

9 WIRE COLOR



White

Black




MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

11 MOUNTING

SC



Screw

#8 Flat head screw

12 FINISH



Satin


Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

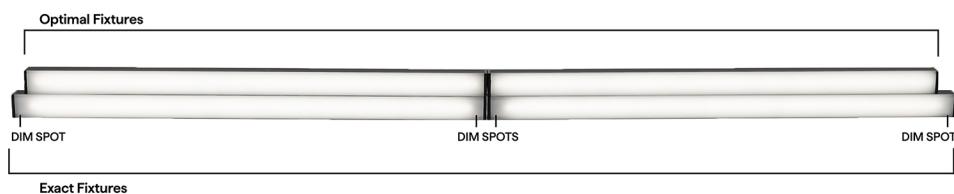



MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

RGB ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH


Requested Nominal Length	S1 S1	S2 S2	P1 P1	P2 P2
12"	10.48"	10.61"	10.83"	11.08"
13"	12.48"	12.61"	12.83"	11.08"
14"	12.48"	12.61"	12.83"	13.08"
15"	14.48"	14.61"	14.83"	13.08"
16"	14.48"	14.61"	14.83"	15.08"
17"	16.48"	16.61"	16.83"	15.08"
18"	16.48"	16.61"	16.83"	17.08"
19"	18.48"	18.61"	18.83"	17.08"
20"	18.48"	18.61"	18.83"	19.08"
21"	20.48"	20.61"	20.83"	19.08"
22"	20.48"	20.61"	20.83"	21.08"
23"	22.48"	22.61"	22.83"	21.08"
24"	22.48"	22.61"	22.83"	23.08"
36"	34.48"	34.61"	34.83"	35.08"
48"	46.48"	46.61"	46.83"	47.08"
60"	58.48"	58.61"	58.83"	59.08"
72"	70.48"	70.61"	70.83"	71.08"
84"	82.48"	82.61"	82.83"	83.08"
96"	94.48"	94.61"	94.83"	95.08"

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

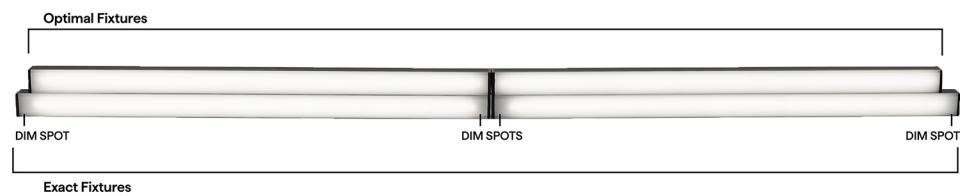

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-RGB	MICRO 5-RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	




MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-RGB	MICRO 5-RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature
junction box, DRY/DMP
(WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage