



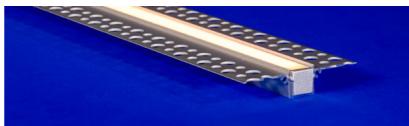

# MICRO 5 SLITE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed



2.08"  
.33" .81"  
.46"

- MICRO 5 Series linear LED fixture designed to provide superior light performance and uniformity with discreet integration into drywall
- Two-piece mud-in fixture
- 48% smaller than QTL's standard size extrusion (MDIN)
- Delivers equivalent efficacy as standard size fixtures
- Once installed, its wings are covered with tape and compound to create a seamless look
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 2.0 watts or less per foot per NEC regulations
- Consult factory for field assembly options

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS
				DF

## ADDITIONAL INFORMATION REQUIRED TO ORDER

6 WIRE INPUT/ OUTPUT	7 CONNECTOR/ WIRE IN	8 CONNECTOR/ WIRE OUT	9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/ OPTIMAL
					SC			

Sample Part Number: **SLITE-01-SW-4.0-30-DRY-DF-S1-BW-CLS-WH-CL2-SC-ST-48"-E**

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 LENS
<b>SLITE-01-SW</b> <b>SLITE-01-SW-USA</b>	1.0 2.0 4.0	1.0W/ft 2.0W/ft 4.0W/ft		
Select USA option for BAA and BABA projects. Only DRY ratings apply.				
See following pages for compatible power supplies.				
	1.0 2.0 4.0	1.0W/ft 2.0W/ft 4.0W/ft		
			DRY	IP20
		20 22 24 27 30 35 40		DF Diffused
		2400K 2200K 2400K 2700K 3000K 3500K 4000K		For representation of LED visibility, see Diode Visibility section on following pages.
		24 27 30 35 40	DMP	IP54
		2400K 2700K 3000K 3500K 4000K		

6 WIRE INPUT/OUTPUT	7 CONNECTOR/WIRE IN	8 CONNECTOR/WIRE OUT
<b>SINGLE (Input only)</b> <b>S1</b> End Feed <b>S2</b> Bottom Feed	<b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>CLS</b> Closed End (No feed)
For continuous mounting, consider bottom feed.	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	

6 WIRE INPUT/OUTPUT	7 CONNECTOR/WIRE IN	8 CONNECTOR/WIRE OUT
<b>PASS THROUGH (Input/output)</b> <b>P1</b> End Feed <b>P2</b> Bottom Feed	<b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"
For continuous mounting, consider bottom feed.	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/OPTIMAL
WH White BK Black N/A For Barrel	CL2 Class 2 CL2P Plenum Rated N/A For Barrel	SC Screw	ST Satin CU Custom	Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".	<b>E</b> Exact specified length <b>O</b> Optimal illumination
	CL2P only available with bare wire leads (BW)		Custom finishes require a longer lead time, consult factory		Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Title 24 – JA8-2019 Static White Strip: All wattages, CCT and IP



# MICRO 5 SLITE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

## 1 PRODUCT - DIMENSIONS

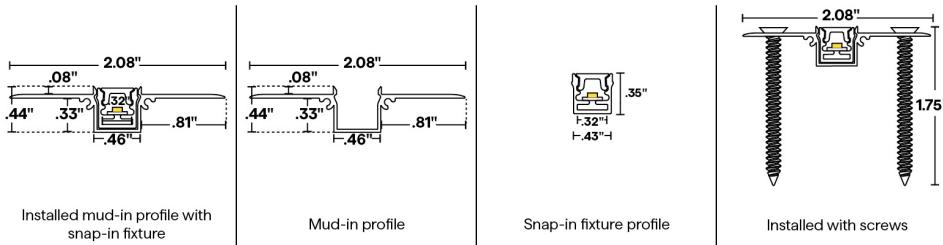

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with SLITE-01-SW-\*\*-30-DRY

	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
DF	47	98	90	98	181	98

## 5 DIODE VISIBILITY




DF - Diffused lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

4W/ft

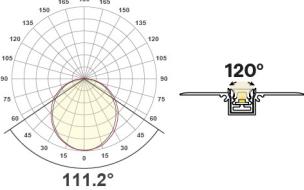

DF lens at 3000K

## TEMPERATURE RATINGS

		1.0 W/FT		2.0 W/FT		4.0 W/FT	
		Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	135°F	-4°F	130°F	-4°F	110°F
DMP	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	125°F	-4°F	105°F




## MICRO 5 SLITE-FLAT (01) STATIC WHITE


24VDC Linear Fixtures - Recessed

### 6 WIRE INPUT/OUTPUT






SINGLE (Input only)

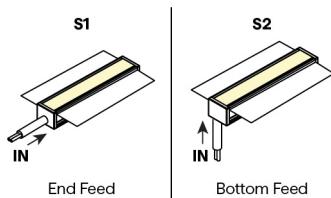

PASS THROUGH (Input/Output)

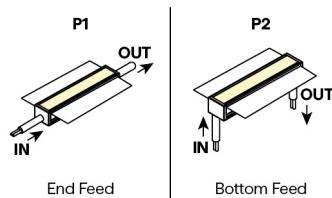


### CONFIGURATION OPTIONS

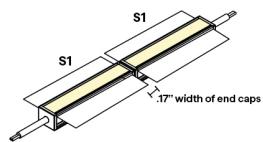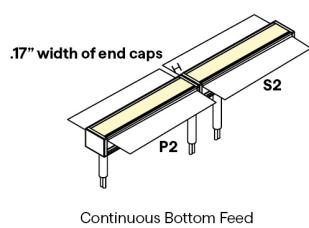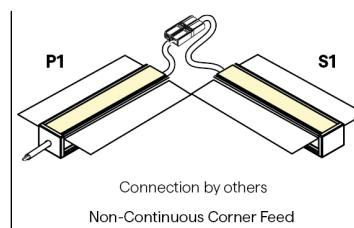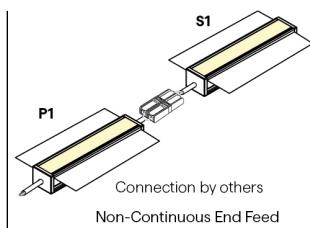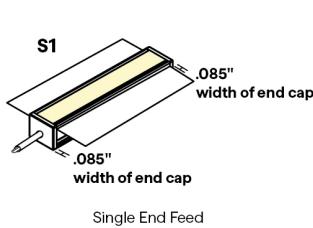


Continuous End to End Feed

### 7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out



Bare Wire 24"  
22 AWG



Barrel 6" - DRY/DMP  
22 AWG



6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

### 9 WIRE COLOR



White

Black




## MICRO 5 SLITE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

### 11 MOUNTING

SC



Screw

#8 Flat head screw

### 12 FINISH



Satin

Custom finishes require a longer lead time, consult factory

### 14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



### SW DRY DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".



# MICRO 5 SLITE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

## EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

## OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	End Feed	Bottom Feed	End Feed	Bottom Feed
12"	11.38"			11.63"
13"	12.38"			12.63"
14"	13.38"			13.63"
15"	14.38"			14.63"
16"	15.38"			15.63"
17"	16.38"			16.63"
18"	17.38"			17.63"
19"	18.38"			18.63"
20"	19.38"			19.63"
21"	20.38"			20.63"
22"	21.38"			21.63"
23"	22.38"			22.63"
24"	23.38"			23.63"
36"	35.38"			35.63"
48"	47.38"			47.63"
60"	59.38"			59.63"
72"	71.38"			71.63"
84"	83.38"			83.63"
96"	95.38"			95.63"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	MICRO 5-SW	
Dim to Black		Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1
0.1%		QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%		QTM-eLED(E) QZ-DALI-DT6
10%		Non-Dim Power Supply with SW App Dongle




# MICRO 5 SLITE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-SW
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle

## COMPATIBLE WIRING ACCESSORIES

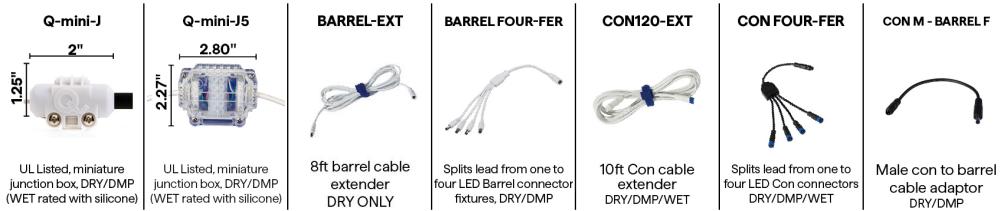

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



Wi-Fi or Bluetooth  
Connectivity



## MICRO 5 SLITE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

---

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage