




## **OPTI-FLAT (01) FOR TUNABLE APPLICATIONS**

## 24VDC Linear Fixtures - Surface & Recessed



ILD AMERICA,  
Y AMERICA  
OMPLIANT



- Choose from diffused, polar or frosted lens options for varying diode visibility and beam cutoff
  - Delivers smooth and consistent light to highlight architectural features and surfaces
  - Ideal for surface-mounted installations
  - Integrated metal end caps combined with an extruded aluminum housing give this fixture a polished modern look
  - When using DALI and DMX power supplies, LED wattage must be doubled


Sample Part Number: **OP1DW-2.5HE-20/30-DRY-DF-P1-CON6-CON6-WH-CL2-CC-WH-48"-E**



# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

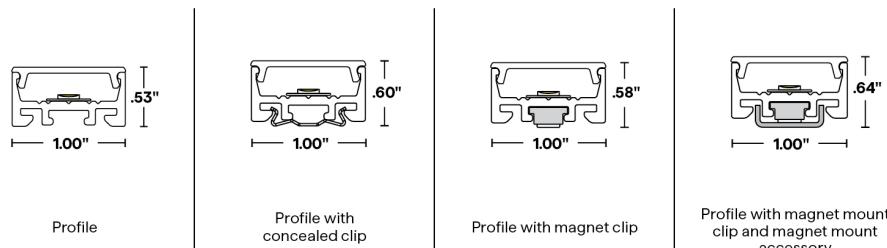

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with OP1DW-2.5HE-\*\*-DRY-STD

	3000K	
	LM/FT	CRI
FR	219	98
PR	206	98
DF	182	98

## TEMPERATURE RATINGS


		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	135°F	-4°F	140°F	-4°F	125°F	-4°F	130°F	-4°F	115°F

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

2.5HEW/ft

Frosted Lens

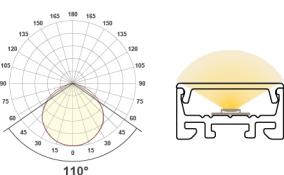




# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## 6 WIRE INPUT/OUTPUT


SINGLE (Input only)

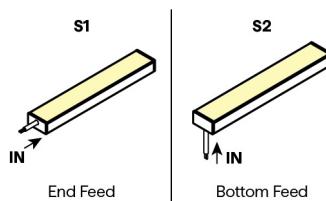


PASS THROUGH (Input/Output)

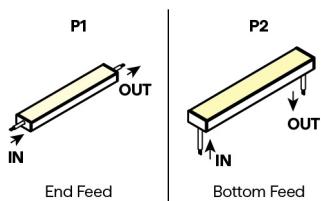


## CONFIGURATION OPTIONS

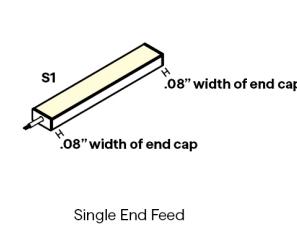


Single End Feed

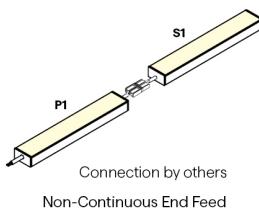


Non-Continuous End Feed

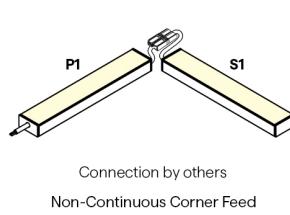

Non-Continuous Corner Feed

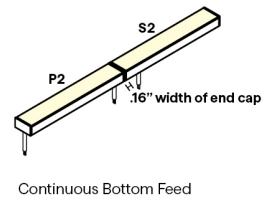


Continuous Bottom Feed

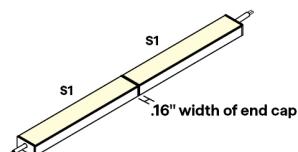

Single End Feed

## 7 / 8 CONNECTOR/WIRE - IN/OUT



Bare Wire 36"  
22 AWG



6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

## 9 WIRE COLOR



White


Black



## OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

### 11 MOUNTING

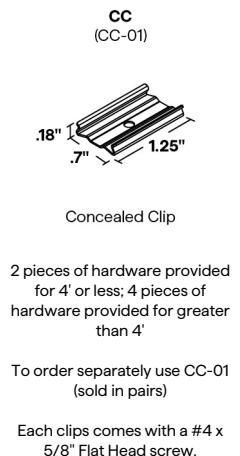


Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)


Each clip comes with a #4 x 5/8" Flat Head screw.

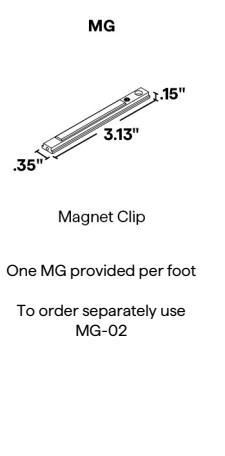

Magnet Clip

One MG provided per foot

To order separately use MG-02

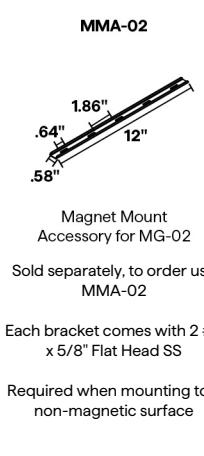


Magnet Mount Accessory for MG-02

Sold separately, to order use MMA-02

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

### 12 FINISH



Satin


Black

White

Custom finishes require a longer lead time, consult factory

### 14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

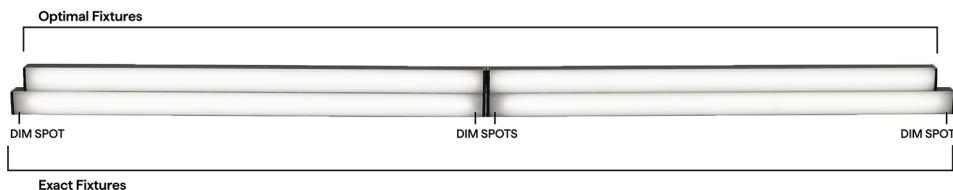



# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## DW-HE DRY DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.51"	10.86"	10.86"	10.86"
13"	12.51"	12.86"	12.86"	12.86"
14"	12.51"	12.86"	12.86"	12.86"
15"	14.51"	14.86"	14.86"	14.86"
16"	14.51"	14.86"	14.86"	14.86"
17"	16.51"	16.86"	16.86"	16.86"
18"	16.51"	16.86"	16.86"	16.86"
19"	18.51"	18.86"	18.86"	18.86"
20"	18.51"	18.86"	18.86"	18.86"
21"	20.51"	20.86"	20.86"	20.86"
22"	20.51"	20.86"	20.86"	20.86"
23"	22.51"	22.86"	22.86"	22.86"
24"	22.51"	22.86"	22.86"	22.86"
36"	34.51"	34.86"	34.86"	34.86"
48"	46.51"	46.86"	46.86"	46.86"
60"	58.51"	58.86"	58.86"	58.86"
72"	70.51"	70.86"	70.86"	70.86"
84"	82.51"	82.86"	82.86"	82.86"
96"	94.51"	94.86"	94.86"	94.86"

## DW-HE WET LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.66"	11.06"	11.06"	11.06"
13"	12.66"	13.06"	13.06"	13.06"
14"	12.66"	13.06"	13.06"	13.06"
15"	14.66"	15.06"	15.06"	15.06"
16"	14.66"	15.06"	15.06"	15.06"
17"	16.66"	17.06"	17.06"	17.06"
18"	16.66"	17.06"	17.06"	17.06"
19"	18.66"	19.06"	19.06"	19.06"
20"	18.66"	19.06"	19.06"	19.06"
21"	20.66"	21.06"	21.06"	21.06"
22"	20.66"	21.06"	21.06"	21.06"
23"	22.66"	23.06"	23.06"	23.06"
24"	22.66"	23.06"	23.06"	23.06"
36"	34.66"	35.06"	35.06"	35.06"
48"	46.66"	47.06"	47.06"	47.06"
60"	58.66"	59.06"	59.06"	59.06"
72"	70.66"	71.06"	71.06"	71.06"
84"	82.66"	83.06"	83.06"	83.06"
96"	94.66"	95.06"	95.06"	95.06"



# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	



# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b> 1.41" 1.71"	<b>HINGE - HMB-L</b> 1.46" 1.29"	<b>HINGE - HMB-XL</b> 1.46" 4"	<b>Q-PIVOT</b> 75° 1.03"	<b>Q-ANGLE</b> 2.23" 1.38"	<b>QUOVA-STANDARD</b> 	<b>NJ-LARGE</b> 	<b>NU-LARGE</b> 	<b>SD-J-LARGE</b> 	<b>BL-LARGE</b> 
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	QUOVA Knife Edge	J Mounting Bracket	U Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket
<b>NL-LARGE</b> 	<b>SD-L-LARGE</b> 	<b>MMA-02</b> .58"							
L Mounting Bracket	L Mounting Bracket	Magnet Mount Accessory of MG-02							

## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES



Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS

### NFC APP



Read and write DMX addresses and adjust voltage