





OPTI-OPTICS (02) STATIC WHITE HIGH EFFICACY

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile




Profile with concealed clip




Profile with magnet clip




Profile with magnet mount clip and magnet mount accessory




Profile with 40D lens




Profile with 60D lens




Profile with 70D lens




Profile with 90D lens




Profile with 110D lens




Profile with 155D lens



Profile with 180D lens



Profile with asymmetric lens



Profile with forward throw lens

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 for HE, L70 = 55000 for HE+]
Tested with OP2SW-**-30-DRY-STD

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		3.0HE+ W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		6.0HE+ W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
40D	156	98	179	98	281	98	338	98	561	92	331	98	415	98	692	98	764	92	906	98
60D	142	98	173	98	255	98	320	98	543	92	315	98	389	98	667	98	740	92	858	98
70D	149	98	175	98	262	98	333	98	528	92	321	98	402	98	682	98	733	92	888	98
90D	146	98	172	98	261	98	331	98	546	92	321	98	394	98	672	98	745	92	872	98
110D	142	98	161	98	249	98	306	98	534	92	308	98	372	98	603	98	730	92	835	98
155D	140	98	161	98	250	98	307	98	539	92	307	98	375	98	590	98	726	92	838	98
180D	143	98	167	98	251	98	307	98	537	92	310	98	378	98	607	98	733	92	844	98
ASYM	143	98	169	98	253	98	317	98	538	92	311	98	401	98	655	98	739	92	866	98
FT	122	98	154	98	225	98	305	98	419	92	270	98	331	98	576	98	664	92	820	98

TEMPERATURE RATINGS


		1.5 W/FT		1.5 W/FT HE		3.0 W/FT		3.0 W/FT HE		3.0 W/FT HE+		4.0 W/FT		5.0 W/FT		6.0 W/FT HE		6.0 W/FT HE+		9.0 HE	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	135°F	-4°F	135°F	-13°F	135°F	-4°F	130°F	-4°F	125°F	-4°F	125°F	-13°F	125°F	-4°F	105°F



OPTI-OPTICS (02) STATIC WHITE HIGH EFFICACY


24VDC Linear Fixtures - Surface & Recessed

5 DIODE VISIBILITY

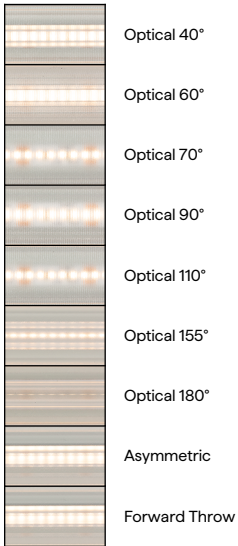

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

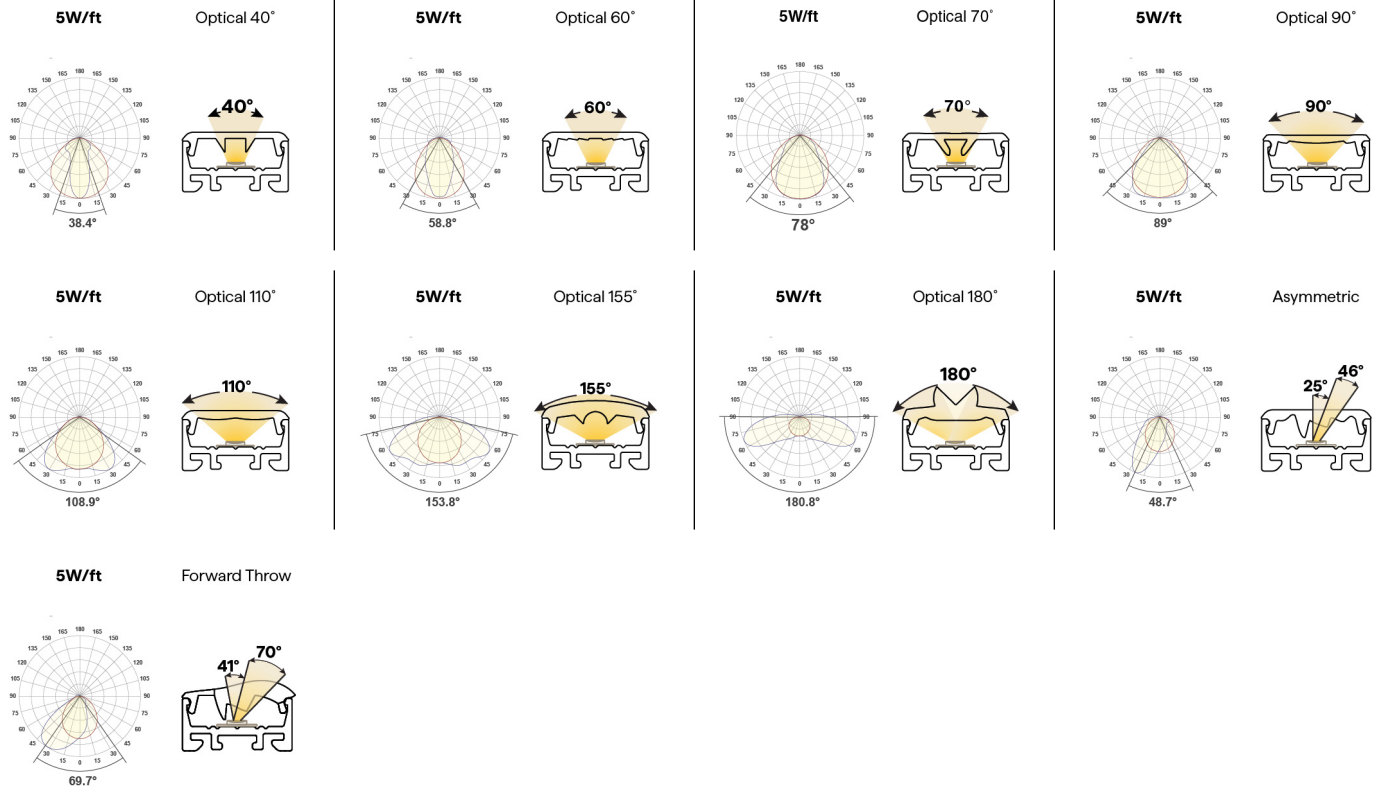




OPTI-OPTICS (02) STATIC WHITE HIGH EFFICACY


24VDC Linear Fixtures - Surface & Recessed

6 WIRE INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output)




ASYMMETRIC ONLY SINGLE (Input only)

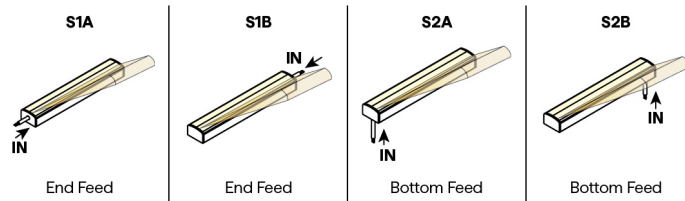

ASYMMETRIC ONLY PASS THROUGH (Input/Output)

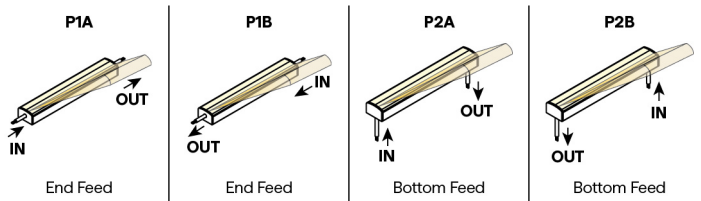

CONFIGURATION OPTIONS

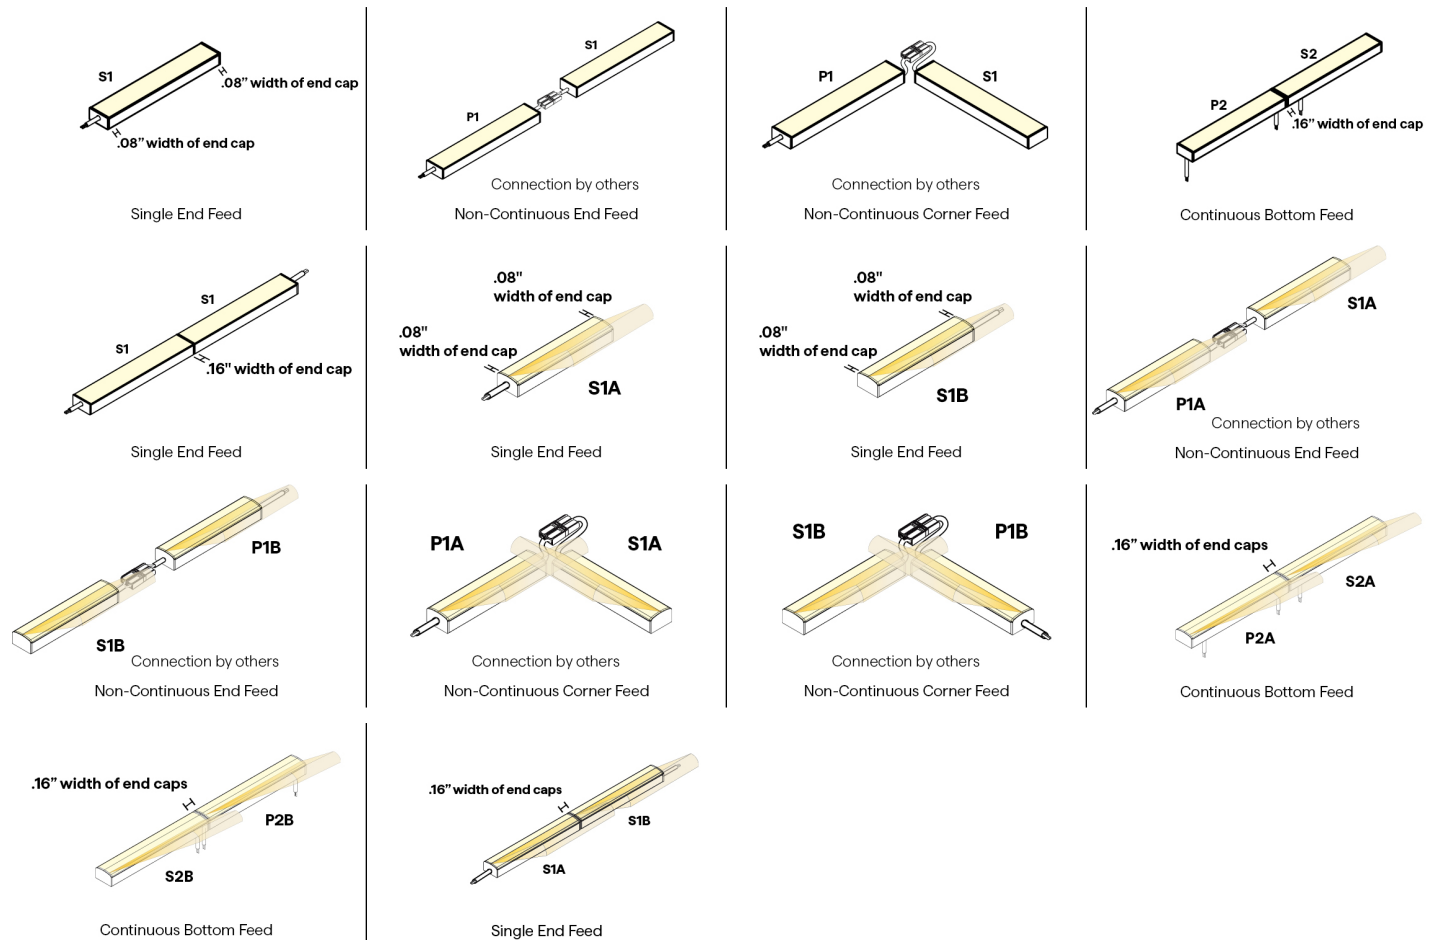





OPTI-OPTICS (02) STATIC WHITE HIGH EFFICACY

24VDC Linear Fixtures - Surface & Recessed

7 / 8 CONNECTOR/WIRE – IN/OUT



Bare Wire 36"
22 AWG




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

9 WIRE COLOR



11 MOUNTING

CC
(CC-01)



Concealed Clip

2 pieces of hardware provided
for 4' or less; 4 pieces of
hardware provided for greater
than 4'

To order separately use CC-01

Each clips comes with a #4 x
5/8" Flat Head screw.

MG




Magnet Clip

One MG provided per foot

To order separately use
MG-02

MMA-02



Magnet Mount
Accessory for MG-02

Sold separately, to order use
MMA-02

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface


12 FINISH



Custom finishes require a longer
lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

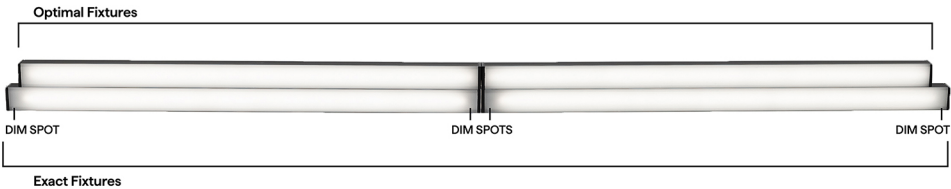



OPTI-OPTICS (02) STATIC WHITE HIGH EFFICACY

24VDC Linear Fixtures - Surface & Recessed





SW DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S1A/B & S2 & S2A/B		P1 & P1A/B & P2 & P2A/B	
				
12"	11.41"		11.66"	
13"	12.41"		12.66"	
14"	13.41"		13.66"	
15"	14.41"		14.66"	
16"	15.41"		15.66"	
17"	16.41"		16.66"	
18"	17.41"		17.66"	
19"	18.41"		18.66"	
20"	19.41"		19.66"	
21"	20.41"		20.66"	
22"	21.41"		21.66"	
23"	22.41"		22.66"	
24"	23.41"		23.66"	
36"	35.41"		35.66"	
48"	47.41"		47.66"	
60"	59.41"		59.66"	
72"	71.41"		71.66"	
84"	83.41"		83.66"	
96"	95.41"		95.66"	





SW-HE, SW-HE+ DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S1A/B & S2 & S2A/B		P1 & P1A/B & P2 & P2A/B	
				
12"	10.41"		10.66"	
13"	12.41"		12.66"	
14"	12.41"		12.66"	
15"	14.41"		14.66"	
16"	14.41"		14.66"	
17"	16.41"		16.66"	
18"	16.41"		16.66"	
19"	18.41"		18.66"	
20"	18.41"		18.66"	
21"	20.41"		20.66"	
22"	20.41"		20.66"	
23"	22.41"		22.66"	
24"	22.41"		22.66"	
36"	34.41"		34.66"	
48"	46.41"		46.66"	
60"	58.41"		58.66"	
72"	70.41"		70.66"	
84"	82.41"		82.66"	
96"	94.41"		94.66"	



OPTI-OPTICS (02) STATIC WHITE HIGH EFFICACY

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle



OPTI-OPTICS (02) STATIC WHITE HIGH EFFICACY

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)	QTM-eLED(E)
DMX	QZ-DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M

Adjustable mounting bracket - Medium

HINGE - HMB-L

Adjustable mounting bracket - Large

HINGE - HMB-XL

Adjustable mounting bracket - XLarge

Q-PIVOT

Small mounting accessory

Q-ANGLE

Adjustable mounting accessory

QUOVA-STANDARD

QUOVA Knife Edge

NJ-LARGE

J Mounting Bracket

NU-LARGE

U Mounting Bracket

SD-J-LARGE

J Mounting Bracket

BL-LARGE

Backwards L Mounting Bracket

NL-LARGE

L Mounting Bracket

SD-L-LARGE

L Mounting Bracket

MMA-02


Magnet Mount Accessory of MG-02



OPTI-OPTICS (02) STATIC WHITE HIGH EFFICACY

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

Q-mini-J  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	CON120-EXT  10ft Con cable extender DRY/DMP/WET	CON FOUR-FER  Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL F  Male con to barrel cable adaptor DRY/DMP
--	---	---	---	--

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage