





VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface &
Recessed



- Wet-rated VERSatile fixture encapsulated in polyurethane
- The polyurethane encapsulation provides optimal delivered lumens
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Optional external louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	LENS	EXTERNAL LOUVER
VERS-06-SW			ENC		

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15	16	17
WIRE IN/ OUT	CONN/ WIRE IN	CONN/ WIRE OUT	END CAP IN	END CAP OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **VERS-06-SW-5.0-30-ENC-ENC/TL-L1-BK-P1-BW-BW-STD-STD-BK-CL2-CC-BK-48"-E**

1	2	3	4	5	6
PRODUCT	WATTS/FT	CCT	RATED	LENS	EXTERNAL LOUVER
VERS-06-SW See following pages for compatible power supplies.	1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	ENC IP67	ENC/CL Encapsulated in Clear ENC/TL Encapsulated in Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.

7

WIRE IN/OUT

SINGLE (Input only)

S1

End Feed

S2

Bottom Feed

S3

Left Side Feed

S4

Right Side Feed

PASS THROUGH (Input/output)

P1

End Feed

P2

Bottom Feed

P3

Left Side Feed

P4

Right Side Feed

P2, P3, P4 options not compatible with external louver

8

CONN/WIRE IN

BW

Bare Wire (Standard 36")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9

CONN/WIRE OUT

CLS

Closed End (No feed)

BW

Bare Wire (Standard 36")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10

END CAP IN

STD

Standard

CL

Clear

STD - End cap matches fixture finish chosen

Select CL for continuous runs

11

END CAP OUT

STD

Standard

CL

Clear

STD - End cap matches fixture finish chosen

Select CL for continuous runs

12

WIRE COLOR

WH

White

BK

Black

13

WIRE TYPE

CL2

Class 2

CL2P

Plenum Rated

CL2P only available with bare wire leads (BW)

14

MOUNTING

CC

Concealed Clip

MG

Magnet

15

FINISH

ST

Satin

BK

Black

BZ

Bronze

WH

White

CU

Custom

White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory.

16

LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

17

EXACT/OPTIMAL

O

Optimal Illumination

E

Exact Specified Length

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile




Profile with concealed clip




Profile with magnetic clip



Profile with magnet mount clip & magnetic mount accessory



Profile with L1 Louver



Profile with L2 Louver

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with VERS-06-SW-**-30-ENC

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
ENC/CL	139	96	185	97	242	96	335	96	286	96	347	96	575	96
ENC/TL	125	96	154	97	204	96	283	96	273	96	307	96	490	96


5 DIODE VISIBILITY



ENC/CL - Clear encapsulation
ENC/TL - Translucent encapsulation



PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.




6 EXTERNAL LOUVER

PLASTIC


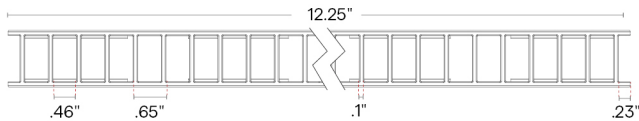


Lumen Multiplier
WH BK
0.65 0.40




Profile with plastic louver

METAL

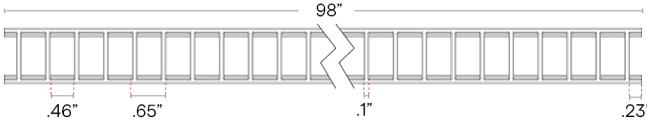

Lumen Multiplier
WH BK ST
0.67 0.40 0.62



Profile with metal louver



VERS-ENCAPSULATED (06) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


	1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	130°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	115°F	-4°F	105°F	-4°F	105°F

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

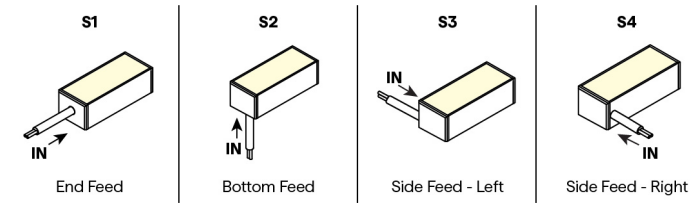

PASS THROUGH (Input/Output)

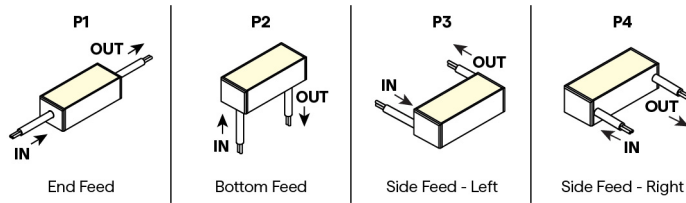

CONFIGURATION OPTIONS

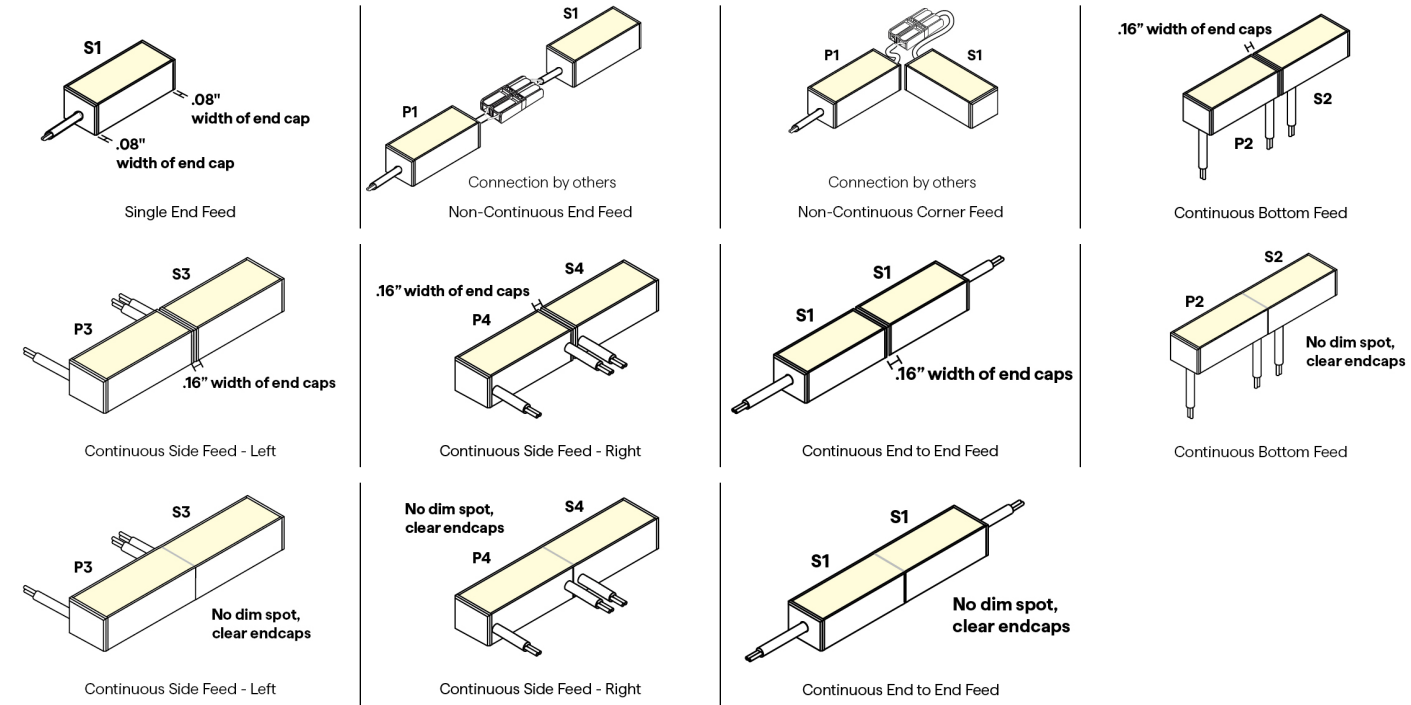




VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.



Bare Wire 36"
22 AWG


CON6/CON24



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed


10 / 11 END CAP – IN/OUT

STD



End cap matches fixture
finish chosen

CL




Clear end cap

12 WIRE COLOR



14 MOUNTING

CC
(CC-01)




Concealed Clip

2 pieces of hardware provided for 4'
or less; 4 pieces of hardware
provided for greater than 4'

To order separately use CC-01

Each clips comes with a #4 x 5/8"
Flat Head screw.

CC
(CC-02)



Louver Concealed Clip
Required if L1 or L2 Louver is selected

2 pieces of hardware provided for 4'
or less; 4 pieces of hardware
provided for greater than 4'

To order separately use CC-02

Each clips comes with a #4 x 5/8"
Flat Head screw.

MG




Magnet Clip

One MG provided per foot

To order separately use MG-02

MMA-02




Magnet Mount
Accessory for MG-02

Sold separately, to order use
MMA-02

Each clip comes with a #6 Flat
Screw

Required when mounting to a non-
magnetic surface

15 FINISH



Custom finishes require a longer
lead time, consult factory




VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

17 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

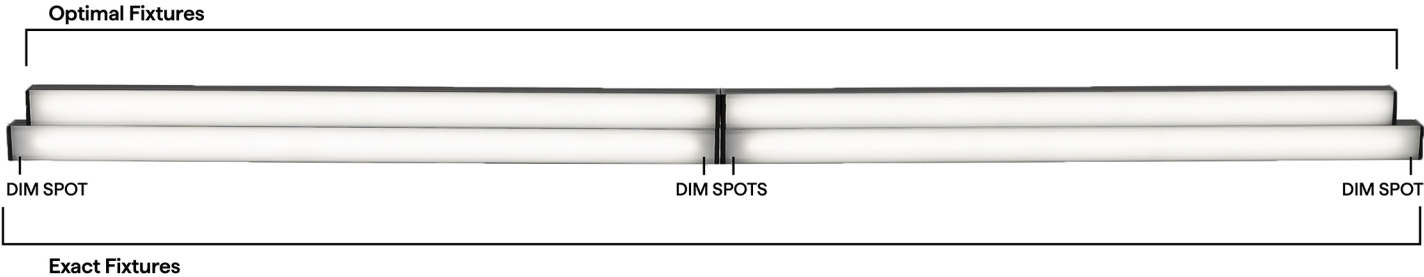

SW ENC LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	11.49"		11.74"		11.34"		11.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	13.49"		13.74"		13.34"		13.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	15.49"		15.74"		15.34"		15.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	17.49"		17.74"		17.34"		17.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	19.49"		19.74"		19.34"		19.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	21.49"		21.74"		21.34"		21.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	23.49"		23.74"		23.34"		23.44"	
36"	35.49"		35.74"		35.34"		35.44"	
48"	47.49"		47.74"		47.34"		47.44"	
60"	59.49"		59.74"		59.34"		59.44"	
72"	71.49"		71.74"		71.34"		71.44"	
84"	83.49"		83.74"		83.34"		83.44"	
96"	95.49"		95.74"		95.34"		95.44"	



VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW-HE ENC LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed IN	S2 Bottom Feed IN	P1 End Feed IN	P2 Bottom Feed IN	S3 Side Feed - Left IN	S4 Side Feed - Right IN	P3 Side Feed - Left IN	P4 Side Feed - Right IN
12"		10.49"		10.74"		10.34"		10.44"
13"		12.49"		12.74"		12.34"		12.44"
14"		12.49"		12.74"		12.34"		12.44"
15"		14.49"		14.74"		14.34"		14.44"
16"		14.49"		14.74"		14.34"		14.44"
17"		16.49"		16.74"		16.34"		16.44"
18"		16.49"		16.74"		16.34"		16.44"
19"		18.49"		18.74"		18.34"		18.44"
20"		18.49"		18.74"		18.34"		18.44"
21"		20.49"		20.74"		20.34"		20.44"
22"		20.49"		20.74"		20.34"		20.44"
23"		22.49"		22.74"		22.34"		22.44"
24"		22.49"		22.74"		22.34"		22.44"
36"		34.49"		34.74"		34.34"		34.44"
48"		46.49"		46.74"		46.34"		46.44"
60"		58.49"		58.74"		58.34"		58.44"
72"		70.49"		70.74"		70.34"		70.44"
84"		82.49"		82.74"		82.34"		82.44"
96"		94.49"		94.74"		94.34"		94.44"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6	Q-SET+QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	



VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES

1.41"

.71"

Adjustable mounting bracket - Medium

1.46"

1.29"

Adjustable mounting bracket - Large

1.46"

4"

Adjustable mounting bracket - XLarge

.75"

1.03"

Small mounting accessory

2.23"

1.38"

Adjustable mounting accessory

J Mounting Bracket

U Mounting Bracket

J Mounting Bracket

Backwards L Mounting Bracket

L Mounting Bracket


L Mounting Bracket



VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

Q-mini-J  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	CON120-EXT  10ft Con cable extender DRY/DMP/WET	CON FOUR-FER  Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL F  Male con to barrel cable adaptor DRY/DMP
--	---	---	---	--

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage