# VERS-LOUVER-SK (07) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Suspended






- 80 Suspension Kit configurations allow fixture to be seamlessly incorporated into any interior
- Create long, continuous lines of light with easy-to-use inline bracket and double feed joiner connectors
- A VERSatile fixture with a black louver that is designed to eliminate glare
- A custom-sized black louver fits snugly above a low-profile clear or diffused lens in the interior of the housing
- Features integrated metal endcaps and durable anodized aluminum housings
- With standard internal White Optics coating, fixtures achieve greater lumen efficacies
- Consult factory for field assembly options

| 1 PRODUCT | 2 WATTS/ FT | 3 CCT | 4 RATED | 5 LENS | 6 EXTERNAL LOUVER | 7 WIRE INPUT/ OUTPUT | 8 CONNECTOR/ WIRE IN | 9 CONNECTOR/ WIRE OUT | 10 WIRE COLOR | 11 WIRE TYPE | 12 MOUNTING | 13 FINISH | 14 LENGTH (IN) | 15 EXACT/ OPTIMAL |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | N/A | S2 | BW | CLS | SV | AWM | SK | | | |

Sample Part Number: **VERS-07-WD-6.0-19/30-DRY-DF-P1-CON6-CON6-BK-CL2-MG-BK-48"-E**

## 1 PRODUCT

**VERS-07-SK-DW**
**VERS-07-SK-DW-USA**

Select USA option for BAA and BABA projects. Only DRY ratings apply.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

**VERS-07-SK-WD**

LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies.

## 2 WATTS/FT

**1.5HE** 1.5W/ft HE
**2.5HE** 2.5W/ft HE

**1.5HE** 1.5W/ft HE
**2.5HE** 2.5W/ft HE

**6.0** 6.0W/ft

## 3 CCT

**18/30** 1800K/3000K
**18/35** 1800K/3500K
**20/27** 2000K/2700K
**20/30** 2000K/3000K
**24/40** 2400K/4000K
**27/40** 2700K/4000K
**27/55** 2700K/5500K

**18/30** 1800K/3000K
**18/35** 1800K/3500K
**20/27** 2000K/2700K
**20/30** 2000K/3000K
**24/40** 2400K/4000K
**27/40** 2700K/4000K
**27/55** 2700K/5500K

**19/27** 1900K/2700K
**19/30** 1900K/3000K

## 4 RATED

**DRY** IP20

**DMP** IP54

**DRY** IP20
**DMP** IP54

## 5 LENS

**DF** Diffused
**CL** Clear

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages.

## 6 EXTERNAL LOUVER

**N/A** Internal Louver included

## 7 WIRE INPUT/OUTPUT

**S2** Single 2 (Input only) - Bottom Feed

## 8 CONNECTOR/WIRE IN

**BW** Bare Wire (Standard 36")

BW: Standard length is 36", max length is 120". Request custom length by writing in part number next to BW (example: BW48)

## 9 CONNECTOR/WIRE OUT

**CLS** Closed End (No feed)

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

## 10 WIRE COLOR

**SV** Silver

## 11 WIRE TYPE

**AWM** Appliance Wiring Material

## 12 MOUNTING

**SK** Suspension Bracket

## 13 FINISH

**ST** Satin
**BK** Black
**BZ** Bronze
**WH** White
**CU** Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

## 14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

## 15 EXACT/OPTIMAL

**O** Optimal Illumination
**E** Exact Specified Length

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTL.lighting


Specification subject to change. Rev-11-11-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance

# VERS-LOUVER-SK (07) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Suspended

## 1 PRODUCT - DIMENSIONS




Profile with lens

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with VERS-07-SK-DW-**-30-DRY

| | 1.5HE W/FT | | | 2.5HE W/FT | | |
|---|---|---|---|---|---|---|
| | LM/FT | CRI | UGR | LM/FT | CRI | UGR |
| CL | 82 | 97 | ≤ 13 | 125 | 98 | ≤ 14.5 |
| DF | 65 | 97 | ≤ 13.4 | 102 | 98 | ≤ 15 |

[Calculated L70 = 70000 hrs]
Tested with VERS-07-SK-WD-**-30-DRY

| | 6.0 W/FT | | |
|---|---|---|---|
| | LM/FT | CRI | UGR |
| CL | 249 | 97 | ≤ 17.7 |
| DF | 201 | 97 | ≤ 17.6 |

## 5 DIODE VISIBILITY




DF - Diffused lens

CL - Clear lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

**6W/ft**




Clear lens



## TEMPERATURE RATINGS

| | | DW 1.5 HE W/FT | | DW 3.0 HE W/FT | | DW 2.5 HE W/FT | | DW 5.0 HE W/FT | | DW 4.0 HE W/FT | | DW 8.0 HE W/FT | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | QTL power supply other than DALI, DMX | | DALI, DMX, or non-QTL power supply | | QTL power supply other than DALI, DMX | | DALI, DMX, or non-QTL power supply | | QTL power supply other than DALI, DMX | | DALI, DMX, or non-QTL power supply | | WD 6.0 W/FT | |
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 145°F | -4°F | 135°F | -4°F | 135°F | -4°F | 120°F | -4°F | 125°F | -4°F | 110°F | -4°F | 115°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 145°F | -4°F | 135°F | -4°F | 135°F | -4°F | 120°F | — | — | — | — | -4°F | 115°F |


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# VERS-LOUVER-SK (07) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Suspended

## 7 WIRE INPUT/ OUTPUT


SINGLE (Input only)





## CONFIGURATION OPTIONS




Single Feed




Continuous Row End Feeds





Continuous Row Center Feeds

## 8 / 9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product.

**BW**
For WD




Bare Wire 36" | 22 AWG
Clear outer jacket, metal shield

**BW**
For DW-HE





Bare Wire 36" | 22 AWG
Clear outer jacket, metal shield

## 10 WIRE COLOR

Silver

## 12 MOUNTING




Suspension Bracket

2 required up to 6' lengths; additional support required between 6' to 8'

## 13 FINISH

Satin

Black

Bronze

White

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26


# VERS-LOUVER-SK (07) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Suspended

## 15 EXACT/OPTIMAL FIXTURE LENGTH


E/O Length Calculator → E/O Explained →

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

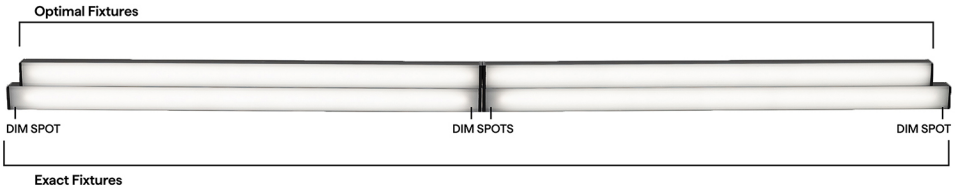



## DW-HE DRY DMP LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture   |
|---|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

### OPTIMAL LENGTH

| Requested Nominal Length | S2   |
|---|---|
| 12" | 10.59" |
| 13" | 12.59" |
| 14" | 12.59" |
| 15" | 14.59" |
| 16" | 14.59" |
| 17" | 16.59" |
| 18" | 16.59" |
| 19" | 18.59" |
| 20" | 18.59" |
| 21" | 20.59" |
| 22" | 20.59" |
| 23" | 22.59" |
| 24" | 22.59" |
| 36" | 34.59" |
| 48" | 46.59" |
| 60" | 58.59" |
| 72" | 70.59" |
| 84" | 82.59" |
| 96" | 94.59" |


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# VERS-LOUVER-SK (07) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Suspended

## WD DRY DMP LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture   End Feed |
|---|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

### OPTIMAL LENGTH

| Requested Nominal Length | S2   Bottom Feed |
|---|---|
| 12" | 10.49" |
| 13" | 12.49" |
| 14" | 12.49" |
| 15" | 14.49" |
| 16" | 14.49" |
| 17" | 16.49" |
| 18" | 16.49" |
| 19" | 18.49" |
| 20" | 18.49" |
| 21" | 20.49" |
| 22" | 20.49" |
| 23" | 22.49" |
| 24" | 22.49" |
| 36" | 34.49" |
| 48" | 46.49" |
| 60" | 58.49" |
| 72" | 70.49" |
| 84" | 82.49" |
| 96" | 94.49" |

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | |
|---|---|---|
| | DW-HE Warm Dim Applications | WD |
| 0.1% | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT8<br>QT-CAB-eLED+DALI-DT8-AWN<br>QT-CAB-eLED+WD<br>QT-CAB-eLED+WD-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT8<br>QTM-eLED+DALI-DT8-AWN<br>QTM-eLED+WD<br>QTM-eLED+WD-AWN<br>QZ-DW | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP |
| 1% | QZ-DALI-DT8 | QTM-eLED(E)<br>QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with WD App Dongle | Non-Dim Power Supply with SW App Dongle |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# VERS-LOUVER-SK (07) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Suspended

| DIMMING PROTOCOL | INDOOR | |
|---|---|---|
| | **DW-HE Warm Dim Applications** | **WD** |
| **Phase** | QZ-DW | QT-CAB-QZ-PH/0-10V<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP |
| **0-10V** | QT-CAB-eLED+WD<br>QT-CAB-eLED+WD-AWN<br>QTM-eLED+WD<br>QTM-eLED+WD-AWN<br>QZ-DW | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QTM-eLED+0-10V<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP |
| **Lutron Athena** | QT-CAB-eLED+DALI-DT8-AWN<br>QT-CAB-eLED+WD-AWN<br>QTM-eLED+DALI-DT8-AWN<br>QTM-eLED+WD-AWN | QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6-AWN |
| **ECO System** | | QTM-eLED(E) |
| **DMX**<br>If using DW LED, wattage must be doubled | | QZ-DMX |
| **DALI-2: DT6**<br>If using DW LED, wattage must be doubled except for AWN | QT-CAB-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6 | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 |
| **DALI-2: DT8**<br>If using DW LED, wattage must be doubled except for AWN | QT-CAB-eLED+DALI-DT8<br>QT-CAB-eLED+DALI-DT8-AWN<br>QTM-eLED+DALI-DT8<br>QTM-eLED+DALI-DT8-AWN<br>QZ-DALI-DT8 | |
| **SCENE App Dimmed** | Non-Dim Power Supply with WD App Dongle | Non-Dim Power Supply with SW App Dongle |


## COMPATIBLE WIRING ACCESSORIES

**Q-mini-J**




UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

**Q-mini-J5**




UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

**SCENE APP DONGLE**




Wi-Fi or Bluetooth Connectivity

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26

# VERS-LOUVER-SK (07) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Suspended

## COMPATIBLE APPS

**NFC APP**




Read and write DMX addresses and adjust voltage

# VERS-SK

Linear Fixtures - Suspended



- Shop drawings required for run lengths over 8ft
- If no suspension length provided, 36" is standard
- Suspension cable maximum length: 120"
- Suspension cable is field cuttable
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25" in middle without additional support.
- Any run length over 8' requires inline brackets
- Consult factory for power over aircraft
- Consult factory for custom color of canopy
- Lag Screw is for mounting into drywall, wood, or other types of finished ceilings for non-feed mounting only

## POWER FEED SUSPENSION KIT

| 1 PRODUCT | 2 FEED | 3 CANOPY SHAPE | 4 CANOPY SIZE | 5 CANOPY FINISH | 6 APPLICATION | 7 SUSPENSION CABLE LENGTH (IN) |
|---|---|---|---|---|---|---|
| SK | | | 5" | | | |

Sample Part Number: **SK-SF-RD-5"-WH-JB-36"**

**1 PRODUCT**

| | |
|---|---|
| **SK** | |

**2 FEED**

| | |
|---|---|
| **SF** | Single |
| **DF** | Double |

**3 CANOPY SHAPE**

| | |
|---|---|
| **RD** | Round |
| **SQ** | Square |

**4 CANOPY SIZE**

| |
|---|
| **5"** |

**5 CANOPY FINISH**

| | |
|---|---|
| **WH** | White |
| **BK** | Black |

**6 APPLICATION**

| | |
|---|---|
| **JB** | Junction Box |
| **TB** | T-Bar Mount |

JB - mounting bracket only, junction box not included
TB - mounting bracket and junction box

**7 SUSPENSION CABLE LENGTH (IN)**

| |
|---|
| **36"** |
| **120"** |

## NON-FEED SUSPENSION KIT

| 1 PRODUCT | 2 FEED | 3 CANOPY SHAPE | 4 CANOPY SIZE | 5 CANOPY FINISH | 6 APPLICATION | 7 SUSPENSION CABLE LENGTH (IN) |
|---|---|---|---|---|---|---|
| SK | NF | | | | | |

Sample Part Number: **SK-SF-RD-5"-WH-JB-36"**

**1 PRODUCT**

| | |
|---|---|
| **SK** | |

**2 FEED**

| | |
|---|---|
| **NF** | No Feed |

**3 CANOPY SHAPE**

| | |
|---|---|
| **RD** | Round |
| **SQ** | Square |

**4 CANOPY SIZE**

| |
|---|
| **2"** |
| **5"** |
| **5"** |

**5 CANOPY FINISH**

| | |
|---|---|
| **WH** | White |
| **BK** | Black |
| **WH** | White |
| **BK** | Black |

**6 APPLICATION**

| | |
|---|---|
| **TB** | T-Bar Mount |
| **LS** | Lag Screw |

TB - T-Bar clip only, junction box not included

| | |
|---|---|
| **JB** | Junction Box |

Mounting bracket only, junction box not included

**7 SUSPENSION CABLE LENGTH (IN)**

| |
|---|
| **36"** |
| **120"** |

## KIT CONTENTS

- 1/16" Steel suspension cable – 36" standard
- Selected canopy
- Cable Gripper
- Cable Coupler

**JBOX**
- Bracket to mount to junction box (junction box not included)
- Wire strain relief
- Ties for securing electrical cable to suspension cable

**T-BAR – feed**
- Includes junction box specifically designed for T-BAR applications
- Bracket to mount to junction box
- Wire strain relief
- Ties for securing electrical wire to suspension cable

**T-BAR – non-feed**
- Bracket to mount to T-BAR (no junction box)

**LAG SCREW – non-feed only**
- Double ended screw, with a wood thread side and machine thread side
- One piece cable coupler


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

# VERS-SK

Linear Fixtures - Suspended


## 3 CANOPY OPTIONS

**RD - 2" - NF**





Round
2"
No Feed

**SQ - 2" - NF**





Square
2"
No Feed

**RD - 5" - NF**





Round
5"
No Feed

**SQ - 5 - NF**





Square
5"
No Feed

**RD - 5" - SF**





Round
5"
Single Feed

**SQ - 5" - SF**





Square
5"
Single Feed

**RD - 5" - DF**





Round
5"
Double Feed

**SQ - 5" - DF**




Square
5"
Double Feed


## 5 CANOPY FINISH




White

Black

## JOINTS/CONNECTORS





Inline Bracket




Double Feed Joiner


## 6 APPLICATION

**TB**
Power Feed Kit




T-Bar Junction Box

**TB**
Non-Feed Kit




T-Bar Clip

**LS**



Lag Screw

## KIT HARDWARE



Cable Gripper



Cable Coupler


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

# VERS-SK


Linear Fixtures - Suspended

## MOUNTING


- Maximum single fixture length: 98”
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25” in middle without additional support.
- Shop drawings required for run lengths over 8ft
- Any double fed fixture will come with double feed joiner and inline bracket

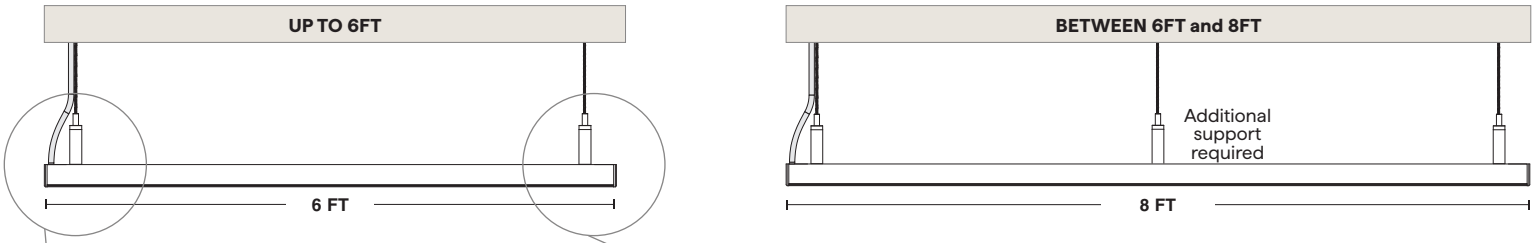


**Power Feed Suspension**

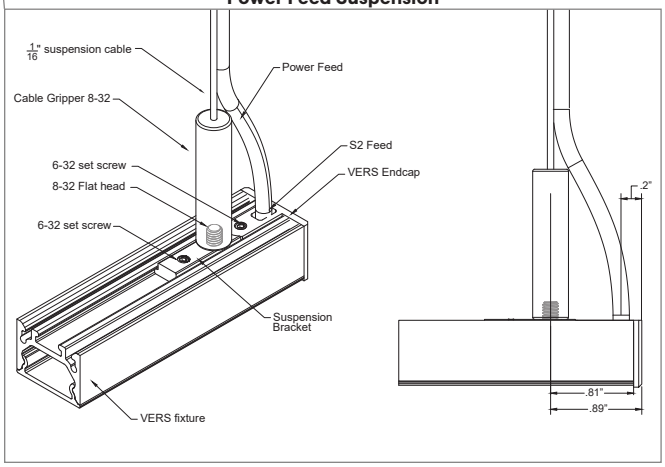


**Non-Feed Suspension**

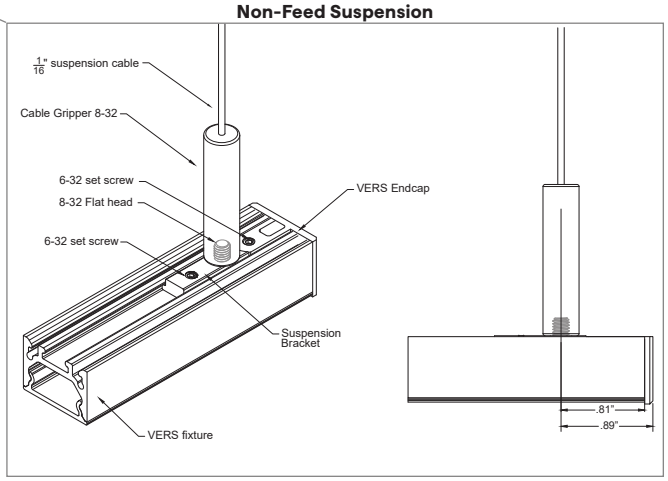



© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


# VERS-SK

Linear Fixtures - Suspended

## MOUNTING

- Maximum single fixture length: 98"
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25" in middle without additional support.
- Shop drawings required for run lengths over 8ft
- Any double fed fixture will come with double feed joiner and inline bracket

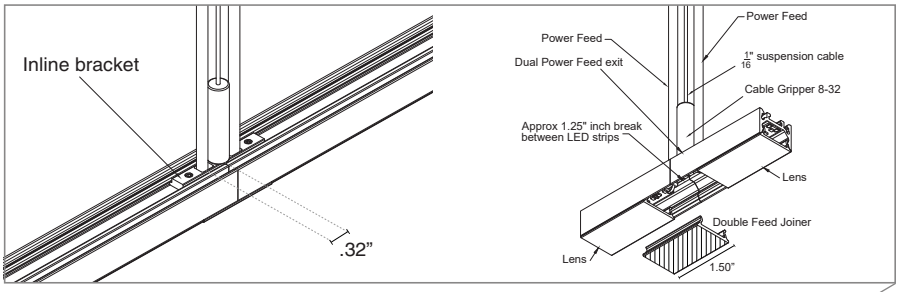


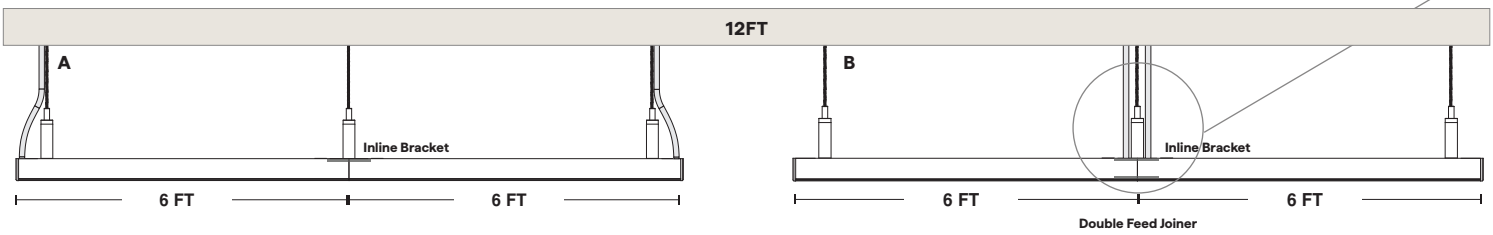



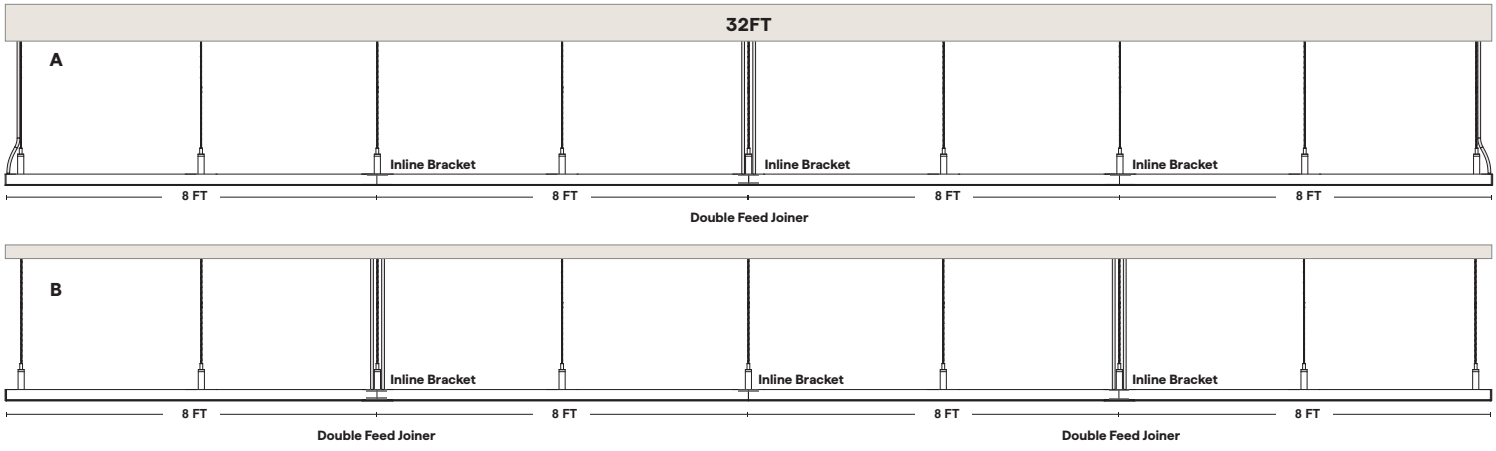

**Part number example for a suspended VERS-01 dry rated static white fixture with a diffused lens in 1.5W/ft, 3000K, in a satin finish:**

**A** VERS-01-SK-SW-1.5-30-DRY-DF-N/A-S2-BW-CLS-SV-AWM-SK-ST-144" (1X)
SK-SF-RD-5"-WH-JB-36" (2X)
SK-NF-RD-5"-WH-JB-36" (1X)

**B** VERS-01-SK-SW-1.5-30-DRY-DF-N/A-S2-BW-CLS-SV-AWM-SK-ST-144" (1X)
SK-DF-RD-5"-WH-JB-36" (1X)
SK-NF-RD-5"-WH-JB-36" (2X)

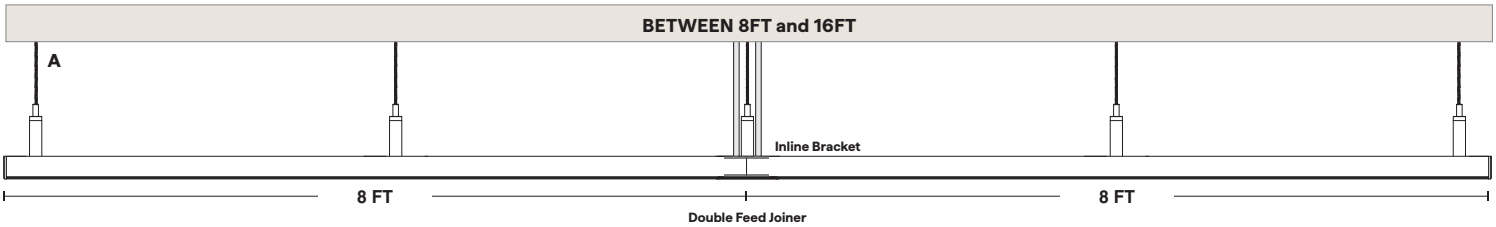

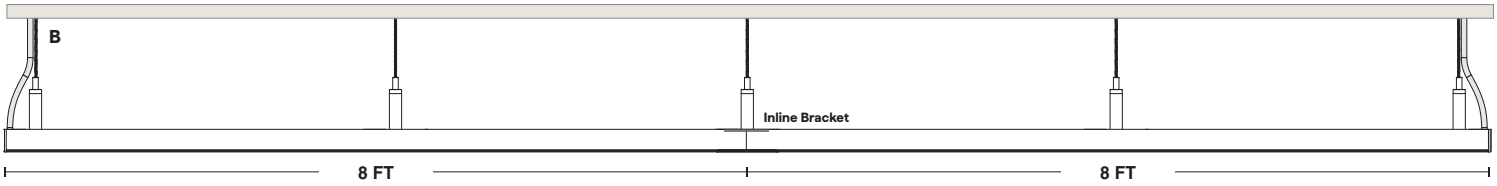

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


# VERS-SK

Linear Fixtures - Suspended


## SUSPENSION T-BAR POWER FEED ASSEMBLY

SK-SF-RD-5-**-TB-36

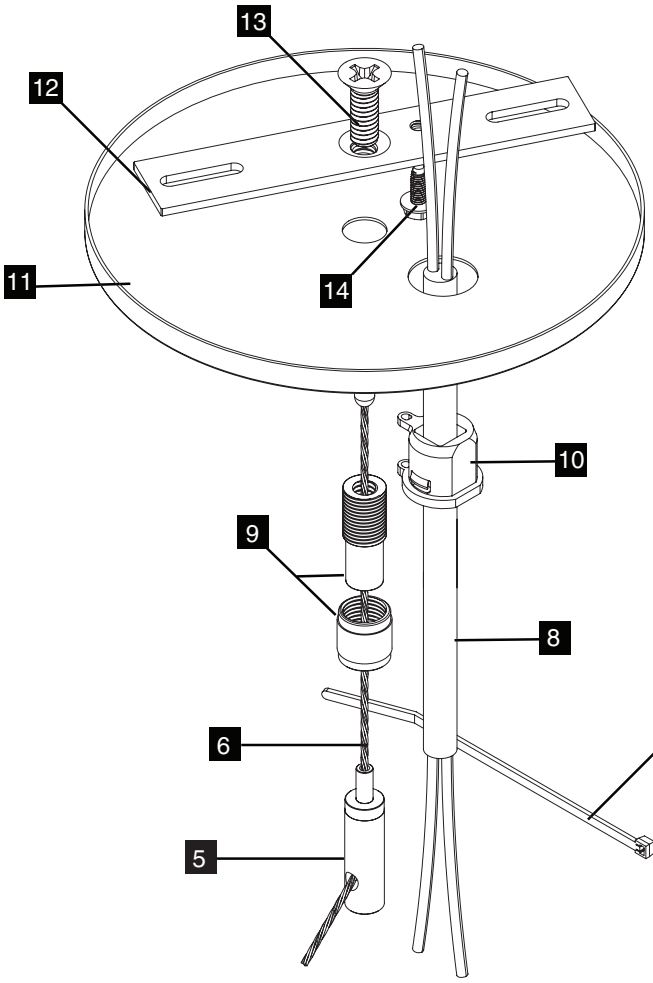

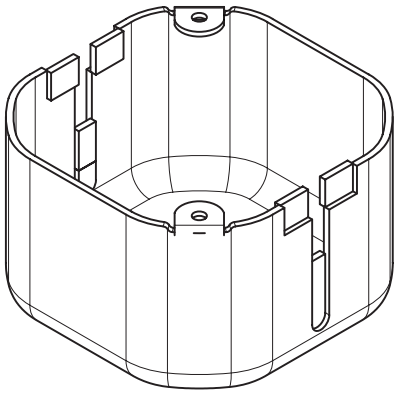15 T-Bar mounted Junction Box

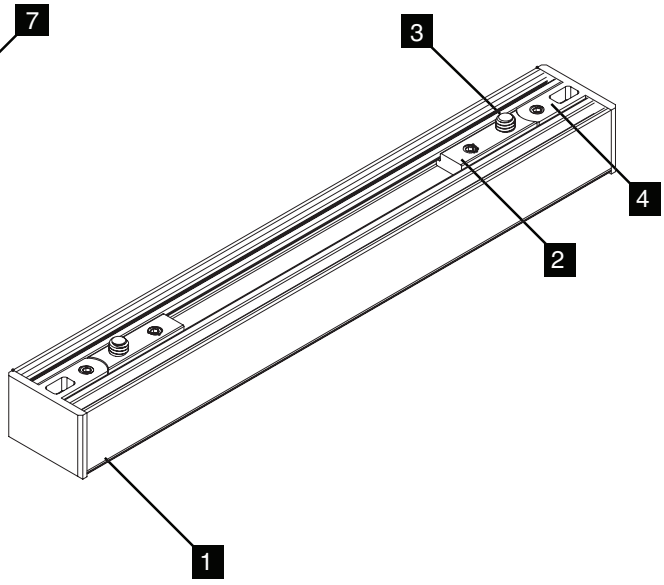


### VERS SUSPENSION COMPONENTS

| | | | | | | |
|---|---|---|---|---|---|---|
| 1 VERS | 2 Suspension Bracket | 3 8-32 Screw | 4 Endcap | 5 Cable Gripper | 6 1/16” Cable | 7 Tie |
| 8 Lead Wire | 9 Cable Coupler | 10 Strain Relief | 11 Canopy | 12 Crossbar | 13 1/4”-20 | 14 Ground Screw |

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


# VERS-SK

Linear Fixtures - Suspended

## SUSPENSION POWER FEED ASSEMBLY - TO MOUNT TO JUNCTION BOX*

*JUNCTION BOX NOT INCLUDED

SK-SF-RD-5-**-JB-36

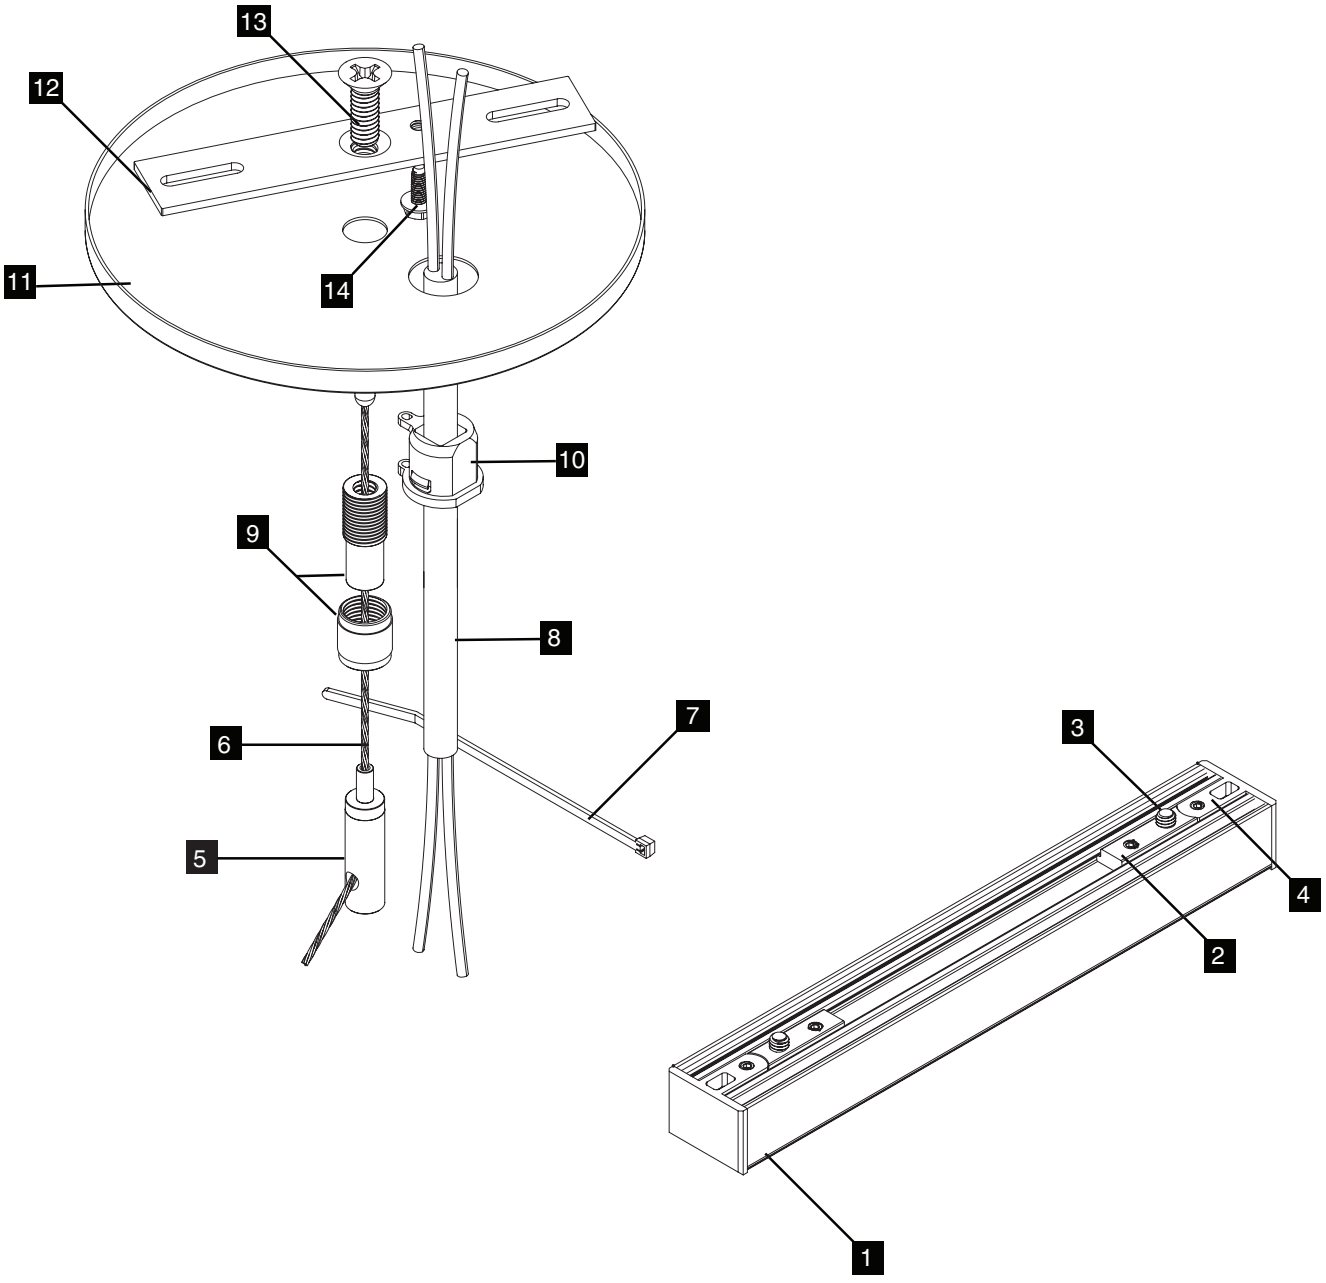


### VERS SUSPENSION COMPONENTS

| | | | | | | |
|---|---|---|---|---|---|---|
| 1 VERS | 2 Suspension Bracket | 3 8-32 Screw | 4 Endcap | 5 Cable Gripper | 6 1/16” Cable | 7 Tie |
| 8 Lead Wire | 9 Cable Coupler | 10 Strain Relief | 11 Canopy | 12 Crossbar | 13 1/4”-20 | 14 Ground Screw |


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


# VERS-SK

Linear Fixtures - Suspended

## SUSPENSION T-BAR NON-FEED ASSEMBLY

SK-NF-RD-2-NF-*-TB-36

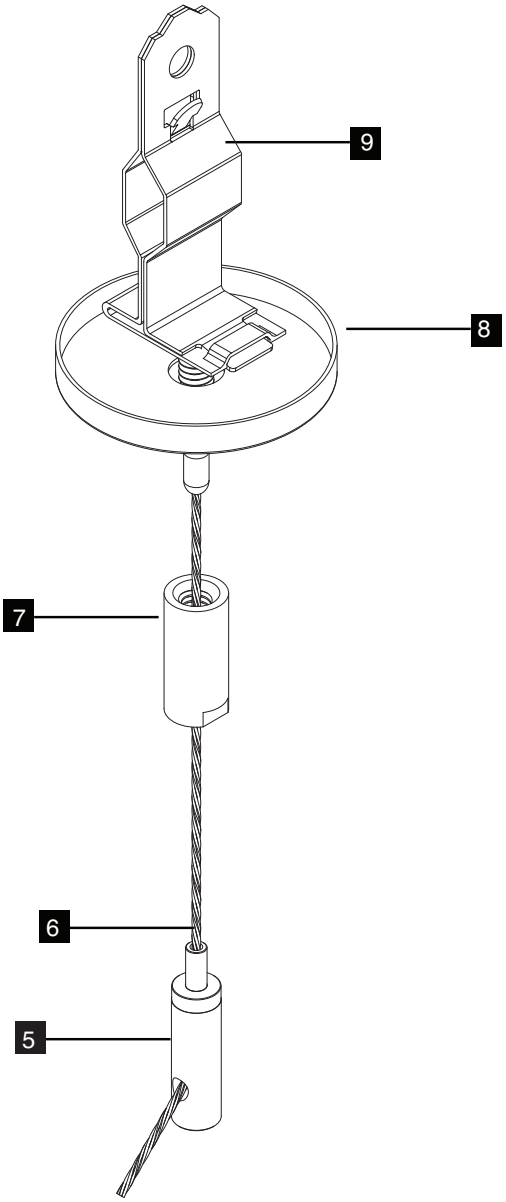

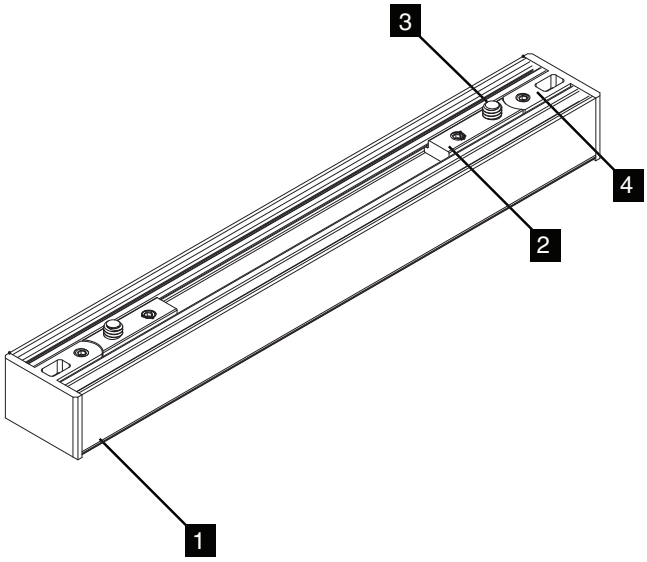
NON-POWERED FEED KIT

| | | | | |
|---|---|---|---|---|
| 1 VERS | 2 Suspension Bracket | 3 8-32 Screw | 4 Endcap | 5 Cable Gripper |
| 6 1/16” Cable | 7 Cable Coupler | 8 Canopy | 9 T-Bar Clip | |


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


# VERS-SK

Linear Fixtures - Suspended

## LAG SCREW NON-FEED ASSEMBLY

SK-NF-RD-2-NF-*-LS-36

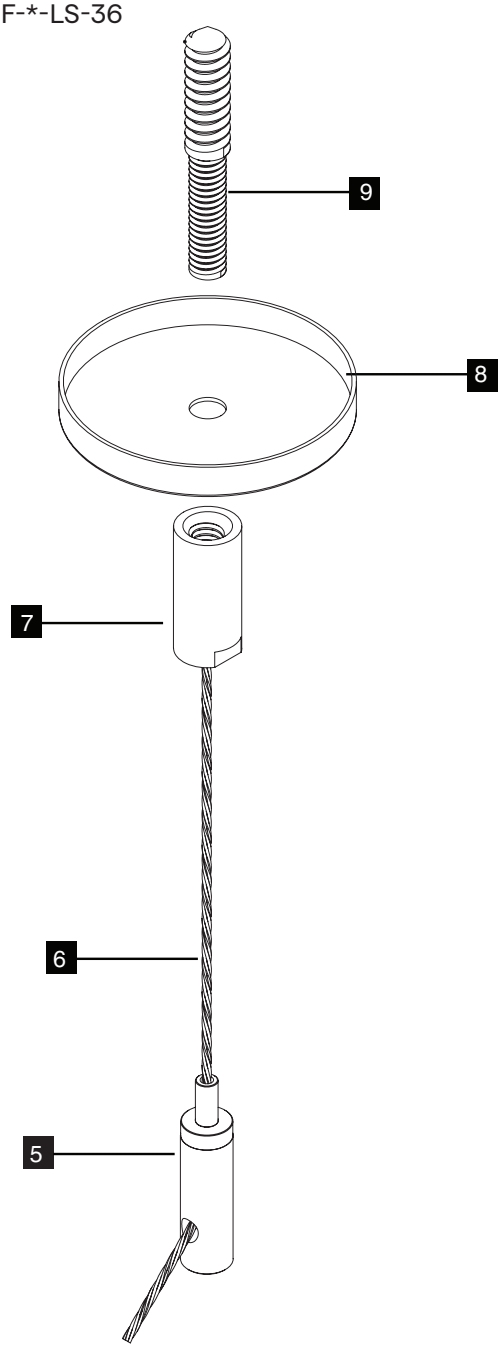

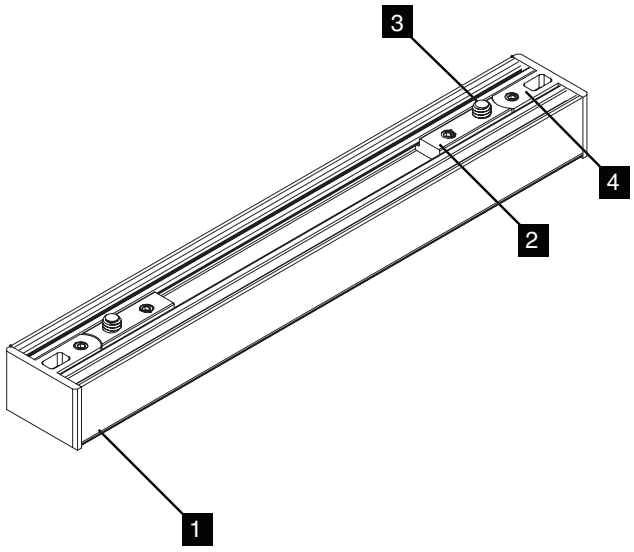
NON-POWERED FEED KIT

| | | | | |
|---|---|---|---|---|
| 1 VERS | 2 Suspension Bracket | 3 8-32 Screw | 4 Endcap | 5 Cable Gripper |
| 6 1/16” Cable | 7 Cable Coupler | 8 Canopy | 9 Lag Screw | |

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting