# MAJOR-FLAT-SK (01) STATIC WHITE

24VDC Linear Fixtures - Surface


410.2 & 410.16 Closet Rated up to 4.0W/ft

1-BIN 1-STEP SW/SW-HE ONLY

5 YEAR WARRANTY

SW, SW-HE ONLY

FPO




- Choose from diffused, polar, or prismatic lens options for varying diode visibility and beam cutoffs

| 1 PRODUCT | 2 WATTS/ FT | 3 CCT | 4 RATED | 5 LENS | 6 EXTERNAL LOUVER | 7 WIRE INPUT/ OUTPUT | 8 CONNECTOR/ WIRE IN | 9 CONNECTOR/ WIRE OUT | 10 WIRE COLOR | 11 WIRE TYPE | 12 MOUNTING | 13 FINISH | 14 LENGTH (IN) | 15 EXACT/ OPTIMAL |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | DRY | DF | | S2 | BW | CLS | | | SK | | | |

Sample Part Number: **MA1-SK-SW-5.0-30-DRY-DF-S2-BW-CLS-BK-CL2-SK-BK-48"-E**

## 1 PRODUCT

**MA1-SK-SW**
**MA1-SK-SW-USA**

Select USA option for BAA and BABA projects. SW and SW-HE only. Only DRY or WET ratings apply.

See following pages for compatible power supplies.

## 2 WATTS/FT

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |
| **1.5HE** | 1.5W/ft HE |
| **3.0HE** | 3.0W/ft HE |
| **6.0HE** | 6.0W/ft HE |
| **9.0HE** | 9.0W/ft HE |

## 3 CCT

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

## 4 RATED

| | |
|---|---|
| **DRY** | IP20 |

## 5 LENS

| | |
|---|---|
| **DF** | Diffused |

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages
For optional snap-on louver ordering, see External Louver Accessory section on following pages

## 6 EXTERNAL LOUVER

## 7 WIRE INPUT/OUTPUT

| | |
|---|---|
| **S2** | Single 2 (Input only) - Bottom Feed |

## 8 CONNECTOR/WIRE IN

| | |
|---|---|
| **BW** | Bare Wire (Standard 36") |

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

## 9 CONNECTOR/WIRE OUT

| | |
|---|---|
| **CLS** | Closed End (No feed) |

## 10 WIRE COLOR

| | |
|---|---|
| **WH** | White |
| **BK** | Black |

## 11 WIRE TYPE

| | |
|---|---|
| **CL2** | Class 2 |
| **CL2P** | Plenum Rated |
| **N/A** | For Barrel |

CL2P only available with bare wire leads (BW)

## 12 MOUNTING

| | |
|---|---|
| **SK** | Suspension Bracket |

## 13 FINISH

| | |
|---|---|
| **ST** | Satin |
| **BK** | Black |
| **WH** | White |
| **CU** | Custom |

Custom finishes require a longer lead time, consult factory

## 14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

## 15 EXACT/OPTIMAL

| | |
|---|---|
| **O** | Optimal Illumination |
| **E** | Exact Specified Length |

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

PRELIMINARY SUBJECT TO CHANGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-11-11-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


# MAJOR-FLAT-SK (01) STATIC WHITE

24VDC Linear Fixtures - Surface

## 1 PRODUCT - DIMENSIONS




Profile




Profile with flat lens and stainless steel mounting clip

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 50000 for HE+]
Tested with TQ1SW-**-30-DRY-STD

| | 1.5 W/FT | | 1.5HE W/FT | | 3.0 W/FT | | 3.0HE W/FT | | 3.0HE+ W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0HE W/FT | | 6.0HE+ W/FT | | 9.0HE W/FT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI |
| FR | 127 | 98 | 153 | 98 | 222 | 98 | 281 | 98 | 405 | 92 | 276 | 98 | 336 | 98 | 532 | 98 | 749 | 92 | 800 | 98 |
| PR | 111 | 98 | 138 | 98 | 193 | 98 | 252 | 98 | 364 | 92 | 240 | 98 | 293 | 98 | 478 | 98 | 673 | 92 | 719 | 98 |
| DF | 98 | 98 | 124 | 98 | 171 | 98 | 228 | 98 | 329 | 92 | 213 | 98 | 259 | 98 | 432 | 98 | 608 | 92 | 649 | 98 |

[Calculated L70 = 70000 hrs, L70 = 50000 for HE+]
Tested with TQ1SW-**-30-DRY-WO

| | 1.5 W/FT | | 1.5HE W/FT | | 3.0 W/FT | | 3.0HE W/FT | | 3.0HE+ W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0HE W/FT | | 6.0HE+ W/FT | | 9.0HE W/FT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI |
| FR | 139 | 98 | 168 | 98 | 242 | 98 | 308 | 98 | 444 | 92 | 301 | 98 | 366 | 98 | 584 | 98 | 821 | 92 | 877 | 98 |
| PR | 126 | 98 | 152 | 98 | 220 | 98 | 279 | 98 | 402 | 92 | 274 | 98 | 334 | 98 | 528 | 98 | 743 | 92 | 793 | 98 |
| DF | 113 | 98 | 135 | 98 | 197 | 98 | 247 | 98 | 357 | 92 | 245 | 98 | 299 | 98 | 469 | 98 | 660 | 92 | 705 | 98 |

## 6 DIODE VISIBILITY




PRELIMINARY
SUBJECT TO CHANGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# MAJOR-FLAT-SK (01) STATIC WHITE

24VDC Linear Fixtures - Surface

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





60°

## TEMPERATURE RATINGS

| | | 1.5 W/FT | | 1.5 HE W/FT | | 3.0 W/FT | | 3.0 HE W/FT | | 3.0 HE+ W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0 HE W/FT | | 6.0 HE+ | | 9.0 HE | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 135°F | -4°F | 135°F | -13°F | 135°F | -4°F | 130°F | -4°F | 125°F | -4°F | 130°F | -13°F | 125°F | -4°F | 105°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 135°F | -4°F | 135°F | — | — | -4°F | 130°F | -4°F | 125°F | -4°F | 130°F | — | — | — | — |
| WET | Ambient Operating Temp - Surface | -4°F | 135°F | — | — | -4°F | 130°F | — | — | — | — | -4°F | 125°F | -4°F | 120°F | — | — | — | — | — | — |


## 7 WIRE INPUT/ OUTPUT

SINGLE (Input only)




Bottom Feed

## CONFIGURATION OPTIONS




Continuous Bottom Feed

PRELIMINARY
SUBJECT TO CHANGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


# MAJOR-FLAT-SK (01) STATIC WHITE

24VDC Linear Fixtures - Surface

## 8/9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

**BW**





Bare Wire 24"
22 AWG

**CON6/CON24**




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

## 10 WIRE COLOR




White

Black

## 12 MOUNTING


**SK**




Suspension Bracket

2 required up to 6' lengths; additional support required between 6' to 8'

## 13 FINISH



Satin

Black

White

Custom finishes require a longer lead time, consult factory


Custom finishes require a longer lead time, consult factory

## 15 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

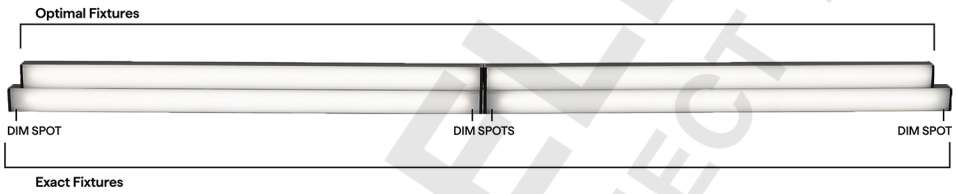


PRELIMINARY
SUBJECT TO CHANGE


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

# MAJOR-FLAT-SK (01) STATIC WHITE


24VDC Linear Fixtures - Surface

## SW DRY DMP LENGTHS BY INCH

**EXACT LENGTH**


| Requested Length | Potential dim spot on either end of a S1 fixture   End Feed |
|---|---|
| 12" | 0.5" |
| 13" | 0.5" |
| 14" | 0.5" |
| 15" | 0.5" |
| 16" | 0.5" |
| 17" | 0.5" |
| 18" | 0.5" |
| 19" | 0.5" |
| 20" | 0.5" |
| 21" | 0.5" |
| 22" | 0.5" |
| 23" | 0.5" |
| 24" | 0.5" |
| 36" | 0.5" |
| 48" | 0.5" |
| 60" | 0.5" |
| 72" | 0.5" |
| 84" | 0.5" |
| 96" | 0.5" |

**OPTIMAL LENGTH**


| Requested Nominal Length | S2   Bottom Feed |
|---|---|
| 12" | 11.49" |
| 13" | 12.49" |
| 14" | 13.49" |
| 15" | 14.49" |
| 16" | 15.49" |
| 17" | 16.49" |
| 18" | 17.49" |
| 19" | 18.49" |
| 20" | 19.49" |
| 21" | 20.49" |
| 22" | 21.49" |
| 23" | 22.49" |
| 24" | 23.49" |
| 36" | 35.49" |
| 48" | 47.49" |
| 60" | 59.49" |
| 72" | 71.49" |
| 84" | 83.49" |
| 96" | 95.49" |

## SW-HE DRY DMP LENGTHS BY INCH

**EXACT LENGTH**

| Requested Length | Potential dim spot on either end of a S1 fixture   End Feed |
|---|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

**OPTIMAL LENGTH**

| Requested Nominal Length | S2   Bottom Feed |
|---|---|
| 12" | 10.49" |
| 13" | 12.49" |
| 14" | 12.49" |
| 15" | 14.49" |
| 16" | 14.49" |
| 17" | 16.49" |
| 18" | 16.49" |
| 19" | 18.49" |
| 20" | 18.49" |
| 21" | 20.49" |
| 22" | 20.49" |
| 23" | 22.49" |
| 24" | 22.49" |
| 36" | 34.49" |
| 48" | 46.49" |
| 60" | 58.49" |
| 72" | 70.49" |
| 84" | 82.49" |
| 96" | 94.49" |

PRELIMINARY SUBJECT TO CHANGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

# MAJOR-FLAT-SK (01) STATIC WHITE

24VDC Linear Fixtures - Surface

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | | OUTDOOR | |
|---|---|---|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Dim to Black | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 | QOM-DC+CAP<br>QOM-PH | QOM-DC+CAP<br>QOM-PH |
| 0.1% | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | Q-SET-QZ-DMX<br>Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QOM-eLED+DALI-DT6<br>QOM-eLED+DALI-DT6-PS<br>QZ-DMX<br>QZ-PRO-PH/0-10V | Q-SET-QZ-DMX<br>Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QOM-eLED+DALI-DT6<br>QOM-eLED+DALI-DT6-PS<br>QZ-DMX<br>QZ-PRO-PH/0-10V |
| 1% | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | Q-HEX-mini-DC<br>Q-SET-mLED | |

PRELIMINARY
SUBJECT TO CHANGE

# MAJOR-FLAT-SK (01) STATIC WHITE

24VDC Linear Fixtures - Surface

| DIMMING PROTOCOL | INDOOR | | OUTDOOR | |
|---|---|---|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| **Non-Dim** | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND | Q-SET-QZ-ND<br>Q-SET-eLED-ND<br>QOM-eLED-ND<br>QZ-ND | Q-SET-QZ-ND<br>Q-SET-eLED-ND<br>QOM-eLED-ND<br>QZ-ND |
| **Phase** | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 | Q-HEX-mini-DC<br>Q-SET-QZ-PH/0-10V<br>Q-SET-mLED<br>QOM-DC+CAP<br>QOM-PH<br>QZ-PRO-PH/0-10V | Q-SET-QZ-PH/0-10V<br>QOM-DC+CAP<br>QOM-PH<br>QZ-PRO-PH/0-10V |
| **0-10V** | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QZ-PRO-PH/0-10V | Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QZ-PRO-PH/0-10V |
| **Lutron Athena** | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN | | |
| **ECO System** | QTM-eLED(E) | QTM-eLED(E) | | |
| **DMX** | QZ-DMX | QZ-DMX | Q-SET-QZ-DMX<br>QZ-DMX | Q-SET-QZ-DMX<br>QZ-DMX |
| **DALI-2: DT6** | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QOM-eLED+DALI-DT6<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QOM-eLED+DALI-DT6<br>QZ-DALI-DT6 |
| **SCENE App Dimmed** | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | | |


## COMPATIBLE MOUNTING ACCESSORIES

**HINGE - HMB-M**




Adjustable mounting bracket - Medium

**HINGE - HMB-L**




Adjustable mounting bracket - Large

**HINGE - HMB-XL**




Adjustable mounting bracket - XLarge

**Q-PIVOT**




Small mounting accessory

**Q-ANGLE**




Adjustable mounting accessory

PRELIMINARY
SUBJECT TO CHANGE

# VERS-SK

Linear Fixtures - Suspended



- Shop drawings required for run lengths over 8ft
- If no suspension length provided, 36" is standard
- Suspension cable maximum length: 120"
- Suspension cable is field cuttable
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25" in middle without additional support.
- Any run length over 8' requires inline brackets
- Consult factory for power over aircraft
- Consult factory for custom color of canopy
- Lag Screw is for mounting into drywall, wood, or other types of finished ceilings for non-feed mounting only

## POWER FEED SUSPENSION KIT

| 1 PRODUCT | 2 FEED | 3 CANOPY SHAPE | 4 CANOPY SIZE | 5 CANOPY FINISH | 6 APPLICATION | 7 SUSPENSION CABLE LENGTH (IN) |
|---|---|---|---|---|---|---|
| SK | | | 5" | | | |

Sample Part Number: **SK-SF-RD-5"-WH-JB-36"**

**1 PRODUCT**

| | |
|---|---|
| **SK** | |

**2 FEED**

| | |
|---|---|
| **SF** | Single |
| **DF** | Double |

**3 CANOPY SHAPE**

| | |
|---|---|
| **RD** | Round |
| **SQ** | Square |

**4 CANOPY SIZE**

| |
|---|
| **5"** |

**5 CANOPY FINISH**

| | |
|---|---|
| **WH** | White |
| **BK** | Black |

**6 APPLICATION**

| | |
|---|---|
| **JB** | Junction Box |
| **TB** | T-Bar Mount |

JB - mounting bracket only, junction box not included
TB - mounting bracket and junction box

**7 SUSPENSION CABLE LENGTH (IN)**

| |
|---|
| **36"** |
| **120"** |

## NON-FEED SUSPENSION KIT

| 1 PRODUCT | 2 FEED | 3 CANOPY SHAPE | 4 CANOPY SIZE | 5 CANOPY FINISH | 6 APPLICATION | 7 SUSPENSION CABLE LENGTH (IN) |
|---|---|---|---|---|---|---|
| SK | NF | | | | | |

Sample Part Number: **SK-SF-RD-5"-WH-JB-36"**

**1 PRODUCT**

| | |
|---|---|
| **SK** | |

**2 FEED**

| | |
|---|---|
| **NF** | No Feed |

**3 CANOPY SHAPE**

| | |
|---|---|
| **RD** | Round |
| **SQ** | Square |

**4 CANOPY SIZE**

| |
|---|
| **2"** |
| **5"** |
| **5"** |

**5 CANOPY FINISH**

| | |
|---|---|
| **WH** | White |
| **BK** | Black |
| **WH** | White |
| **BK** | Black |

**6 APPLICATION**

| | |
|---|---|
| **TB** | T-Bar Mount |
| **LS** | Lag Screw |

TB - T-Bar clip only, junction box not included

| | |
|---|---|
| **JB** | Junction Box |

Mounting bracket only, junction box not included

**7 SUSPENSION CABLE LENGTH (IN)**

| |
|---|
| **36"** |
| **120"** |

## KIT CONTENTS

- 1/16" Steel suspension cable – 36" standard
- Selected canopy
- Cable Gripper
- Cable Coupler

**JBOX**
- Bracket to mount to junction box (junction box not included)
- Wire strain relief
- Ties for securing electrical cable to suspension cable

**T-BAR – feed**
- Includes junction box specifically designed for T-BAR applications
- Bracket to mount to junction box
- Wire strain relief
- Ties for securing electrical wire to suspension cable

**T-BAR – non-feed**
- Bracket to mount to T-BAR (no junction box)

**LAG SCREW – non-feed only**
- Double ended screw, with a wood thread side and machine thread side
- One piece cable coupler









PRELIMINARY
SUBJECT TO CHANGE

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

# VERS-SK

Linear Fixtures - Suspended

## 3 CANOPY OPTIONS

| RD - 2" - NF | SQ - 2" - NF | RD - 5" - NF | SQ - 5 - NF | RD - 5" - SF | SQ - 5" - SF | RD - 5" - DF | SQ - 5" - DF |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| Round<br>2"<br>No Feed | Square<br>2"<br>No Feed | Round<br>5"<br>No Feed | Square<br>5"<br>No Feed | Round<br>5"<br>Single Feed | Square<br>5"<br>Single Feed | Round<br>5"<br>Double Feed | Square<br>5"<br>Double Feed |


## 5 CANOPY FINISH




White

Black

## JOINTS/CONNECTORS





Inline Bracket




Double Feed Joiner


## 6 APPLICATION

**TB**
Power Feed Kit




T-Bar Junction Box

**TB**
Non-Feed Kit




T-Bar Clip

**LS**



Lag Screw

## KIT HARDWARE



Cable Gripper



Cable Coupler

PRELIMINARY
SUBJECT TO CHANGE


© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


# VERS-SK


Linear Fixtures - Suspended

## MOUNTING

- Maximum single fixture length: 98”
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25” in middle without additional support.
- Shop drawings required for run lengths over 8ft
- Any double fed fixture will come with double feed joiner and inline bracket

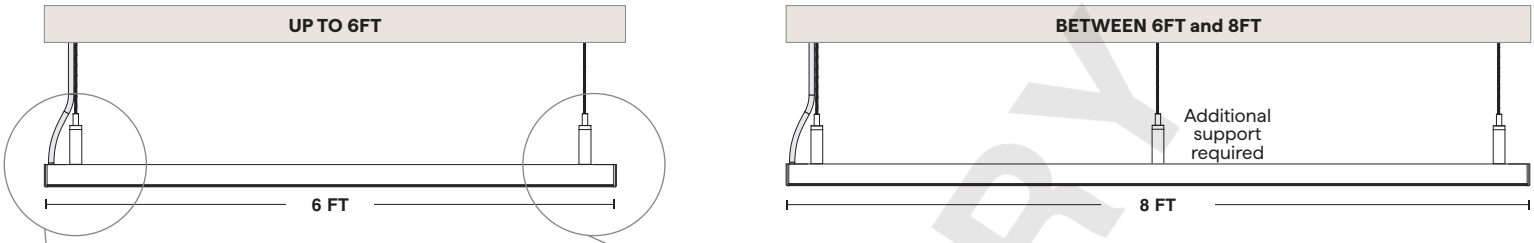

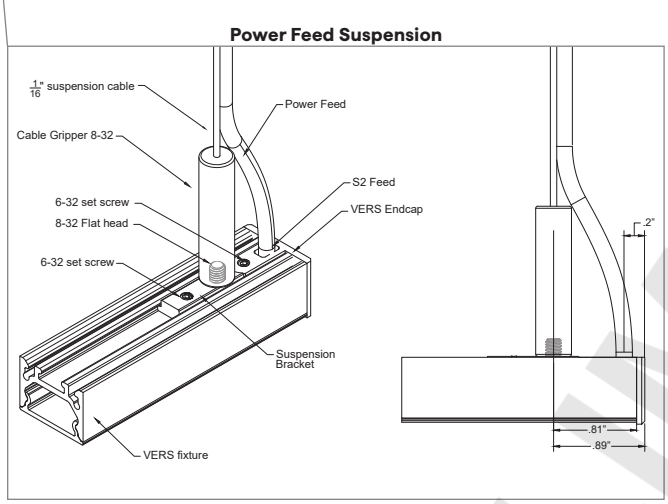
PRELIMINARY
SUBJECT TO CHANGE

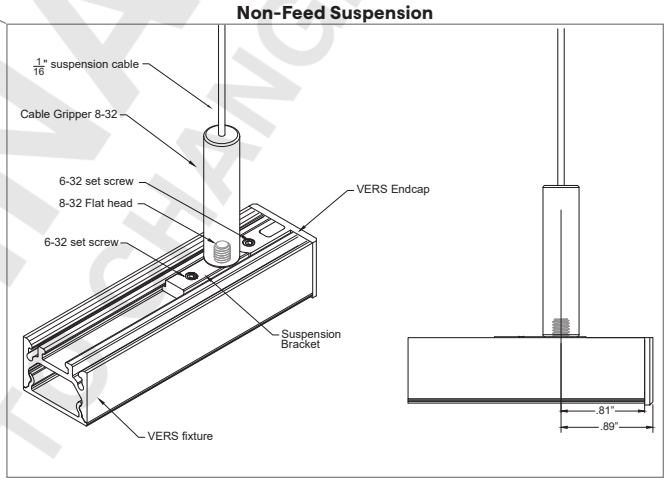
© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

# VERS-SK


Linear Fixtures - Suspended

## MOUNTING

- Maximum single fixture length: 98"
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25" in middle without additional support.
- Shop drawings required for run lengths over 8ft
- Any double fed fixture will come with double feed joiner and inline bracket

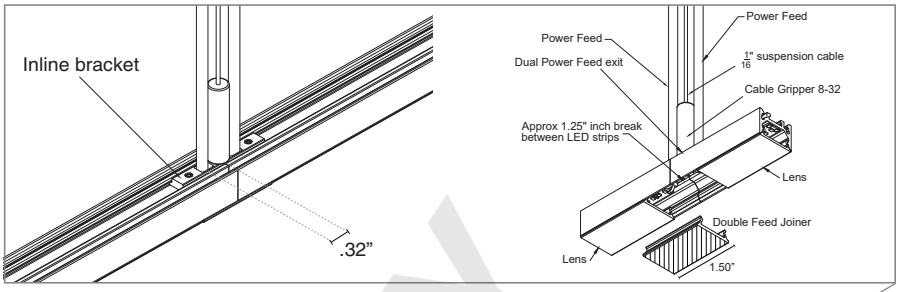


**12FT**

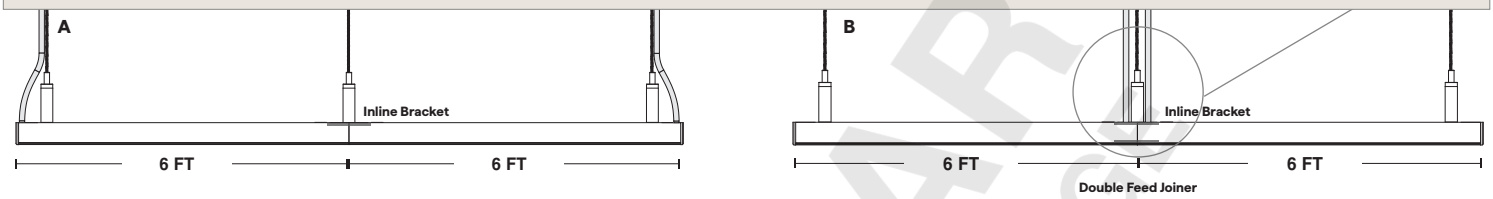




**Part number example for a suspended VERS-01 dry rated static white fixture with a diffused lens in 1.5W/ft, 3000K, in a satin finish:**

**A** VERS-01-SK-SW-1.5-30-DRY-DF-N/A-S2-BW-CLS-SV-AWM-SK-ST-144" (1X)
SK-SF-RD-5"-WH-JB-36" (2X)
SK-NF-RD-5"-WH-JB-36" (1X)


**B** VERS-01-SK-SW-1.5-30-DRY-DF-N/A-S2-BW-CLS-SV-AWM-SK-ST-144" (1X)
SK-DF-RD-5"-WH-JB-36" (1X)
SK-NF-RD-5"-WH-JB-36" (2X)


**BETWEEN 8FT and 16FT**

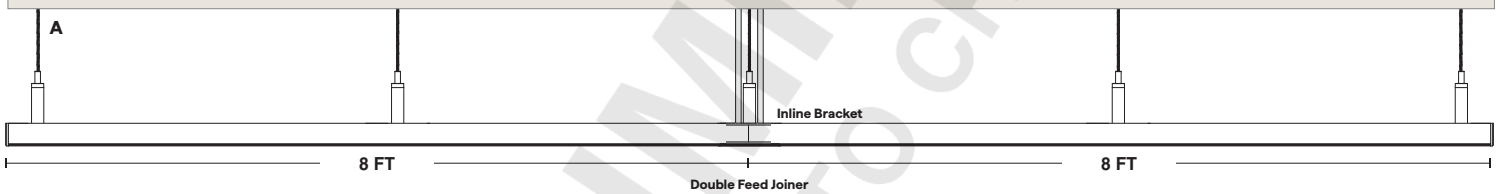

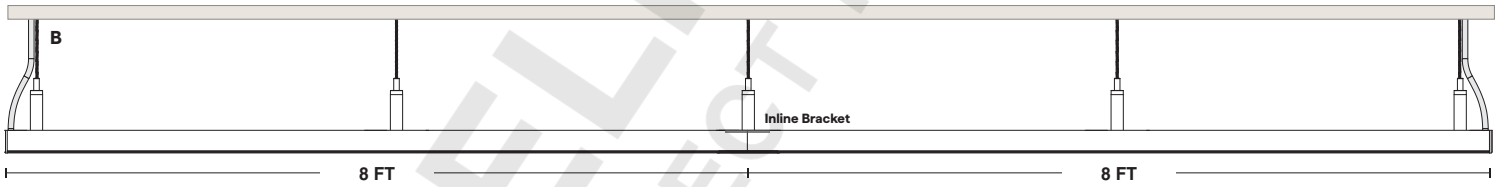
**32FT**

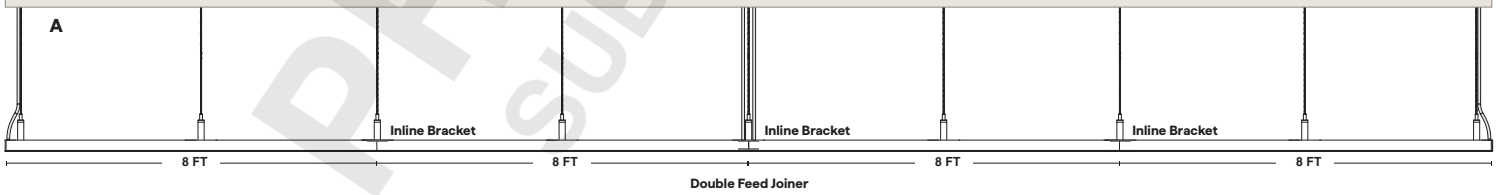


PRELIMINARY
SUBJECT TO CHANGE

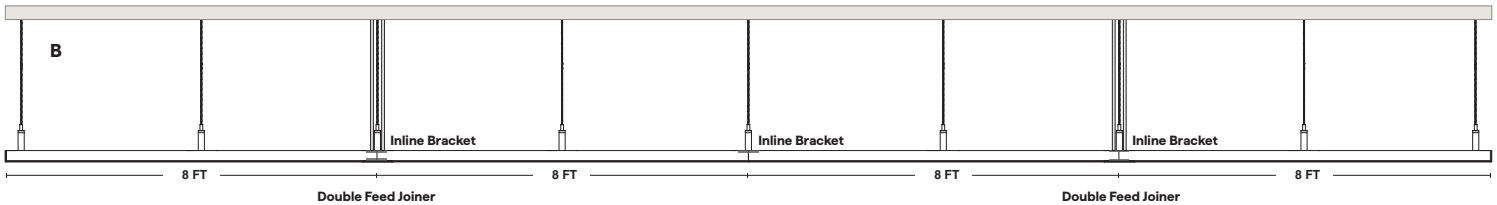
© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


# VERS-SK

Linear Fixtures - Suspended


## SUSPENSION T-BAR POWER FEED ASSEMBLY

SK-SF-RD-5-**-TB-36

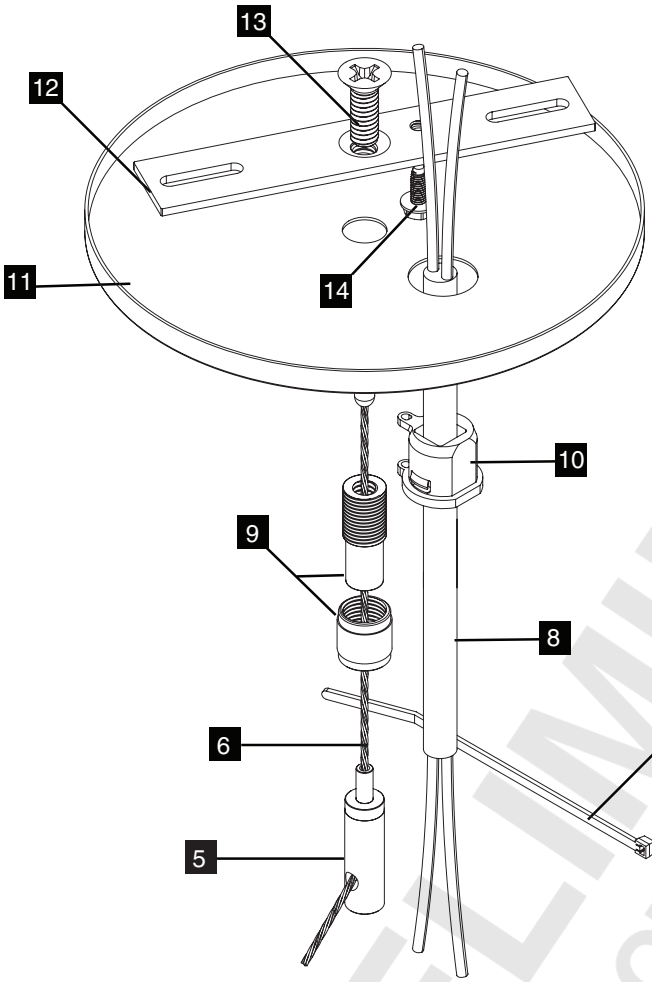

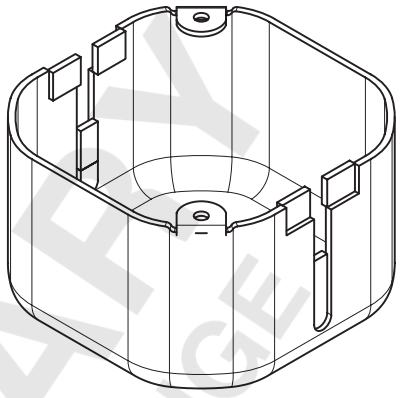15 T-Bar mounted Junction Box

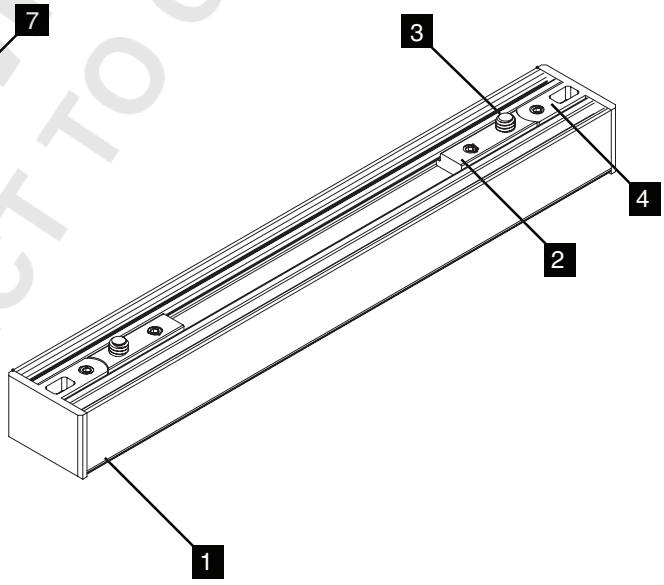


PRELIMINARY
SUBJECT TO CHANGE

VERS SUSPENSION COMPONENTS

| | | | | | | |
|---|---|---|---|---|---|---|
| 1 VERS | 2 Suspension Bracket | 3 8-32 Screw | 4 Endcap | 5 Cable Gripper | 6 1/16” Cable | 7 Tie |
| 8 Lead Wire | 9 Cable Coupler | 10 Strain Relief | 11 Canopy | 12 Crossbar | 13 1/4”-20 | 14 Ground Screw |

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting


# VERS-SK

Linear Fixtures - Suspended

## SUSPENSION POWER FEED ASSEMBLY - TO MOUNT TO JUNCTION BOX*

*JUNCTION BOX NOT INCLUDED

SK-SF-RD-5-**-JB-36

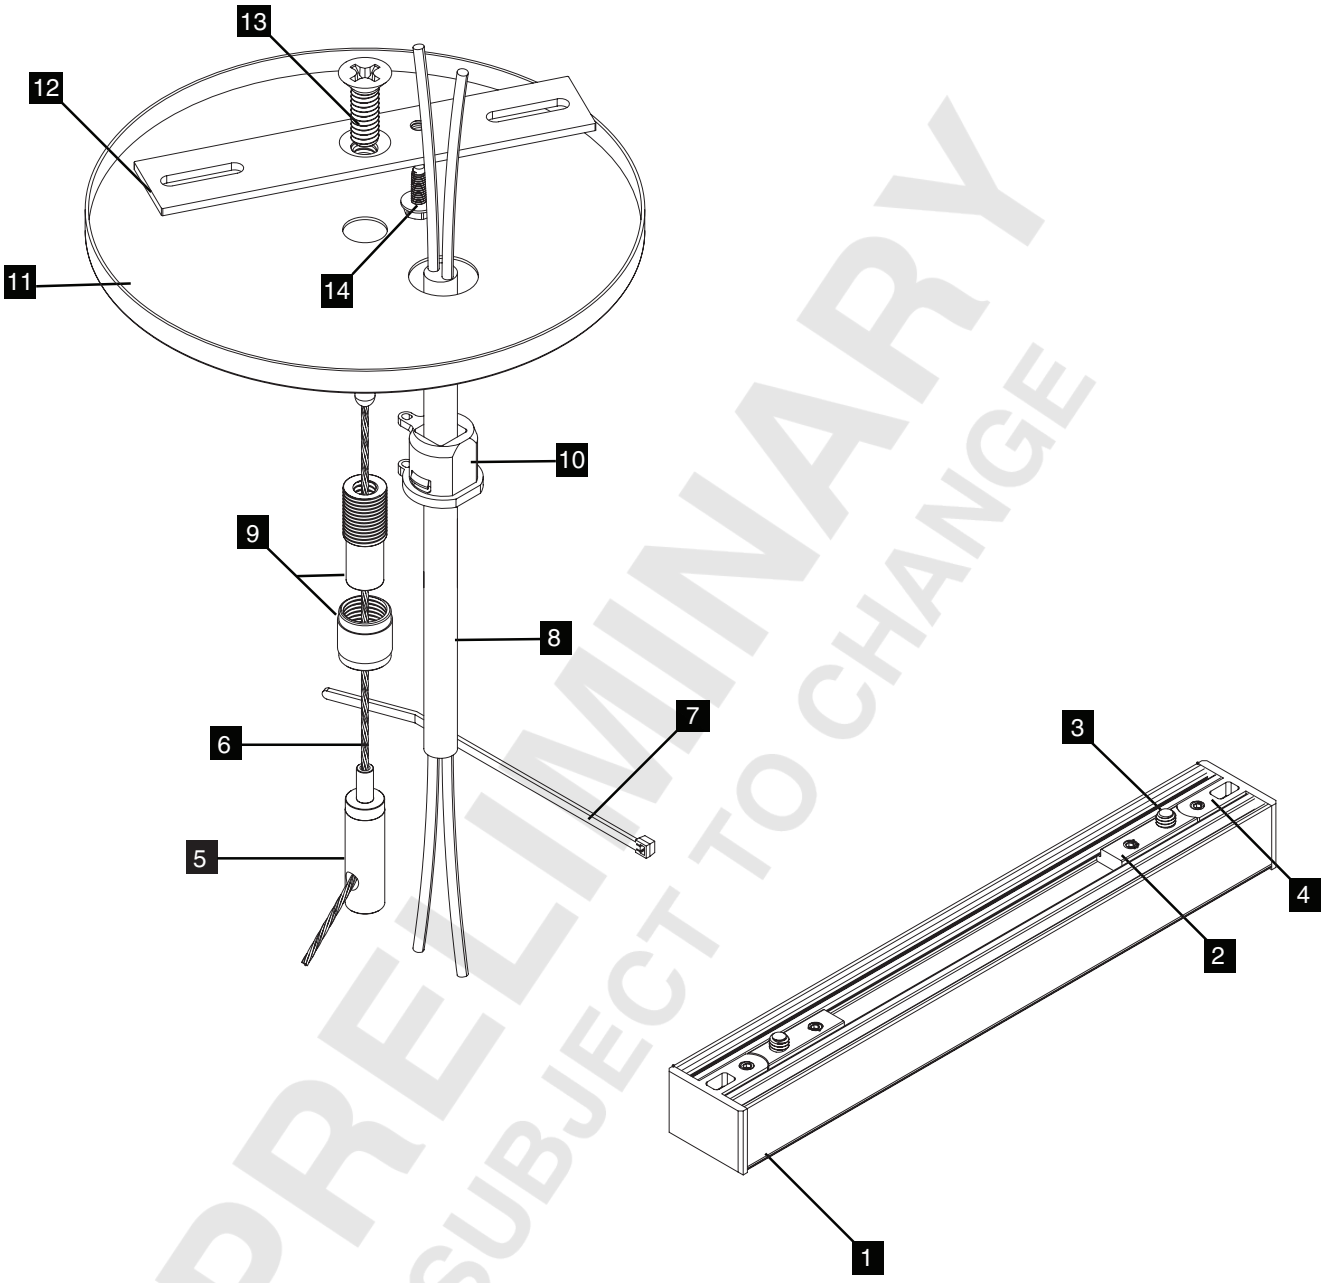


PRELIMINARY
SUBJECT TO CHANGE


### VERS SUSPENSION COMPONENTS

| | | | | | | |
|---|---|---|---|---|---|---|
| 1 VERS | 2 Suspension Bracket | 3 8-32 Screw | 4 Endcap | 5 Cable Gripper | 6 1/16” Cable | 7 Tie |
| 8 Lead Wire | 9 Cable Coupler | 10 Strain Relief | 11 Canopy | 12 Crossbar | 13 1/4”-20 | 14 Ground Screw |

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

## SUSPENSION T-BAR NON-FEED ASSEMBLY

SK-NF-RD-2-NF-*-TB-36

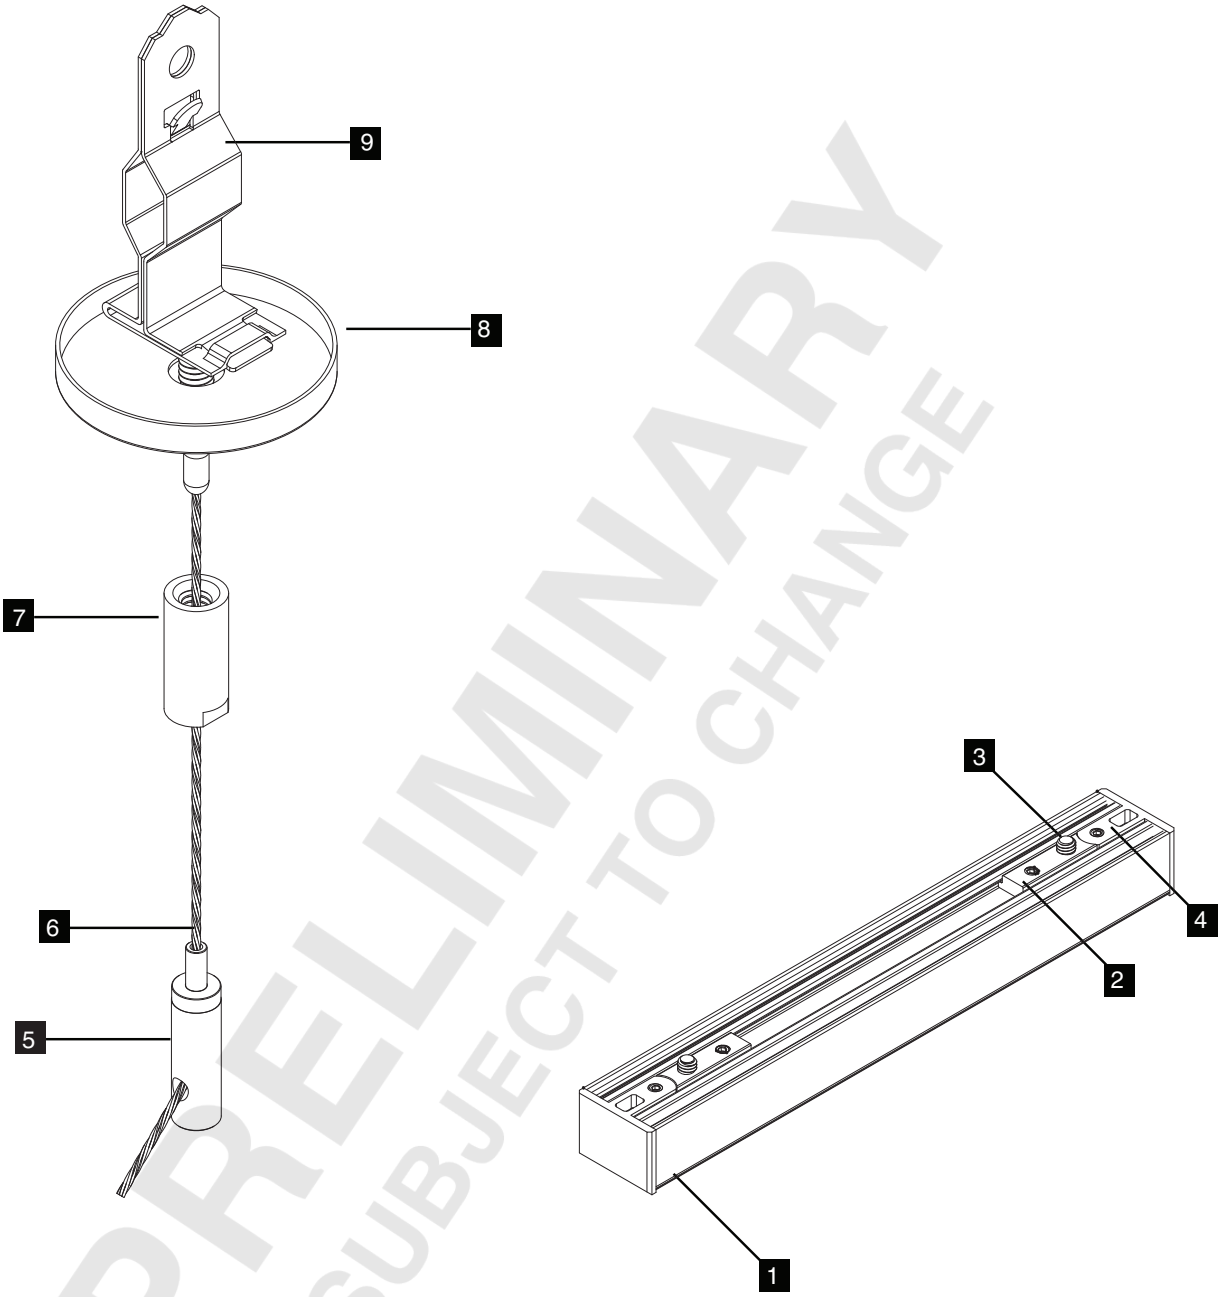


PRELIMINARY
SUBJECT TO CHANGE


NON-POWERED FEED KIT

| | | | | |
|---|---|---|---|---|
| 1 VERS | 2 Suspension Bracket | 3 8-32 Screw | 4 Endcap | 5 Cable Gripper |
| 6 1/16” Cable | 7 Cable Coupler | 8 Canopy | 9 T-Bar Clip | |

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

## LAG SCREW NON-FEED ASSEMBLY

SK-NF-RD-2-NF-*-LS-36

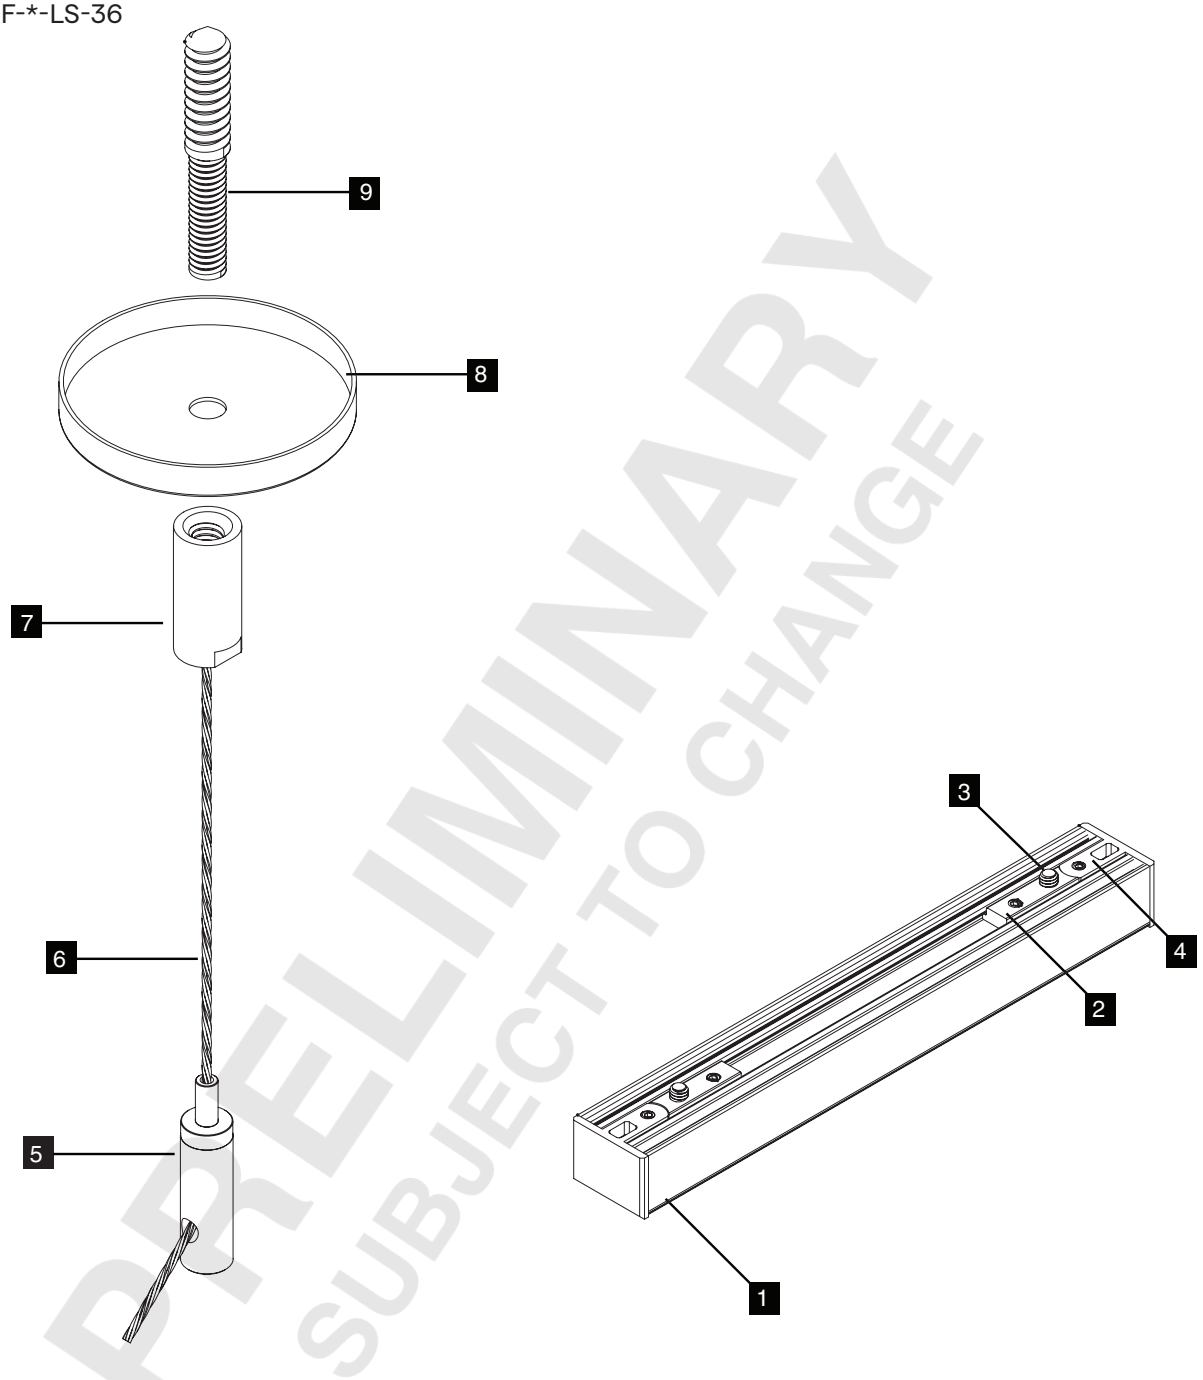


PRELIMINARY
SUBJECT TO CHANGE

NON-POWERED FEED KIT

| | | | | |
|---|---|---|---|---|
| 1 VERS | 2 Suspension Bracket | 3 8-32 Screw | 4 Endcap | 5 Cable Gripper |
| 6 1/16” Cable | 7 Cable Coupler | 8 Canopy | 9 Lag Screw | |

© 2024 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting