




# VERS-ASYMMETRIC-SK (09) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Suspended

white optics<sup>®</sup>CUL US  
LISTEDRoHS  
COMPLIANTEPD  
ENVIRONMENTAL  
PRODUCT DECLARATIONJAB-2019  
HE only5 YEAR  
WARRANTYBAA & BABA  
CONTACT FACTORY

- 80 Suspension Kit configurations allow fixture to be seamlessly incorporated into any interior
- Create long, continuous lines of light with easy-to-use inline bracket and double feed joiner connectors
- This VERSatile fixture directs the light in an asymmetrical direction without having to angle the fixture, making it an excellent solution for illuminating artwork, signage, or providing illumination on a ceiling
- Features an extruded asymmetric lens with a proprietary diffusing agent that allows the light to be focused in a tight 45° beam that is shifted 30° off center
- Features integrated metal endcaps and durable anodized aluminum housings
- With standard internal White Optics coating, fixtures achieve greater lumen efficacies
- Consult factory for field assembly options
- Optional external louver accessory available in white or black for added glare control

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER
VERS-09-SK-DW			DRY	ASYM	

## ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
	BW	CLS	SV	AWM	SK			

Sample Part Number: VERS-09-DW-2.5HE-20/30-DRY-ASYM-P1A-CON6-CON6-BK-CL2-MG-BK-48"-E

<b>1</b> <b>PRODUCT</b>  VERS-09-SK-DW  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE	<b>3</b> <b>CCT</b>  20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K	<b>4</b> <b>RATED</b>  DRY IP20	<b>5</b> <b>LENS</b>  ASYM Asymmetric  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.	<b>6</b> <b>EXTERNAL LOUVER</b>  L1-WH White Plastic L1-BK Black Plastic N/A No Louver  Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. White and custom painted finishes are not compatible with external louvers.
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  SINGLE (Input Only) S2A Bottom Feed S2B Bottom Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 36")  BW: Standard length is 36", max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)	<b>10</b> <b>WIRE COLOR</b>  SV Silver		
<b>11</b> <b>WIRE TYPE</b>  AWM Appliance Wiring Material	<b>12</b> <b>MOUNTING</b>  SK Suspension Bracket	<b>13</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze WH White CU Custom  White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory.	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# VERS-ASYMMETRIC-SK (09) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Suspended

## 1 PRODUCT - DIMENSIONS

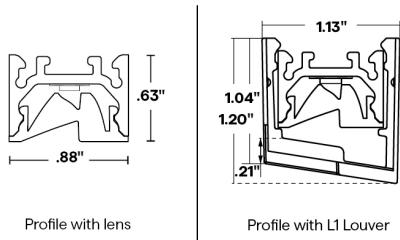


## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with VERS-09-SK-DW-\*\*-\*\*-DRY

	2.5HE W/FT									
	2000K		2700K		3000K		4000K		5500K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
ASYM	192	93	218	98	223	98	227	97	254	97


## 5 DIODE VISIBILITY



ASYM - Asymmetric lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



## TEMPERATURE RATINGS

		DW 1.5 HE W/FT				DW 2.5 HE W/FT			
		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply	
		Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	120°F
DMP	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F
WET	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F





## VERS-ASYMMETRIC-SK (09) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Suspended

### 6 EXTERNAL LOUVER

PLASTIC

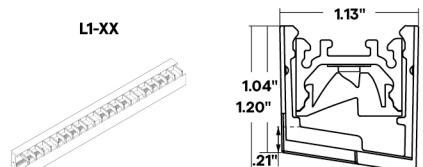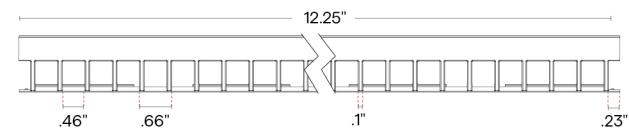

Lumen Multiplier  
WH BK







0.63 0.43

Profile with plastic louver

### 7 WIRE INPUT/ OUTPUT

### CONFIGURATION OPTIONS


ASYMMETRIC ONLY SINGLE (Input only)

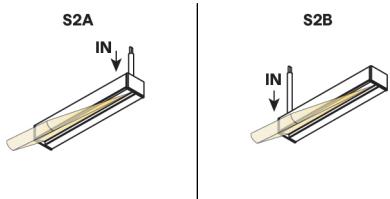

### 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.

BW



Bare Wire 36" | 22 AWG  
Clear outer jacket, metal shield

### 10 WIRE COLOR




Silver



# VERS-ASYMMETRIC-SK (09) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Suspended

## 12 MOUNTING



Suspension Bracket

2 required up to 6' lengths;  
additional support required  
between 6' to 8'

## 13 FINISH




Custom finishes require a longer  
lead time, consult factory

## 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

### Optimal Fixtures

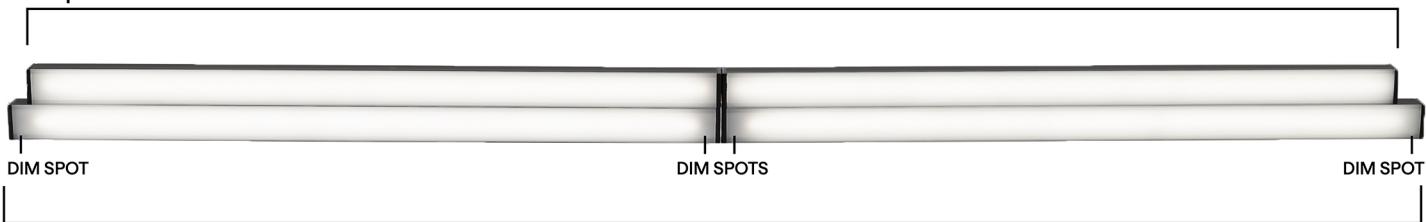

### Exact Fixtures

## DW-HE DRY LENGTHS BY INCH

Available in any length in between 24" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $\pm 0 - 1/8"$ . Consult factory for lengths under 24".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S2A/B S2
12"	10.59"
13"	12.59"
14"	12.59"
15"	14.59"
16"	14.59"
17"	16.59"
18"	16.59"
19"	18.59"
20"	18.59"
21"	20.59"
22"	20.59"
23"	22.59"
24"	22.59"
36"	34.59"
48"	46.59"
60"	58.59"
72"	70.59"
84"	82.59"
96"	94.59"



# VERS-ASYMMETRIC-SK (09) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Suspended


## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle

DIMMING PROTOCOL	INDOOR
	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle

## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature  
junction box, DRY/DMP  
(WET rated with silicone)



# VERS-ASYMMETRIC-SK (09) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Suspended

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



Wi-Fi or Bluetooth  
Connectivity

## COMPATIBLE APPS

### NFC APP



Read and write  
DMX addresses and  
adjust voltage