



VERS-NANO-LOUVER-SK (11) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Suspended

white optics®
LISTED

UL
US
LISTED

RoHS
COMPLIANT
EPD
ENVIRONMENTAL
PRODUCT DECLARATION

5 YEAR
WARRANTY

BAA & BABA
DW-HE ONLY
CONTACT FACTORY



- Features a co-extruded lens with integrated louvers that provide 35° viewing angles, delivering exceptional glare control ideal for direct view applications.
- 80 Suspension Kit configurations allow fixture to be seamlessly incorporated into any interior.
- Create long, continuous lines of light with easy-to-use inline bracket and double feed joiner connectors.
- The Crosswise louver reduces end-view glare while the Lengthwise louver reduces side-view glare.
- Lens options include frosted or diffused finishes to suit various lighting requirements.
- Integrated metal endcaps combined with extruded aluminum housing give this LED fixture a polished modern look.
- White Optics, an internal coating that results in greater lumen output, comes standard in all VERS LED fixtures.
- Consult factory for field assembly options.

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 INTERNAL LENS	6 INTERNAL LOUVER
				DF	

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
	BW	CLS	SV	AWM	SK			

Sample Part Number: VERS-11-SK-WD-6.0-19/30-DRY-DF-C-S2A-CON6-CON6-BK-CL2-MG-BK-48"-E

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 INTERNAL LENS	6 INTERNAL LOUVER
VERS-11-SK-WD LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies.	6.0 6.0W/ft	19/27 1900K/2700K 19/30 1900K/3000K	DRY IP20	DF Diffused Internal For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.	
VERS-11-SK-DW LED engine is built with 3 wires requiring 0-10v, DMX or DALI control. Using DALI, DMX, or non-Q-Tran power supplies may double watts/ft. See last page for compatible power supplies.	1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE	20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K	DRY IP20		C Crosswise Internal L Lengthwise Internal Louver slats are angled. Refer to diagrams to identify the side of the fixture with the most visual cutoff.
	1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	24/30 2400K/3000K 27/40 2700K/4000K	DMP IP54		
7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR		
SINGLE (Input Only) S2A Bottom Feed S2B Bottom Feed	BW Bare Wire (Standard 36") BW: Standard length is 36", max length is 120". Request custom length by writing in part number next to BW (example: BW48)	CLS Closed End (No feed)	SV Silver		
11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/OPTIMAL	
AWM Appliance Wiring Material	SK Suspension Bracket	ST Satin BK Black BZ Bronze WH White CU Custom	Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	O Optimal Illumination E Exact Specified Length	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



VERS-NANO-LOUVER-SK (11) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Suspended

1 PRODUCT - DIMENSIONS



Profile with lens

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with VERS-11-SK-WD-6.0-**-DRY

3000K	6.0 W/FT		
	LM/FT	CRI	UGR
DF-C	95	97	≤ 14.4
DF-L	114	97	≤ 17.5

[Calculated L70 = 70000 hrs]
Tested with VERS-11-SK-DW-**-**-DRY

3000K	1.5HE W/FT			2.5HE W/FT			4.0HE W/FT		
	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR
DF-C	36	98	≤ 11.0	60	98	≤ 12.8	80	99	≤ 13.8
DF-L	43	98	≤ 14.3	71	98	≤ 15.9	99	98	≤ 17.4


5 DIODE VISIBILITY



DF - Diffused lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



TEMPERATURE RATINGS

		DW 1.5 HE W/FT						DW 2.5 HE W/FT				DW 4.0 HE W/FT			
		WD 6.0 W/FT		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	110°F
DMP	Ambient Operating Temp - Surface	—	—	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—




VERS-NANO-LOUVER-SK (11) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Suspended


6 INTERNAL LOUVER

INTERNAL LOUVER - LENGTHWISE

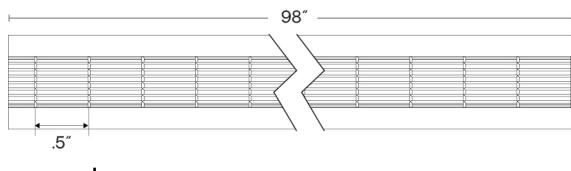

L

INTERNAL LOUVER - CROSSWISE

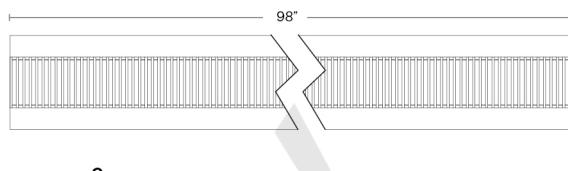


C

7 WIRE INPUT/OUTPUT

SINGLE (Input only)



Reduced Side View Glare - Louver slats are angled towards one side of the fixture. Refer to diagrams to identify the side of the fixture with the most visual cutoff.

S2A




Bottom Feed - Front

CONFIGURATION OPTIONS



Continuous Row End Feeds




Continuous Row Center Feeds

8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product.

BW
For WD



Bare Wire 36" | 22 AWG
Clear outer jacket, metal shield

BW
For DW-HE



Bare Wire 36" | 22 AWG
Clear outer jacket, metal shield

10 WIRE COLOR




Silver



VERS-NANO-LOUVER-SK (11) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Suspended

12 MOUNTING



2 required up to 6' lengths;
additional support required
between 6' to 8'

13 FINISH




Finish is only applicable to the
aluminum extrusion and
endcaps. The Cover Lens and
Internal Louver is always black.
Custom finishes require a longer
lead time, consult factory.

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

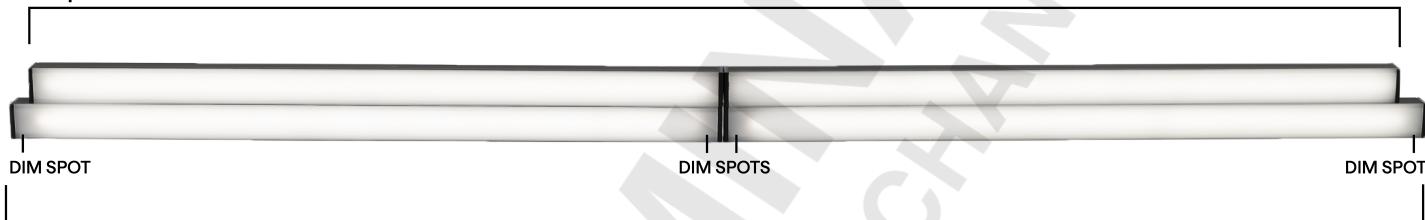

Exact Fixtures

WD DRY, DMP LENGTHS BY INCH

Available in any length in between 24" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $\pm 0 - 1/8"$. Consult factory for lengths under 24".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S2 S2 IN	
12"	10.49"	
13"	12.49"	
14"	12.49"	
15"	14.49"	
16"	14.49"	
17"	16.49"	
18"	16.49"	
19"	18.49"	
20"	18.49"	
21"	20.49"	
22"	20.49"	
23"	22.49"	
24"	22.49"	
36"	34.49"	
48"	46.49"	
60"	58.49"	
72"	70.49"	
84"	82.49"	
96"	94.49"	



VERS-NANO-LOUVER-SK (11) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Suspended

DW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 24" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 24".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S2 S2 IN ↓
12"	10.59"
13"	12.59"
14"	12.59"
15"	14.59"
16"	14.59"
17"	16.59"
18"	16.59"
19"	18.59"
20"	18.59"
21"	20.59"
22"	20.59"
23"	22.59"
24"	22.59"
36"	34.59"
48"	46.59"
60"	58.59"
72"	70.59"
84"	82.59"
96"	94.59"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle




VERS-NANO-LOUVER-SK (11) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Suspended

DIMMING PROTOCOL	INDOOR	
	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN
ECO System		QTM-eLED(E)
DMX If using DW LED, wattage must be doubled		QZ-DMX
DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle

COMPATIBLE WIRING ACCESSORIES

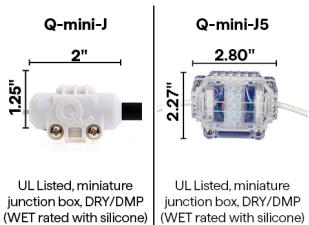

COMPATIBLE CONTROL ACCESSORIES





VERS-NANO-LOUVER-SK (11) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Suspended

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage

PRELIMINARY
SUBJECT TO CHANGE