
VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed





- Optically enhanced VERSatile fixture with narrow grazing properties ranging from 12° to 36°
- The high-quality lens features a proprietary diffusing agent for superior beam control and clean edges
- Durable anodized aluminum housings with integrated metal endcaps
- With an internal White Optics coating, the fixture achieves greater lumen output
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: **VERS-04-WD-6.0-19/30-DRY-GZR-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48”-E**

1 PRODUCT

VERS-04-DW
VERS-04-DW-USA

Select USA option for BAA and BABA projects. Only DRY, PENC, or WET ratings apply.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

VERS-04-WD

LED engine is built with 2 wires suitable for phase dimming control.
See following pages for compatible power supplies.

2 WATTS/FT

1.5HE 1.5W/ft HE
2.5HE 2.5W/ft HE
4.0HE 4.0W/ft HE

1.5HE 1.5W/ft HE
2.5HE 2.5W/ft HE

1.5HE 1.5W/ft HE
2.5HE 2.5W/ft HE

6.0 6.0W/ft

3 CCT

18/30 1800K/3000K
18/35 1800K/3500K
20/27 2000K/2700K
20/30 2000K/3000K
24/40 2400K/4000K
27/40 2700K/4000K
27/55 2700K/5500K

18/30 1800K/3000K
18/35 1800K/3500K
20/27 2000K/2700K
20/30 2000K/3000K
24/40 2400K/4000K
27/40 2700K/4000K
27/55 2700K/5500K

22/30 2200K/3000K
22/35 2200K/3500K
27/40 2700K/4000K
24/40 2400K/4000K

19/27 1900K/2700K
19/30 1900K/3000K

4 RATED

DRY IP20

DMP IP54
WET IP67

Can be suitable for exterior use. contact factory for more information

PENC IP67

DRY IP20
DMP IP54
WET IP67

Can be suitable for exterior use. contact factory for more information

5 LENS

25D Optical 25°
GZR Grazer

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

6 EXTERNAL LOUVER

L1-WH White Plastic
L1-BK Black Plastic
L2-ST Satin Anodized Aluminum
L2-BK Black Anodized Aluminum
L2-WH White Powder Coated Aluminum
N/A No Louver

Plastic Louvers come in 12” lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98” lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.

7 WIRE INPUT/OUTPUT

SINGLE (Input only)
S1 End Feed
S2 Bottom Feed
S3 Left Side Feed
S4 Right Side Feed

PASS THROUGH (Input/output)
P1 End Feed
P2 Bottom Feed
P3 Left Side Feed
P4 Right Side Feed

Pass Through options are not available for PENC rating. When using TBC Mounting, a bare wire P2 wire feed is recommended. See install instructions for details.

8 CONNECTOR/WIRE IN

BW Bare Wire (Standard 36”)
CON6 Connector 6”
CON24 Connector 24”

BW Bare Wire (Standard 36”)
CON6 Connector 6”
CON24 Connector 24”

BW: Standard length is 36”, Max length is 120”. Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

CLS Closed End (No feed)

BW Bare Wire (Standard 36”)
CON6 Connector 6”
CON24 Connector 24”

BW: Standard length is 36”, Max length is 120”. Request custom length by writing in part number next to BW (example: BW48)

10 WIRE COLOR

WH White
BK Black

11 WIRE TYPE

CL2 Class 2
CL2P Plenum Rated

CL2P only available with bare wire leads (BW)

12 MOUNTING

CC Concealed Clip
MG Magnet
TBC-03 9/16” Flat TB-Grid
TBC-04 15/16” Flat or Tegular TB-Grid
TBC-05 9/16” Tegular TB-Grid or 9/16” Flat TB-Grid, with External Louver
TBC-06 9/16” Tegular TB-Grid, with External Louver
TBC-07 15/16” Flat TB-Grid, with External Louver
TBC-08 15/16” Tegular TB-Grid, with External Louver

13 FINISH

ST Satin
BK Black
BZ Bronze
WH White
CU Custom

White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.

14 LENGTH (IN)

Minimum length is 12”, maximum length is 98” not including end caps. Contact us for lengths under 12”.

15 EXACT/OPTIMAL

O Optimal Illumination
E Exact Specified Length

Exact fixtures are the exact length specified +0 -1/8”. Optimal fixtures’ length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-11-11-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with GZR lens




Profile with 25D lens




Profile with GZR lens and PENC rating (partial encapsulation)




Profile with 25D lens and PENC rating (partial encapsulation)




Profile with GZR lens & concealed clip




Profile with 25D lens & concealed clip




Profile with GZR lens & magnetic clip




Profile with 25D lens & magnetic clip




Profile with GZR lens, magnet mount clip & magnetic mount accessory




Profile with 25D lens, magnet mount clip & magnetic mount accessory




Profile with louver




Profile with concealed clip and louver




Profile with magnetic clip and louver




Profile with magnet mount clip, magnetic mount accessory & louver




Profile with TBC-05 & louver



Profile with TBC-06 & louver



Profile with TBC-07 & louver



Profile with TBC-08 & louver

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with VERS-04-DW-**-30-DRY

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
GZR	169	98	266	98	411	98
25D	162	98	256	98	385	98

[Calculated L70 = 70000 hrs]
Tested with VERS-04-WD-**-30-DRY

	6.0 W/FT	
	LM/FT	CRI
GZR	502	97
25D	485	97

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26

VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

5 DIODE VISIBILITY




Optical lens

GZR - Grazer lens


PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

6W/ft Grazer lens



6W/ft 25D lens




TEMPERATURE RATINGS


		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT			
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		WD 6.0 W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	110°F	-4°F	115°F
DMP	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	120°F	—	—	—	—	-4°F	115°F
WET	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—	-4°F	110°F
PENC	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F	—	—	—	—	—	—


6 EXTERNAL LOUVER

PLASTIC

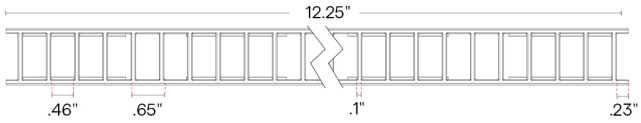

L1-XX






Profile with plastic louver


Lumen Multiplier


WH	BK
0.71	0.48

METAL

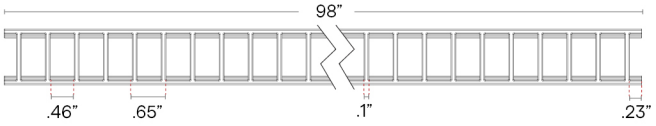

L2-XX





Profile with metal louver

Lumen Multiplier

WH	BK	ST
0.72	0.53	0.68


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

VERS-GRAZER (04) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

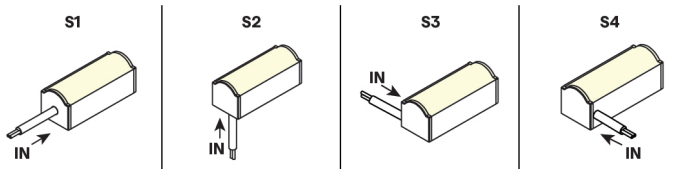

PASS THROUGH (Input/Output)

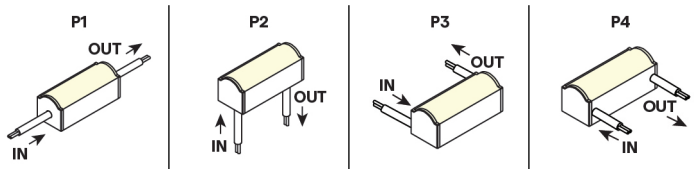


CONFIGURATION OPTIONS

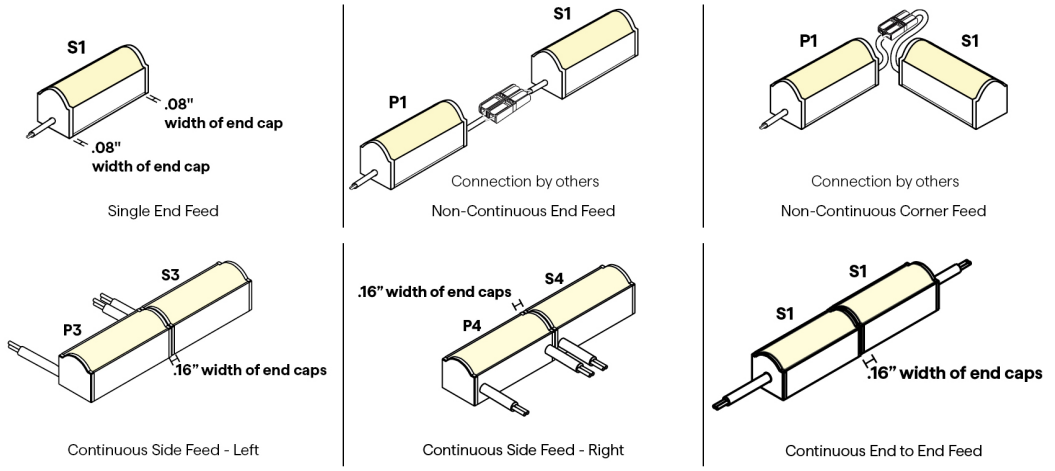

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.

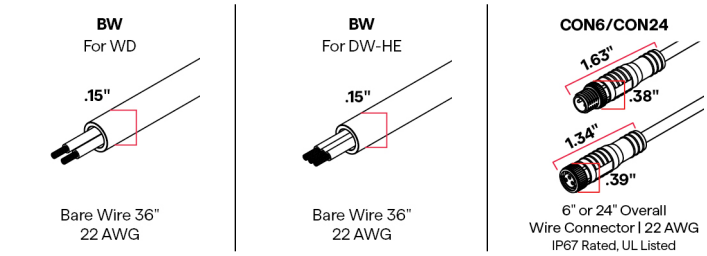

10 WIRE COLOR



© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-11-11-26

VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

12 MOUNTING

CC
(CC-01)




Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

CC
(CC-02)



Louver Concealed Clip
Required if L1 or L2 Louver is selected

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-02 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

MG




Magnet Clip

One MG provided per foot

To order separately use MG-02

MMA-02




Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02

Each clip comes with a #6 Flat Screw

Required when mounting to a non-magnetic surface

TBC-03



Plastic T-Bar Clip


Use on 9/16" Flat Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-03

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-04



Plastic T-Bar Clip


Use on 15/16" Flat or Tegular Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-04

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-05



Plastic T-Bar Clip


Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-05

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-06



Plastic T-Bar Clip


Use with Louver on 9/16" Tegular Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-06

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-07



Plastic T-Bar Clip


Use with Louver on 15/16" Flat Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-07

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-08



Plastic T-Bar Clip

Use with Louver on 15/16" Tegular Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-08

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

13 FINISH



Satin

Black

Bronze

White

White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.


© 2026 QTL. All rights reserved

VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.




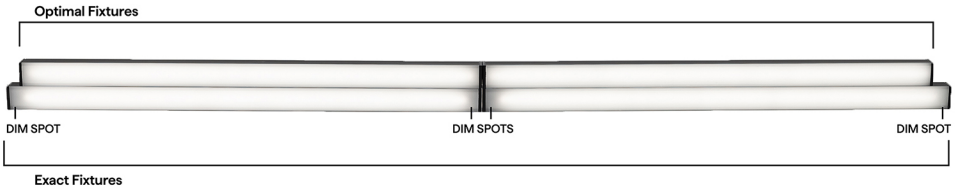


DW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.59"	10.94"	10.49"	10.59"
13"	12.59"	12.94"	12.49"	12.59"
14"	12.59"	12.94"	12.49"	12.59"
15"	14.59"	14.94"	14.49"	14.59"
16"	14.59"	14.94"	14.49"	14.59"
17"	16.59"	16.94"	16.49"	16.59"
18"	16.59"	16.94"	16.49"	16.59"
19"	18.59"	18.94"	18.49"	18.59"
20"	18.59"	18.94"	18.49"	18.59"
21"	20.59"	20.94"	20.49"	20.59"
22"	20.59"	20.94"	20.49"	20.59"
23"	22.59"	22.94"	22.49"	22.59"
24"	22.59"	22.94"	22.49"	22.59"
36"	34.59"	34.94"	34.49"	34.59"
48"	46.59"	46.94"	46.49"	46.59"
60"	58.59"	58.94"	58.49"	58.59"
72"	70.59"	70.94"	70.49"	70.59"
84"	82.59"	82.94"	82.49"	82.59"
96"	94.59"	94.94"	94.49"	94.59"


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

VERS-GRAZER (04) FOR WARM DIM APPLICATIONS






24VDC Linear Fixtures - Surface & Recessed

DW-HE WET LENGTHS BY INCH

EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture
	 End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH






Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	 End Feed	 Bottom Feed	 End Feed	 Bottom Feed	 Side Feed - Left	 Side Feed - Right	 Side Feed - Left	 Side Feed - Right
12"	10.74"		11.14"		10.64"		10.84"	
13"	12.74"		11.14"		12.64"		12.84"	
14"	12.74"		13.14"		12.64"		12.84"	
15"	14.74"		13.14"		14.64"		14.84"	
16"	14.74"		15.14"		14.64"		14.84"	
17"	16.74"		15.14"		16.64"		16.84"	
18"	16.74"		17.14"		16.64"		16.84"	
19"	18.74"		17.14"		18.64"		18.84"	
20"	18.74"		19.14"		18.64"		18.84"	
21"	20.74"		19.14"		20.64"		20.84"	
22"	20.74"		21.14"		20.64"		20.84"	
23"	22.74"		21.14"		22.64"		22.84"	
24"	22.74"		23.14"		22.64"		22.84"	
36"	34.74"		35.14"		34.64"		34.84"	
48"	46.74"		47.14"		46.64"		46.84"	
60"	58.74"		59.14"		58.64"		58.84"	
72"	70.74"		71.14"		70.64"		70.84"	
84"	82.74"		83.14"		82.64"		82.84"	
96"	94.74"		95.14"		94.64"		94.84"	

WD DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	 End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	 End Feed	 Bottom Feed	 End Feed	 Bottom Feed	 Side Feed - Left	 Side Feed - Right	 Side Feed - Left	 Side Feed - Right
12"	10.49"		10.74"		10.34"		10.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	12.49"		12.74"		12.34"		12.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	14.49"		14.74"		14.34"		14.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	16.49"		16.74"		16.34"		16.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	18.49"		18.74"		18.34"		18.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	20.49"		20.74"		20.34"		20.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	22.49"		22.74"		22.34"		22.44"	
36"	34.49"		34.74"		34.34"		34.44"	
48"	46.49"		46.74"		46.34"		46.44"	
60"	58.49"		58.74"		58.34"		58.44"	
72"	70.49"		70.74"		70.34"		70.44"	
84"	82.49"		82.74"		82.34"		82.44"	
96"	94.49"		94.74"		94.34"		94.44"	

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-11-11-26

VERS-GRAZER (04) FOR WARM DIM APPLICATIONS






24VDC Linear Fixtures - Surface & Recessed

WD WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	 End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	 End Feed	 Bottom Feed	 End Feed	 Bottom Feed	 Side Feed - Left	 Side Feed - Right	 Side Feed - Left	 Side Feed - Right
12"	10.69"		10.84"		10.59"		10.69"	
13"	12.69"		12.84"		12.59"		12.69"	
14"	12.69"		12.84"		12.59"		12.69"	
15"	14.69"		14.84"		14.59"		14.69"	
16"	14.69"		14.84"		14.59"		14.69"	
17"	16.69"		16.84"		16.59"		16.69"	
18"	16.69"		16.84"		16.59"		16.69"	
19"	18.69"		18.84"		18.59"		18.69"	
20"	18.69"		18.84"		18.59"		18.69"	
21"	20.69"		20.84"		20.59"		20.69"	
22"	20.69"		20.84"		20.59"		20.69"	
23"	22.69"		22.84"		22.59"		22.69"	
24"	22.69"		22.84"		22.59"		22.69"	
36"	34.69"		34.84"		34.59"		34.69"	
48"	46.69"		46.84"		46.59"		46.69"	
60"	58.69"		58.84"		58.59"		58.69"	
72"	70.69"		70.84"		70.59"		70.69"	
84"	82.69"		82.84"		82.59"		82.69"	
96"	94.69"		94.84"		94.59"		94.69"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT6-PS QOM-eLED+DALI-DT8 QOM-eLED+DALI-DT8-PS QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT6-PS QZ-DMX QZ-PRO-PH/0-10V
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QZ-DW	Q-SET-QZ-PH/0-10V QZ-PRO-PH/0-10V
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PRO-PH/0-10V
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN		
ECO System		QTM-eLED(E)		
DMX If using DW LED, wattage must be doubled		QZ-DMX		QZ-DMX
DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QOM-eLED+DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8		Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		


COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M



Adjustable mounting bracket - Medium

HINGE - HMB-L



Adjustable mounting bracket - Large

HINGE - HMB-XL



Adjustable mounting bracket - XLarge

Q-PIVOT



Small mounting accessory

Q-ANGLE



Adjustable mounting accessory

NU-GRAZER




U Mounting Bracket

NJ-GRAZER




J Mounting Bracket

BL-GRAZER



Backwards L Mounting Bracket

MMA-02



Magnet Mount Accessory for MG-02


COMPATIBLE WIRING ACCESSORIES

Q-mini-J



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26

VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting