
VERS-LOUVER (07) RGBW

24VDC Linear Fixtures - Surface & Recessed





- A VERSatile fixture with a black louver that is designed to mitigate diode imaging and glare
- Features integrated metal endcaps
- Mounting options include a concealed clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER
					N/A

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: **VERS-07-RGBW-6.0-RGBW-30-DRY-DF-P1-BW-BW-BK-CL2-CC-BK-48"-E**

1 PRODUCT

VERS-07-RGBW	See following pages for compatible power supplies.
VERS-07-RGBW	

2 WATTS/FT

6.0	6.0W/ft
4.0HE	4.0W/ft HE
8.0HE	8.0W/ft HE
4.0HE	4.0W/ft HE

3 CCT

27	RGBW-2700K
30	RGBW-3000K
27	RGBW-2700K
30	RGBW-3000K
35	RGBW-3500K
40	RGBW-4000K
27	RGBW-2700K
30	RGBW-3000K
35	RGBW-3500K
40	RGBW-4000K

4 RATED

DRY	IP20
DMP	IP54
DRY	IP20
DMP	IP54

5 LENS

DF	Diffused
CL	Clear

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.

6 EXTERNAL LOUVER

N/A	Internal Louver included

7 WIRE INPUT/OUTPUT

SINGLE (Input only)	
S1	End Feed
S2	Bottom Feed
PASS THROUGH (Input/output)	
P1	End Feed
P2	Bottom Feed

When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.

8 CONNECTOR/WIRE IN

BW	Bare Wire (Standard 36")
CON6	Connector 6"
CON24	Connector 24"
BW	Bare Wire (Standard 36")
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

CLS	Closed End (No feed)
BW	Bare Wire (Standard 36")
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10 WIRE COLOR

WH	White
BK	Black

11 WIRE TYPE

CL2	Class 2
CL2P	Plenum Rated

CL2P only available with bare wire leads (BW)

12 MOUNTING

CC	Concealed Clip
MG	Magnet
TBC-03	9/16" Flat TB-Grid
TBC-04	15/16" Flat or Tegular TB-Grid
TBC-05	9/16" Tegular TB-Grid

MG only available with RGBW 6.0

13 FINISH

ST	Satin
BK	Black
BZ	Bronze
WH	White
CU	Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

15 EXACT/OPTIMAL

O	Optimal Illumination
E	Exact Specified Length

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTL.lighting


Specification subject to change. Rev-11-11-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


VERS-LOUVER (07) RGBW

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with lens




Profile with concealed clip



Profile with TBC-03



Profile with TBC-04



Profile with TBC-05

2 DELIVERED LUMENS

[Calculated L70 = 51000 hrs]
Tested with VERS-07-RGBW-**-**-DRY

	6.0 W/FT											
	3000K			Red			Green			Blue		
	LM/FT	CRI	UGR	LM/FT	Wavelength	UGR	LM/FT	Wavelength	UGR	LM/FT	Wavelength	UGR
CL	82	93	≤ 14.6	22	631	≤ 9.8	61	515	≤ 13.6	20	464	≤ 9.8
DF	61	93	≤ 13.7	20	632	≤ 10.1	51	514	≤ 13	17	464	≤ 9.8

	4.0HE W/FT													
	3000K			Red			Green			Blue			ALL	
	LM/FT	CRI	UGR	LM/FT	Wavelength	UGR	LM/FT	Wavelength	UGR	LM/FT	Wavelength	UGR	LM/FT	UGR
CL	46	97	≤ 10.9	17	630	≤ 8.8	63	526	≤ 13	17	469	≤ 8.4	101	≤ 16.4
DF	35	98	≤ 11.2	14	628	≤ 8.4	52	524	≤ 12.5	14	469	≤ 8	83	≤ 15.8

5 DIODE VISIBILITY



DF - Diffused lens

CL - Clear lens

TEMPERATURE RATINGS

		6.0 W/FT		4.0 HE W/FT		8.0 HE W/FT	
		Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	125°F	-4°F	110°F
DMP	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	125°F	—	—

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-11-11-26

VERS-LOUVER (07) RGBW

24VDC Linear Fixtures - Surface & Recessed


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed | Bottom Feed

PASS THROUGH (Input/Output)




End Feed | Bottom Feed

CONFIGURATION OPTIONS




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed




Continuous Bottom Feed

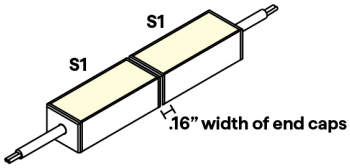

Continuous End to End Feed

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.




Bare Wire 36"
22 AWG



6" or 24" Overall
Wire Connector | 24 AWG
IP67 Rated, UL Listed

10 WIRE COLOR



White

Black


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

VERS-LOUVER (07) RGBW

24VDC Linear Fixtures - Surface & Recessed

12 MOUNTING

CC
(CC-01)



Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

MG




Magnet Clip

One MG provided per foot

To order separately use MG-02

MMA-02




Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02

Each clip comes with a #6 Flat Screw

Required when mounting to a non-magnetic surface

TBC-03



Plastic T-Bar Clip


Use on 9/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-03

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-04



Plastic T-Bar Clip


Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-04

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-05



Plastic T-Bar Clip

Use on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-05

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

13 FINISH



Satin

Black

Bronze


White

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

© 2026 QTL. All rights reserved


15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.


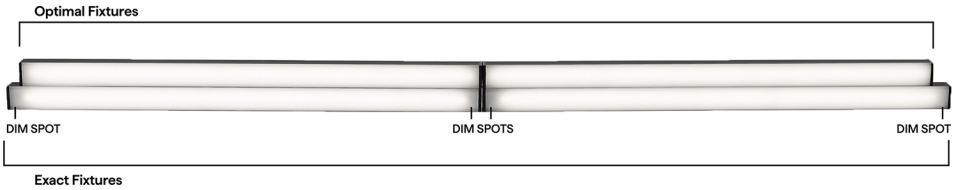


RGBW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 		P1 & P2 	
12"	10.59"		10.94"	
13"	12.59"		12.94"	
14"	12.59"		12.94"	
15"	14.59"		14.94"	
16"	14.59"		14.94"	
17"	16.59"		16.94"	
18"	16.59"		16.94"	
19"	18.59"		18.94"	
20"	18.59"		18.94"	
21"	20.59"		20.94"	
22"	20.59"		20.94"	
23"	22.59"		22.94"	
24"	22.59"		22.94"	
36"	34.59"		34.94"	
48"	46.59"		46.94"	
60"	58.59"		58.94"	
72"	70.59"		70.94"	
84"	82.59"		82.94"	
96"	94.59"		94.94"	


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

VERS-LOUVER (07) RGBW





24VDC Linear Fixtures - Surface & Recessed

RGBW DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	 End Feed
12"	2"
13"	0.5"
14"	1"
15"	1.5"
16"	2"
17"	0.5"
18"	1"
19"	1.5"
20"	2"
21"	0.5"
22"	1"
23"	1.5"
24"	2"
36"	2"
48"	2"
60"	2"
72"	2"
84"	2"
96"	2"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	 End Feed	 Bottom Feed	 End Feed	 Bottom Feed
12"	8.59"		8.94"	
13"	12.59"		12.94"	
14"	12.59"		12.94"	
15"	12.59"		12.94"	
16"	12.59"		12.94"	
17"	16.59"		16.94"	
18"	16.59"		16.94"	
19"	16.59"		16.94"	
20"	16.59"		16.94"	
21"	20.59"		20.94"	
22"	20.59"		20.94"	
23"	20.59"		20.94"	
24"	20.59"		20.94"	
36"	32.59"		32.94"	
48"	44.59"		44.94"	
60"	56.59"		56.94"	
72"	68.59"		68.94"	
84"	80.59"		80.94"	
96"	92.59"		92.94"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	RGBW, RGBW-HE
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with RGBW App Dongle

DIMMING PROTOCOL	INDOOR
	RGBW, RGBW-HE
DMX	QTM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGBW App Dongle

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

VERS-LOUVER (07) RGBW

24VDC Linear Fixtures - Surface & Recessed


COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M



Adjustable mounting bracket - Medium

HINGE - HMB-L



Adjustable mounting bracket - Large

HINGE - HMB-XL



Adjustable mounting bracket - XLarge

Q-PIVOT



Small mounting accessory

Q-ANGLE



Adjustable mounting accessory

NJ-LARGE



J Mounting Bracket

NU-LARGE




U Mounting Bracket

SD-J-LARGE



J Mounting Bracket

BL-LARGE



Backwards L Mounting Bracket

NL-LARGE



L Mounting Bracket


SD-L-LARGE



L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP

Q-NFC

Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26