
# VERS-LOUVER (07) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed

WHITE OPTICS | c UL us LISTED | NEC 410.2 & 410.16 Closet Rated up to 4.0W/ft | RoHS COMPLIANT | EPD ENVIRONMENTAL PRODUCT DECLARATION | JA8 2016 | 1-BIN 1-STEP STANDARD AND HE | 5 YEAR WARRANTY | BAA BUY AMERICAN ACT COMPLIANT | BABA BUILD AMERICA, BUY AMERICA COMPLIANT | Red List Approved Declare.






- A VERSatile fixture with a black louver that is designed to mitigate diode imaging and glare
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options

**INFORMATION REQUIRED FOR LIGHTING SCHEDULE**

| 1 PRODUCT | 2 WATTS/ FT | 3 CCT | 4 RATED | 5 LENS | 6 EXTERNAL LOUVER |
|---|---|---|---|---|---|
| | | | | | N/A |

**ADDITIONAL INFORMATION REQUIRED TO ORDER**

| 7 WIRE INPUT/ OUTPUT | 8 CONNECTOR/ WIRE IN | 9 CONNECTOR/ WIRE OUT | 10 WIRE COLOR | 11 WIRE TYPE | 12 MOUNTING | 13 FINISH | 14 LENGTH (IN) | 15 EXACT/ OPTIMAL |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | |

Sample Part Number: **VERS-07-SW-5.0-30-DRY-DF-P1-BW-BW-BK-CL2-CC-BK-48"-E**

### 1 PRODUCT

**VERS-07-SW**
**VERS-07-SW-USA**

Select USA option for BAA and BABA projects. Only DRY ratings apply.

See following pages for compatible power supplies.

### 2 WATTS/FT

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |
| **1.5HE** | 1.5W/ft HE |
| **3.0HE** | 3.0W/ft HE |
| **6.0HE** | 6.0W/ft HE |

### 3 CCT

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

### 4 RATED

| | |
|---|---|
| **DRY** | IP20 |
| **DMP** | IP54 |

### 5 LENS

| | |
|---|---|
| **DF** | Diffused |
| **CL** | Clear |

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.

### 6 EXTERNAL LOUVER

| | |
|---|---|
| **N/A** | Internal Louver included |

### 7 WIRE INPUT/OUTPUT

**SINGLE (Input only)**

| | |
|---|---|
| **S1** | End Feed |
| **S2** | Bottom Feed |

**PASS THROUGH (Input/output)**

| | |
|---|---|
| **P1** | End Feed |
| **P2** | Bottom Feed |

When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.

### 8 CONNECTOR/WIRE IN

| | |
|---|---|
| **BW** | Bare Wire (Standard 36") |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

### 9 CONNECTOR/WIRE OUT

| | |
|---|---|
| **CLS** | Closed End (No feed) |
| **BW** | Bare Wire (Standard 36") |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

### 10 WIRE COLOR

| | |
|---|---|
| **WH** | White |
| **BK** | Black |

### 11 WIRE TYPE

| | |
|---|---|
| **CL2** | Class 2 |
| **CL2P** | Plenum Rated |

CL2P only available with bare wire leads (BW)

### 12 MOUNTING

| | |
|---|---|
| **CC** | Concealed Clip |
| **MG** | Magnet |
| **TBC-03** | 9/16" Flat TB-Grid |
| **TBC-04** | 15/16" Flat or Tegular TB-Grid |
| **TBC-05** | 9/16" Tegular TB-Grid |

### 13 FINISH

| | |
|---|---|
| **ST** | Satin |
| **BK** | Black |
| **BZ** | Bronze |
| **WH** | White |
| **CU** | Custom |

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

### 14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

### 15 EXACT/OPTIMAL

| | |
|---|---|
| **O** | Optimal Illumination |
| **E** | Exact Specified Length |

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-11-11-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Suitable for installation in the storage area of a clothes closet when using wattage of 4.0W/ft or less


# VERS-LOUVER (07) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


## 1 PRODUCT - DIMENSIONS





Profile with lens





Profile with concealed clip





Profile with magnetic clip





Profile with magnet mount clip & magnetic mount accessory




Profile with TBC-03




Profile with TBC-04





Profile with TBC-05

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]
Tested with VERS-07-SW-**-30-DRY

| | 1.5 W/FT | | | 1.5HE W/FT | | | 3.0 W/FT | | | 3.0HE W/FT | | | 4.0 W/FT | | | 5.0 W/FT | | | 6.0HE W/FT | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | LM/FT | CRI | UGR | LM/FT | CRI | UGR | LM/FT | CRI | UGR | LM/FT | CRI | UGR | LM/FT | CRI | UGR | LM/FT | CRI | UGR | LM/FT | CRI | UGR |
| CL | 79 | 97 | ≤ 13.3 | 109 | 98 | ≤ 14.7 | 136 | 98 | ≤ 15.5 | 198 | 97 | ≤ 16.9 | 169 | 98 | ≤ 16.1 | 205 | 98 | ≤ 16.7 | 382 | 98 | ≤ 19.3 |
| DF | 69 | 97 | ≤ 13.8 | 86 | 98 | ≤ 14.8 | 118 | 98 | ≤ 15.7 | 164 | 98 | ≤ 17.2 | 145 | 98 | ≤ 16.6 | 175 | 98 | ≤ 17.3 | 300 | 98 | ≤ 19.3 |

## 5 DIODE VISIBILITY

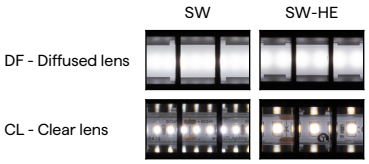


## TEMPERATURE RATINGS

| | | 1.5 W/FT | | 1.5 HE W/FT | | 3.0 W/FT | | 3.0 HE W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0 HE W/FT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 130°F | -4°F | 135°F | -4°F | 125°F | -4°F | 120°F | -4°F | 120°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 130°F | -4°F | 135°F | -4°F | 125°F | -4°F | 120°F | -4°F | 120°F |


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# VERS-LOUVER (07) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)





End Feed | Bottom Feed

PASS THROUGH (Input/Output)





End Feed | Bottom Feed

## CONFIGURATION OPTIONS





Single End Feed





Connection by others

Non-Continuous End Feed





Connection by others

Non-Continuous Corner Feed





Continuous Bottom Feed

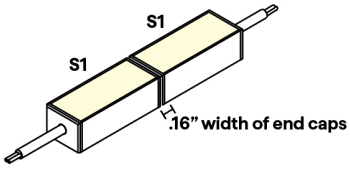



Continuous End to End Feed

## 8/9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.





Bare Wire 36"
22 AWG




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

## 10 WIRE COLOR



White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-11-11-26

# VERS-LOUVER (07) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## 12 MOUNTING

**CC**
(CC-01)




Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

**MG**





Magnet Clip

One MG provided per foot

To order separately use MG-02

**MMA-02**





Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02

Each clip comes with a #6 Flat Screw

Required when mounting to a non-magnetic surface

**TBC-03**




Plastic T-Bar Clip


Use on 9/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-03

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

**TBC-04**




Plastic T-Bar Clip


Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-04

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

**TBC-05**




Plastic T-Bar Clip

Use on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-05

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

## 13 FINISH



Satin

Black

Bronze


White

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

© 2026 QTL. All rights reserved 


## 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.


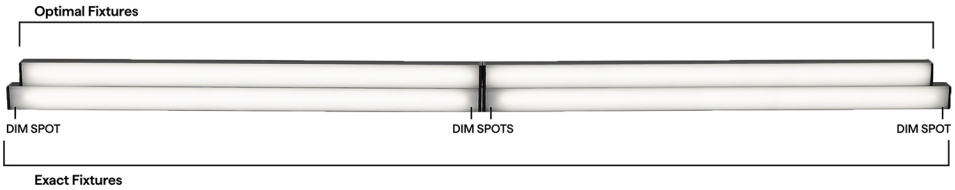



## SW DRY DMP LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture   |
|---|---|
| 12" | 0.5" |
| 13" | 0.5" |
| 14" | 0.5" |
| 15" | 0.5" |
| 16" | 0.5" |
| 17" | 0.5" |
| 18" | 0.5" |
| 19" | 0.5" |
| 20" | 0.5" |
| 21" | 0.5" |
| 22" | 0.5" |
| 23" | 0.5" |
| 24" | 0.5" |
| 36" | 0.5" |
| 48" | 0.5" |
| 60" | 0.5" |
| 72" | 0.5" |
| 84" | 0.5" |
| 96" | 0.5" |

### OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2   | P1 & P2   |
|---|---|---|
| 12" | 11.49" | 11.74" |
| 13" | 12.49" | 12.74" |
| 14" | 13.49" | 13.74" |
| 15" | 14.49" | 14.74" |
| 16" | 15.49" | 15.74" |
| 17" | 16.49" | 16.74" |
| 18" | 17.49" | 17.74" |
| 19" | 18.49" | 18.74" |
| 20" | 19.49" | 19.74" |
| 21" | 20.49" | 20.74" |
| 22" | 21.49" | 21.74" |
| 23" | 22.49" | 22.74" |
| 24" | 23.49" | 23.74" |
| 36" | 35.49" | 35.74" |
| 48" | 47.49" | 47.74" |
| 60" | 59.49" | 59.74" |
| 72" | 71.49" | 71.74" |
| 84" | 83.49" | 83.74" |
| 96" | 95.49" | 95.74" |


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# VERS-LOUVER (07) STATIC WHITE





24VDC Linear Fixtures - Surface & Recessed

## SW-HE DRY LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture |
|---|---|
| |   End Feed |
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

### OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2 | | P1 & P2 | |
|---|---|---|---|---|
| |   End Feed |   Bottom Feed |   End Feed |   Bottom Feed |
| 12" | 10.49" | | 10.74" | |
| 13" | 12.49" | | 12.74" | |
| 14" | 12.49" | | 12.74" | |
| 15" | 14.49" | | 14.74" | |
| 16" | 14.49" | | 14.74" | |
| 17" | 16.49" | | 16.74" | |
| 18" | 16.49" | | 16.74" | |
| 19" | 18.49" | | 18.74" | |
| 20" | 18.49" | | 18.74" | |
| 21" | 20.49" | | 20.74" | |
| 22" | 20.49" | | 20.74" | |
| 23" | 22.49" | | 22.74" | |
| 24" | 22.49" | | 22.74" | |
| 36" | 34.49" | | 34.74" | |
| 48" | 46.49" | | 46.74" | |
| 60" | 58.49" | | 58.74" | |
| 72" | 70.49" | | 70.74" | |
| 84" | 82.49" | | 82.74" | |
| 96" | 94.49" | | 94.74" | |

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | |
|---|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Dim to Black | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 |
| 0.1% | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP |
| 1% | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


# VERS-LOUVER (07) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

| DIMMING PROTOCOL | INDOOR | |
|---|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Non-Dim | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND |
| Phase | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 |
| 0-10V | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP |
| Lutron Athena | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN |
| ECO System | QTM-eLED(E) | QTM-eLED(E) |
| DMX | QZ-DMX | QZ-DMX |
| DALI-2: DT6 | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 |
| SCENE App Dimmed | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle |


## COMPATIBLE MOUNTING ACCESSORIES

**HINGE - HMB-M**




Adjustable mounting bracket - Medium

**HINGE - HMB-L**




Adjustable mounting bracket - Large

**HINGE - HMB-XL**




Adjustable mounting bracket - XLarge

**Q-PIVOT**




Small mounting accessory

**Q-ANGLE**




Adjustable mounting accessory

**NJ-LARGE**



J Mounting Bracket

**NU-LARGE**




U Mounting Bracket

**SD-J-LARGE**



J Mounting Bracket

**BL-LARGE**



Backwards L Mounting Bracket

**NL-LARGE**




L Mounting Bracket

**SD-L-LARGE**



L Mounting Bracket

**MMA-02**




Magnet Mount Accessory for MG-02

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-11-11-26

# VERS-LOUVER (07) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


## COMPATIBLE WIRING ACCESSORIES

**Q-mini-J**




UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

**Q-mini-J5**




UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

**CON120-EXT**



10ft Con cable extender
DRY/DMP/WET

**CON FOUR-FER**



Splits lead from one to four LED Con connectors
DRY/DMP/WET

**CON M - BARREL F**



Male con to barrel cable adaptor
DRY/DMP

## COMPATIBLE CONTROL ACCESSORIES

**SCENE APP DONGLE**




Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS

**NFC APP**




Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting