



VERS-CLEAR (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

white
optics

UL
LISTED

RoHS
COMPLIANT

EPD
ENVIRONMENTAL
PRODUCT DECLARATION

5 YEAR
WARRANTY

U.S.
BABA

DW-HE
ONLY

Declare.



- The fixture's flat lens sits flush, showcasing the versatile fixture's exceptional light performance in any indoor environment.
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	LENS	EXTERNAL LOUVER
				CL	

7	8	9	10	11	12	13	14	15
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: VERS-03-WD-6.0-19/30-DRY-CL-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E

1	2	3	4	5	6
PRODUCT	WATTS/FT	CCT	RATED	LENS	EXTERNAL LOUVER
VERS-03-WD	6.0 6.0W/ft	19/27 1900K/2700K 19/30 1900K/3000K	DRY IP20 WET IP67	CL Clear	L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver
LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies.			Can be suitable for exterior use, contact factory for more information		Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.
VERS-03-DW VERS-03-DW-USA	1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE	20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K	DRY IP20		
Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.					
LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies	1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	24/30 2400K/3000K 27/40 2700K/4000K	DMP IP54		
	1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K	WET IP67		
			Can be suitable for exterior use, contact factory for more information		
7	8	9	10		
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR		
SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed	BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"	CLS Closed End (No feed)	WH White BK Black		
When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)				
PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed P3 Left Side Feed P4 Right Side Feed	BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"	BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"	CLS Closed End (No feed)		
When using TBC Mounting, a bare wire P2 wire feed is recommended. See install instructions for details.	BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
11	12	13	14	15	
WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL	
CL2 Class 2 CL2P Plenum Rated	CC Concealed Clip MG Magnet TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver	ST Satin BK Black BZ Bronze WH White CU Custom	Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	O Optimal Illumination E Exact Specified Length	
CL2P only available with bare wire leads (BW)		White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory.			


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



VERS-CLEAR (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

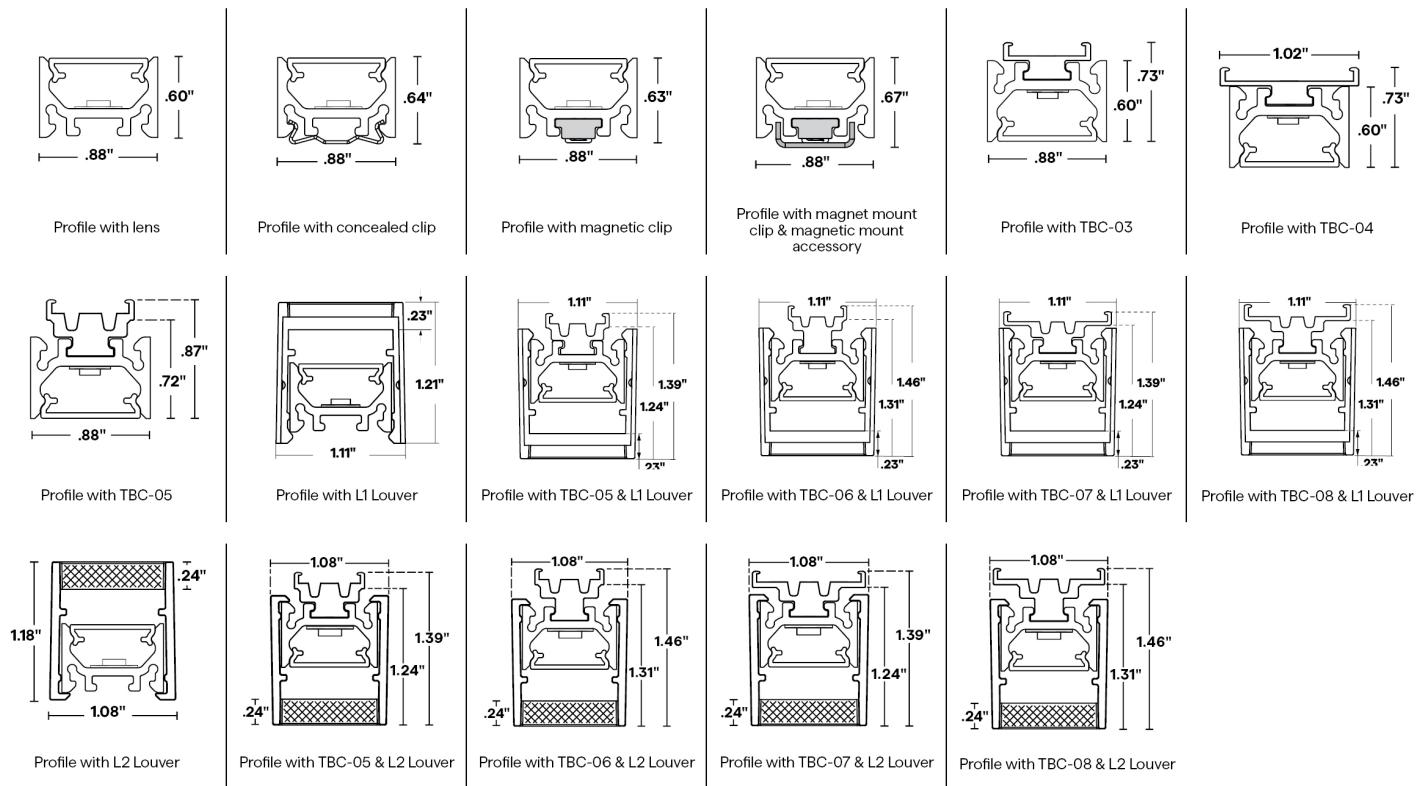

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with VERS-03-WD-**-30-DRY

	6.0 W/FT	
	LM/FT	CRI
CL	488	97

[Calculated L70 = 70000 hrs]
Tested with VERS-03-DW-**-30-DRY

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	163	97	254	98	389	98


5 DIODE VISIBILITY



CL - Clear lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

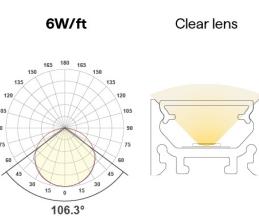



VERS-CLEAR (03) FOR WARM DIM APPLICATIONS




24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS

		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT	
		WD 6.0 W/FT		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	145°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	110°F
DMP	Ambient Operating Temp - Surface	—	—	-4°F	140°F	-4°F	130°F	-4°F	115°F	—	—	—	—
WET	Ambient Operating Temp - Surface	-4°F	110°F	-4°F	140°F	-4°F	130°F	-4°F	115°F	—	—	—	—




6 EXTERNAL LOUVER

PLASTIC

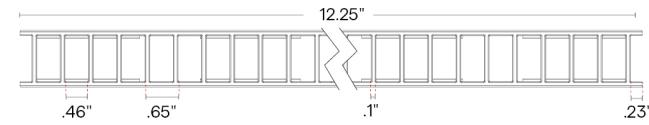

Lumen Multiplier
WH BK
0.70 0.54





METAL

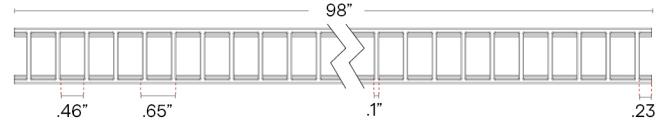





Lumen Multiplier
WH BK ST
0.64 0.39 0.59

7 WIRE INPUT/OUTPUT

SINGLE (Input only)



PASS THROUGH (Input/Output)






VERS-CLEAR (03) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS

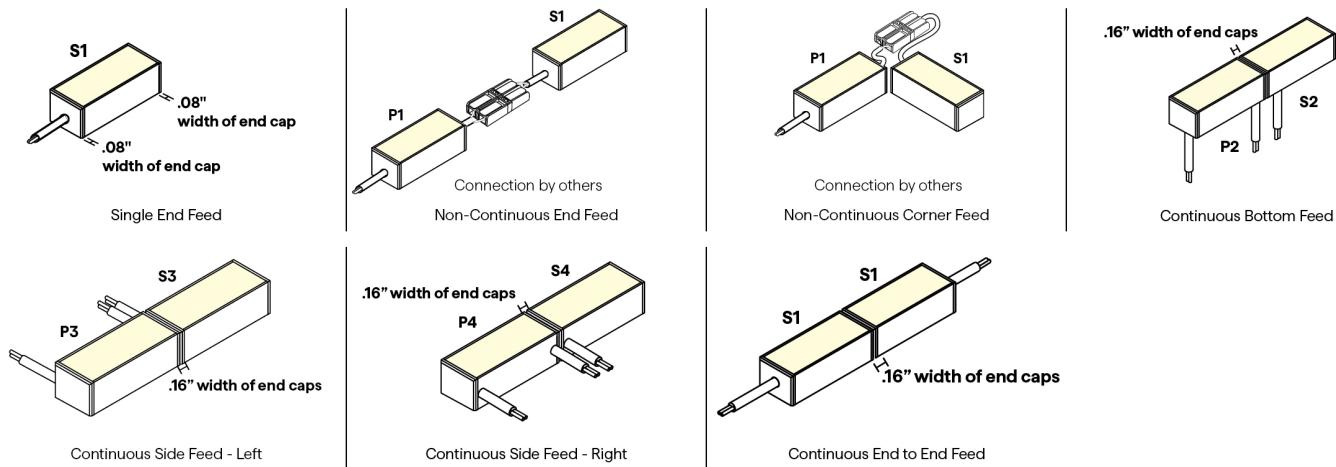

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.

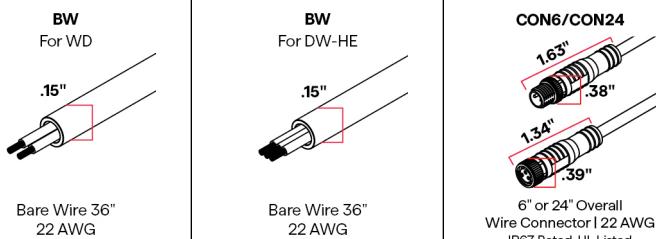

10 WIRE COLOR



12 MOUNTING

CC (CC-01)	CC (CC-02)	MG	MMA-02	TBC-03
 Concealed Clip Required if L1 or L2 Louver is selected 2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4' To order separately use CC-01 Each clips comes with a #4 x 5/8" Flat Head screw.	 Louver Concealed Clip Required if L1 or L2 Louver is selected 2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4' To order separately use CC-02 Each clips comes with a #4 x 5/8" Flat Head screw.	 Magnet Clip One MG provided per foot To order separately use MG-02	 Magnet Mount Accessory for MG-02 Sold separately, to order use MMA-02 Each clip comes with a #6 Flat Screw Required when mounting to a non-magnetic surface	 Plastic T-Bar Clip Use on 9/16" Flat Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-03 Each pair of clips comes with M2.5 x 4mm set screw and Allen key




VERS-CLEAR (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

MOUNTING CONTINUED

TBC-04	TBC-05	TBC-06	TBC-07	TBC-08
Plastic T-Bar Clip				
Use on 15/16" Flat or Tegular Drop Ceiling	Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling	Use with Louver on 9/16" Tegular Drop Ceiling	Use with Louver on 15/16" Flat Drop Ceiling	Use with Louver on 15/16" Tegular Drop Ceiling
2 clips provided for first 12"; 1 clip provided for each additional 12" or less length	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length
To order separately use TBC-04	To order separately use TBC-05	To order separately use TBC-06	To order separately use TBC-07	To order separately use TBC-08
Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key

13 FINISH




Satin
Black
Bronze
White

Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

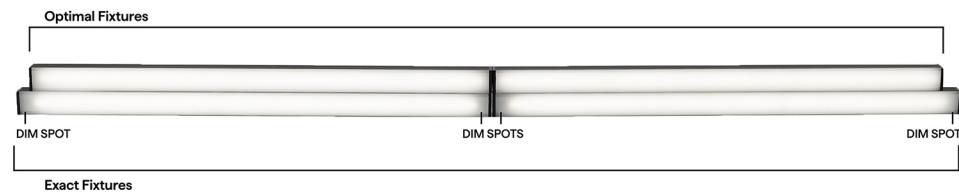



VERS-CLEAR (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

WD DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.49"	10.74"	10.34"	10.44"
13"	12.49"	12.74"	12.34"	12.44"
14"	12.49"	12.74"	12.34"	12.44"
15"	14.49"	14.74"	14.34"	14.44"
16"	14.49"	14.74"	14.34"	14.44"
17"	16.49"	16.74"	16.34"	16.44"
18"	16.49"	16.74"	16.34"	16.44"
19"	18.49"	18.74"	18.34"	18.44"
20"	18.49"	18.74"	18.34"	18.44"
21"	20.49"	20.74"	20.34"	20.44"
22"	20.49"	20.74"	20.34"	20.44"
23"	22.49"	22.74"	22.34"	22.44"
24"	22.49"	22.74"	22.34"	22.44"
36"	34.49"	34.74"	34.34"	34.44"
48"	46.49"	46.74"	46.34"	46.44"
60"	58.49"	58.74"	58.34"	58.44"
72"	70.49"	70.74"	70.34"	70.44"
84"	82.49"	82.74"	82.34"	82.44"
96"	94.49"	94.74"	94.34"	94.44"

WD WET LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.69"	10.84"	10.59"	10.69"
13"	12.69"	12.84"	12.59"	12.69"
14"	12.69"	12.84"	12.59"	12.69"
15"	14.69"	14.84"	14.59"	14.69"
16"	14.69	14.84"	14.59"	14.69"
17"	16.69"	16.84"	16.59"	16.69"
18"	16.69"	16.84"	16.59"	16.69"
19"	18.69"	18.84"	18.59"	18.69"
20"	18.69"	18.84"	18.59"	18.69"
21"	20.69"	20.84"	20.59"	20.69"
22"	20.69"	20.84"	20.59"	20.69"
23"	22.69"	22.84"	22.59"	22.69"
24"	22.69"	22.84"	22.59"	22.69"
36"	34.69"	34.84"	34.59"	34.69"
48"	46.69"	46.84"	46.59"	46.69"
60"	58.69"	58.84"	58.59"	58.69"
72"	70.69"	70.84"	70.59"	70.69"
84"	82.69"	82.84"	82.59"	82.69"
96"	94.69"	94.84"	94.59"	94.69"



VERS-CLEAR (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.59"	10.94"	10.49"	10.59"
13"	12.59"	12.94"	12.49"	12.59"
14"	12.59"	12.94"	12.49"	12.59"
15"	14.59"	14.94"	14.49"	14.59"
16"	14.59"	14.94"	14.49"	14.59"
17"	16.59"	16.94"	16.49"	16.59"
18"	16.59"	16.94"	16.49"	16.59"
19"	18.59"	18.94"	18.49"	18.59"
20"	18.59"	18.94"	18.49"	18.59"
21"	20.59"	20.94"	20.49"	20.59"
22"	20.59"	20.94"	20.49"	20.59"
23"	22.59"	22.94"	22.49"	22.59"
24"	22.59"	22.94"	22.49"	22.59"
36"	34.59"	34.94"	34.49"	34.59"
48"	46.59"	46.94"	46.49"	46.59"
60"	58.59"	58.94"	58.49"	58.59"
72"	70.59"	70.94"	70.49"	70.59"
84"	82.59"	82.94"	82.49"	82.59"
96"	94.59"	94.94"	94.49"	94.59"

DW-HE WET LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.74"	11.14"	10.64"	10.84"
13"	12.74"	11.14"	12.64"	12.84"
14"	12.74"	13.14"	12.64"	12.84"
15"	14.74"	13.14"	14.64"	14.84"
16"	14.74"	15.14"	14.64"	14.84"
17"	16.74"	15.14"	16.64"	16.84"
18"	16.74"	17.14"	16.64"	16.84"
19"	18.74"	17.14"	18.64"	18.84"
20"	18.74"	19.14"	18.64"	18.84"
21"	20.74"	19.14"	20.64"	20.84"
22"	20.74"	21.14"	20.64"	20.84"
23"	22.74"	21.14"	22.64"	22.84"
24"	22.74"	23.14"	22.64"	22.84"
36"	34.74"	35.14"	34.64"	34.84"
48"	46.74"	47.14"	46.64"	46.84"
60"	58.74"	59.14"	58.64"	58.84"
72"	70.74"	71.14"	70.64"	70.84"
84"	82.74"	83.14"	82.64"	82.84"
96"	94.74"	95.14"	94.64"	94.84"



VERS-CLEAR (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QZ-DW	Q-SET-QZ-PH/0-10V QZ-PH/0-10V
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN		
ECO System		QTM-eLED(E)		
DMX	If using DW LED, wattage must be doubled	QZ-DMX		QZ-DMX
DALI-2: DT6	If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
DALI-2: DT8	If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		



VERS-CLEAR (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M 1.41" 1.71"	HINGE - HMB-L 1.46" 1.29" 1.46"	HINGE - HMB-XL 4" 1.46"	Q-PIVOT 75" 1.03"	Q-ANGLE 1.38" 2.23"	NJ-LARGE 	NU-LARGE 	SD-J-LARGE 	BL-LARGE Backwards L Mounting Bracket	NL-LARGE L Mounting Bracket
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	J Mounting Bracket	U Mounting Bracket	J Mounting Bracket		
SD-L-LARGE L Mounting Bracket	MMA-02 Magnet Mount Accessory for MG-02 1.86" .64" 12" .58"								

COMPATIBLE WIRING ACCESSORIES

Q-mini-J 2" 1.25"	Q-mini-J5 2.80" 2.27"
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE 1.36" 2.58"
Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP Q-NFC
Read and write DMX addresses and adjust voltage