



# VERS-CLEAR (03) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed



STANDARD AND HE

410.2 & 410.16  
Closet Rated  
up to 4.0W/ftBUY AMERICAN  
ACT COMPLIANT

- The fixture's flat lens sits flush, showcasing the versatile fixture's exceptional light performance in any indoor environment.
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
				CL										

Sample Part Number: VERS-03-SW-5.0-30-DRY-CL-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E


<b>1</b> <b>PRODUCT</b>  <b>VERS-03-SW</b> <b>VERS-03-SW-USA</b>  Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.  See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE  1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE  1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft	<b>3</b> <b>CCT</b>  20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K  24 2400K 27 2700K 30 3000K 35 3500K 40 4000K  20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	<b>4</b> <b>RATED</b>  DRY IP20  DMP IP54  WET IP67  Can be suitable for exterior use, contact factory for more information	<b>5</b> <b>LENS</b>  CL Clear  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.	<b>6</b> <b>EXTERNAL LOUVER</b>  L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver  Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed  P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"  BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)  BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black		
When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  CC Concealed Clip MG Magnet TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver	<b>13</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze WH White CU Custom  White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



# VERS-CLEAR (03) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed

### 1 PRODUCT - DIMENSIONS

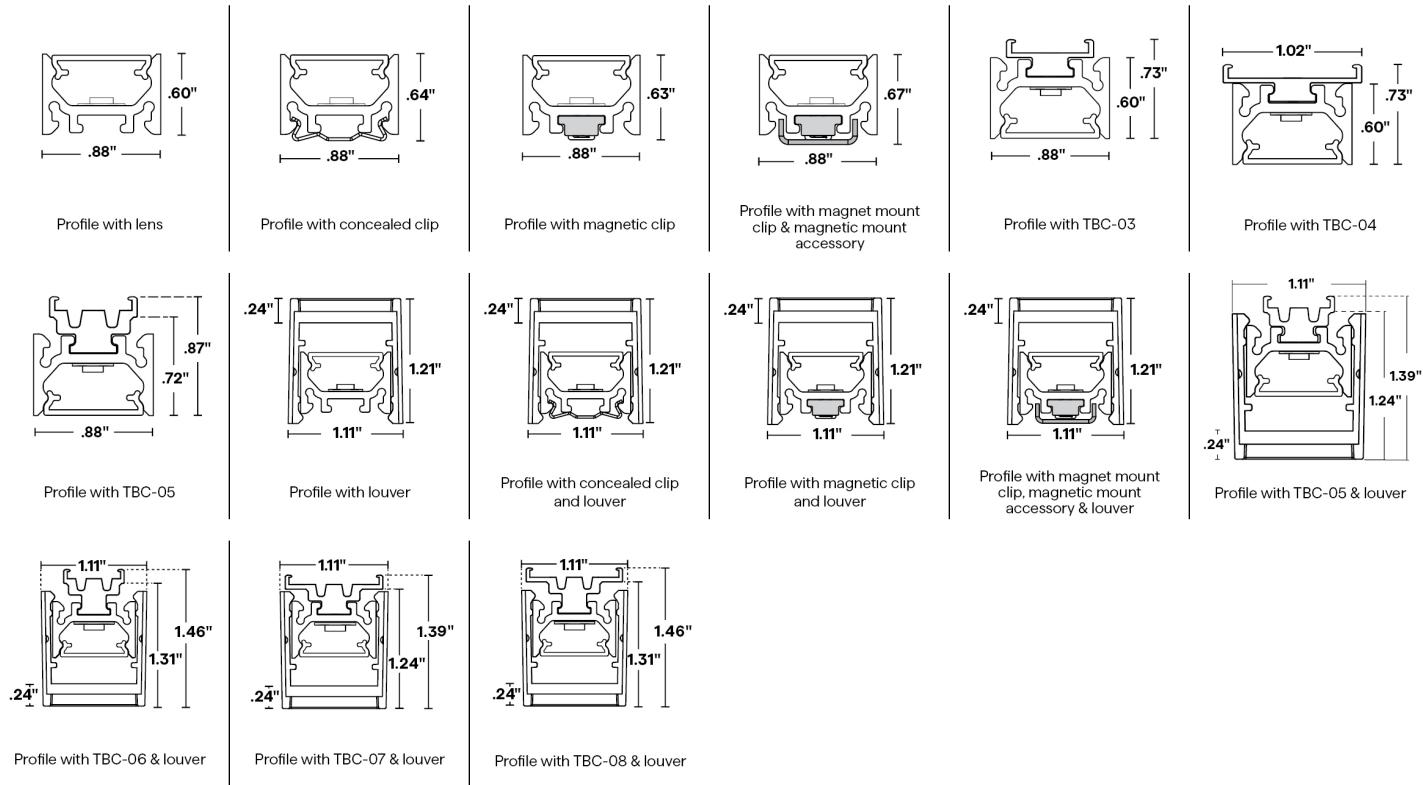

### 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]  
Tested with VERS-03-SW-\*\*-30-DRY

	1.5 W/FT	1.5HE W/FT	3.0 W/FT	3.0HE W/FT	4.0 W/FT	5.0 W/FT	6.0HE W/FT	9.0HE W/FT						
LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	
CL	158	98	200	98	276	98	381	98	356	98	427	98	692	98

### 5 DIODE VISIBILITY






# VERS-CLEAR (03) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed

### PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.


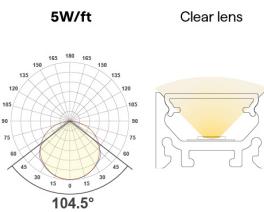


### TEMPERATURE RATINGS

		1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT		9.0 HE W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	120°F	-4°F	120°F	-4°F	100°F
DMP	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	140°F	-4°F	125°F	-4°F	130°F	-4°F	120°F	-4°F	115°F	-4°F	115°F	-13°F	95°F
WET	Ambient Operating Temp - Surface	-4°F	135°F	—	—	-4°F	125°F	—	—	-4°F	120°F	-4°F	115°F	—	—	—	—


### 6 EXTERNAL LOUVER

#### PLASTIC

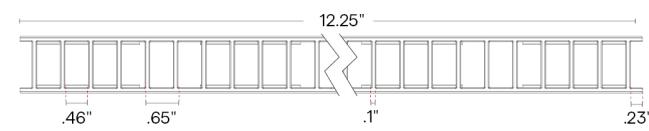



Lumen Multiplier  
WH      BK

0.70      0.54




Profile with plastic louver

#### METAL

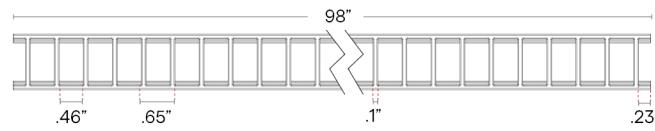

Lumen Multiplier  
WH      BK      ST

0.64      0.39      0.59



Profile with metal louver




# VERS-CLEAR (03) STATIC WHITE


## 24VDC Linear Fixtures - Surface & Recessed

### 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

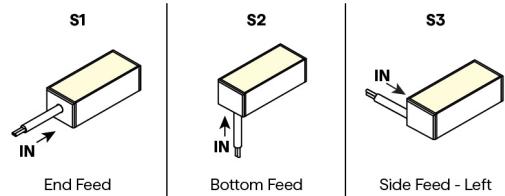


PASS THROUGH (Input/Output)

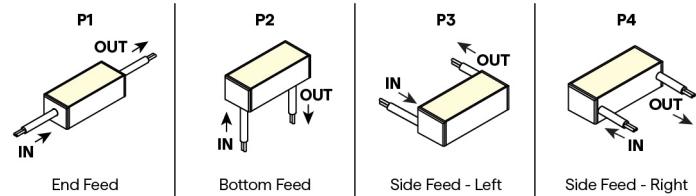


### CONFIGURATION OPTIONS

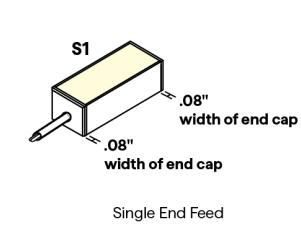


Single End Feed

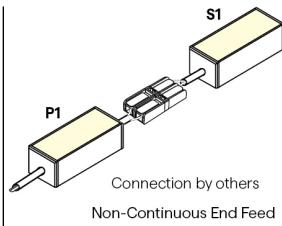


Non-Continuous End Feed




Non-Continuous Corner Feed




Continuous Bottom Feed

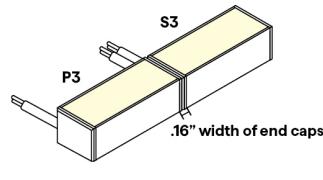

Continuous Side Feed - Left

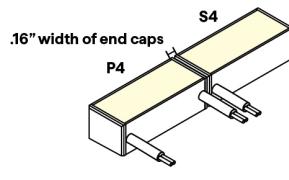


Continuous Side Feed - Right

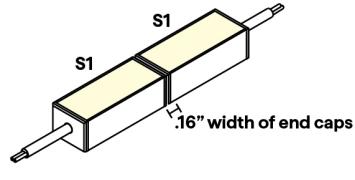

Continuous End to End Feed

### 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.



Bare Wire 36"  
22 AWG



6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

### 10 WIRE COLOR



White

Black



# VERS-CLEAR (03) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed

### 12 MOUNTING

CC (CC-01)	CC (CC-02)	MG	MMA-02	TBC-03
Concealed Clip	Louver Concealed Clip Required if L1 or L2 Louver is selected	Magnet Clip	Magnet Mount Accessory for MG-02	Plastic T-Bar Clip
2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'	2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'	One MG provided per foot To order separately use MG-02	Sold separately, to order use MMA-02 Each clip comes with a #6 Flat Screw Required when mounting to a non-magnetic surface	Use on 9/16" Flat Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture. To order separately use TBC-03 Each pair of clips comes with M2.5 x 4mm set screw and Allen key
To order separately use CC-01 (sold in pairs)	To order separately use CC-02 (sold in pairs)			
Each clip comes with a #4 x 5/8" Flat Head screw.	Each clip comes with a #4 x 5/8" Flat Head screw.			

### MOUNTING CONTINUED

TBC-04	TBC-05	TBC-06	TBC-07	TBC-08
Plastic T-Bar Clip				
Use on 15/16" Flat or Tegular Drop Ceiling	Use on 9/16" Tegular Drop Ceiling	Use with Louver on 9/16" Tegular Drop Ceiling	Use with Louver on 15/16" Flat Drop Ceiling	Use with Louver on 15/16" Tegular Drop Ceiling
2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.
To order separately use TBC-04	To order separately use TBC-05	To order separately use TBC-06	To order separately use TBC-07	To order separately use TBC-08
Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key

### 13 FINISH



Satin

Black

Bronze

White

Custom finishes require a longer lead time, consult factory




# VERS-CLEAR (03) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed

### 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

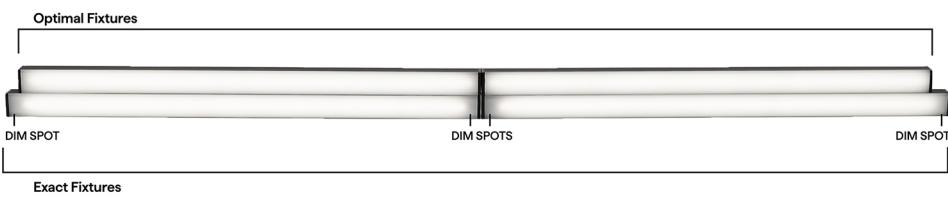

### SW DRY DMP LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	0.5"	
13"	0.5"	
14"	0.5"	
15"	0.5"	
16"	0.5"	
17"	0.5"	
18"	0.5"	
19"	0.5"	
20"	0.5"	
21"	0.5"	
22"	0.5"	
23"	0.5"	
24"	0.5"	
36"	0.5"	
48"	0.5"	
60"	0.5"	
72"	0.5"	
84"	0.5"	
96"	0.5"	

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	11.49"	11.74"	11.74"	11.34"	11.44"	11.44"	11.44"	11.44"
13"	12.49"	12.74"	12.74"	12.34"	12.44"	12.44"	12.44"	12.44"
14"	13.49"	13.74"	13.74"	13.34"	13.44"	13.44"	13.44"	13.44"
15"	14.49"	14.74"	14.74"	14.34"	14.44"	14.44"	14.44"	14.44"
16"	15.49"	15.74"	15.74"	15.34"	15.44"	15.44"	15.44"	15.44"
17"	16.49"	16.74"	16.74"	16.34"	16.44"	16.44"	16.44"	16.44"
18"	17.49"	17.74"	17.74"	17.34"	17.44"	17.44"	17.44"	17.44"
19"	18.49"	18.74"	18.74"	18.34"	18.44"	18.44"	18.44"	18.44"
20"	19.49"	19.74"	19.74"	19.34"	19.44"	19.44"	19.44"	19.44"
21"	20.49"	20.74"	20.74"	20.34"	20.44"	20.44"	20.44"	20.44"
22"	21.49"	21.74"	21.74"	21.34"	21.44"	21.44"	21.44"	21.44"
23"	22.49"	22.74"	22.74"	22.34"	22.44"	22.44"	22.44"	22.44"
24"	23.49"	23.74"	23.74"	23.34"	23.44"	23.44"	23.44"	23.44"
36"	35.49"	35.74"	35.74"	35.34"	35.44"	35.44"	35.44"	35.44"
48"	47.49"	47.74"	47.74"	47.34"	47.44"	47.44"	47.44"	47.44"
60"	59.49"	59.74"	59.74"	59.34"	59.44"	59.44"	59.44"	59.44"
72"	71.49"	71.74"	71.74"	71.34"	71.44"	71.44"	71.44"	71.44"
84"	83.49"	83.74"	83.74"	83.34"	83.44"	83.44"	83.44"	83.44"
96"	95.49"	95.74"	95.74"	95.34"	95.44"	95.44"	95.44"	95.44"



# VERS-CLEAR (03) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed

### SW WET LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	11.64"		11.79"		11.54"		11.64"	
13"	12.64"		12.79"		12.54"		12.64"	
14"	13.64"		13.79"		13.54"		13.64"	
15"	14.64"		14.79"		14.54"		14.64"	
16"	15.64"		15.79"		15.54"		15.64"	
17"	16.64"		16.79"		16.54"		16.64"	
18"	17.64"		17.79"		17.54"		17.64"	
19"	18.64"		18.79"		18.54"		18.64"	
20"	19.64"		19.79"		19.54"		19.64"	
21"	20.64"		20.79"		20.54"		20.64"	
22"	21.64"		21.79"		21.54"		21.64"	
23"	22.64"		22.79"		22.54"		22.64"	
24"	23.64"		23.79"		23.54"		23.64"	
36"	35.64"		35.79"		35.54"		35.64"	
48"	47.64"		47.79"		47.54"		47.64"	
60"	59.64"		59.79"		59.54"		59.64"	
72"	71.64"		71.79"		71.54"		71.64"	
84"	83.64"		83.79"		83.54"		83.64"	
96"	95.64"		95.79"		95.54"		95.64"	

### SW-HE DRY DMP LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.49"		10.74"		10.34"		10.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	12.49"		12.74"		12.34"		12.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	14.49"		14.74"		14.34"		14.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	16.49"		16.74"		16.34"		16.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	18.49"		18.74"		18.34"		18.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	20.49"		20.74"		20.34"		20.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	22.49"		22.74"		22.34"		22.44"	
36"	34.49"		34.74"		34.34"		34.44"	
48"	46.49"		46.74"		46.34"		46.44"	
60"	58.49"		58.74"		58.34"		58.44"	
72"	70.49"		70.74"		70.34"		70.44"	
84"	82.49"		82.74"		82.34"		82.44"	
96"	94.49"		94.74"		94.34"		94.44"	



# VERS-CLEAR (03) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
<b>Dim to Black</b>	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	



# VERS-CLEAR (03) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b> 1.41" .71"	<b>HINGE - HMB-L</b> 1.46" 1.29" 1.46"	<b>HINGE - HMB-XL</b> 4" 1.46"	<b>Q-PIVOT</b> .75" 1.03"	<b>Q-ANGLE</b> 1.38" 2.23"	<b>NJ-LARGE</b> 	<b>NU-LARGE</b> 	<b>SD-J-LARGE</b> 	<b>BL-LARGE</b> 	<b>NL-LARGE</b> 
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	J Mounting Bracket	U Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket	L Mounting Bracket
<b>SD-L-LARGE</b> 	<b>MMA-02</b> 1.86" .64" 12" .58"	Magnet Mount Accessory for MG-02							



## VERS-CLEAR (03) STATIC WHITE

### 24VDC Linear Fixtures - Surface & Recessed

#### COMPATIBLE WIRING ACCESSORIES



#### COMPATIBLE APPS

##### NFC APP



Read and write DMX addresses and adjust voltage