





VERS-DROP (10) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



Declare.

Red List Approved



- Utilizes an extruded drop lens that sits proud of the fixture for maximum variations of LED sources
- The high-quality lens provides a three sided diffuse illumination
- Integrated metal endcaps combined with an extruded aluminum housing give this fixture a polished modern look
- Mounting options include concealed clip, magnet clips or T-Bar clips
- White Optics, an internal coating that results in greater lumen output, comes standard in all VERS fixtures
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	LENS	EXTERNAL LOUVER
					N/A

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **VERS-10-WD-6.0-19/30-DRY-DF-N/A-P1-BW-BW-BK-CL2-CC-BK-48"-E**

1 PRODUCT VERS-10-WD LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies. VERS-10-DW LED engine is built with 3 wires requiring 0-10V, DMX or DALI control.Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	2 WATTS/FT 6.06.0W/ft 1.5HE1.5W/ft HE 2.5HE2.5W/ft HE 4.0HE4.0W/ft HE 1.5HE1.5W/ft HE 2.5HE2.5W/ft HE 1.5HE1.5W/ft HE 2.5HE2.5W/ft HE	3 CCT 19/271900K/2700K 19/301900K/3000K 20/272000K/2700K 20/302000K/3000K 27/402700K/4000K 27/552700K/5500K 24/302400K/3000K 27/402700K/4000K 20/272000K/2700K 20/302000K/3000K 27/402700K/4000K 27/552700K/5500K	4 RATED DRYIP20 WETIP67 Can be suitable for exterior use, contact factory for more information DRYIP20 DMPIP54 WETIP67 Can be suitable for exterior use, contact factory for more information	5 LENS DFDiffused PRPolar For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. See VERS-04 for additional 25° lens option.	6 EXTERNAL LOUVER N/ANo Louver
7 WIRE INPUT/OUTPUT SINGLE (Input only) S1End Feed S2Bottom Feed S3Left Side Feed S4Right Side Feed When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details. PASS THROUGH (Input/output) P1End Feed P2Bottom Feed P3Left Side Feed P4Right Side Feed When using TBC Mounting, a bare wire P2 wire feed is recommended. See install instructions for details.	8 CONNECTOR/WIRE IN BWBare Wire (Standard 36") CON6Connector 6" CON24Connector 24" BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48) BWBare Wire (Standard 36") CON6Connector 6" CON24Connector 24" BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	9 CONNECTOR/WIRE OUT CLSClosed End (No feed) BWBare Wire (Standard 36") CON6Connector 6" CON24Connector 24" BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	10 WIRE COLOR WHWhite BKBlack		
11 WIRE TYPE CL2Class 2 CL2PPlenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING CCConcealed Clip MGMagnet TBC-039/16" Flat TB-Grid TBC-0415/16" Flat or Tegular TB-Grid TBC-059/16" Tegular TB-Grid	13 FINISH STSatin BKBlack BZBronze WHWhite CUCustom	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL OE Optimal Illumination Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




VERS-DROP (10) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with lens




Profile with concealed clip




Profile with magnetic clip




Profile with magnet mount clip & magnetic mount accessory



Profile with TBC-03



Profile with TBC-04



Profile with TBC-05

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with VERS-10-WD-**-**-DRY

	6.0 W/FT	
	3000K	
	LM/FT	CRI
PR	322	97
DF	304	97

[Calculated L70 = 70000 hrs]
Tested with VERS-10-DW-**-**-DRY

	2.5HE W/FT	
	3000K	
	LM/FT	CRI
PR	205	98
DF	193	98

5 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





VERS-DROP (10) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


		DW 2.5 HE W/FT			
		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F
DMP	Ambient Operating Temp - Surface	-4°F	130°F	-4°F	115°F
WET	Ambient Operating Temp - Surface	-4°F	130°F	-4°F	115°F

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

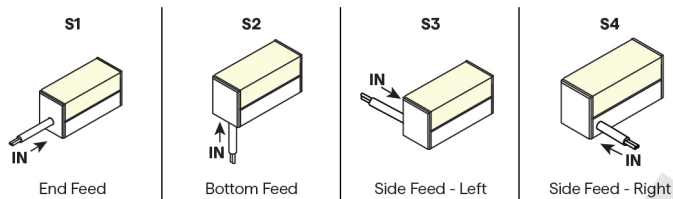

PASS THROUGH (Input/Output)

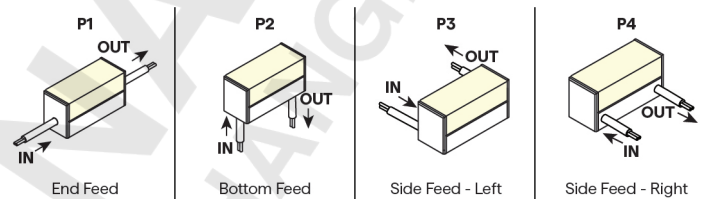

CONFIGURATION OPTIONS

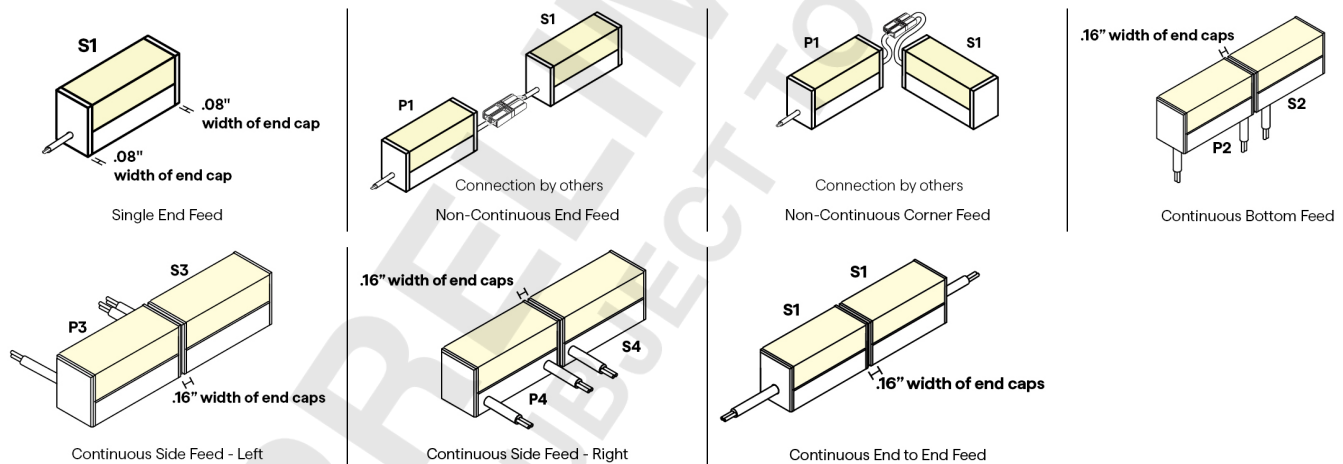




VERS-DROP (10) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

8 / 9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product.



BW
For WD
Bare Wire 36"
22 AWG



BW
For DW-HE
Bare Wire 36"
22 AWG




CON6/CON24
6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

10 WIRE COLOR



12 MOUNTING




CC
(CC-01)
Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01


Each clips comes with a #4 x 5/8" Flat Head screw.



MG
Magnet Clip

One MG provided per foot

To order separately use MG-02




MMA-02
Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02

Each clip comes with a #6 Flat Screw

Required when mounting to a non-magnetic surface




TBC-03
Plastic T-Bar Clip

Use on 9/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-03

Each pair of clips comes with M2.5 x 4mm set screw and Allen key




TBC-04
Plastic T-Bar Clip

Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-04

Each pair of clips comes with M2.5 x 4mm set screw and Allen key



TBC-05
Plastic T-Bar Clip

Use on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-05


Each pair of clips comes with M2.5 x 4mm set screw and Allen key



VERS-DROP (10) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

13 FINISH




Custom color available

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

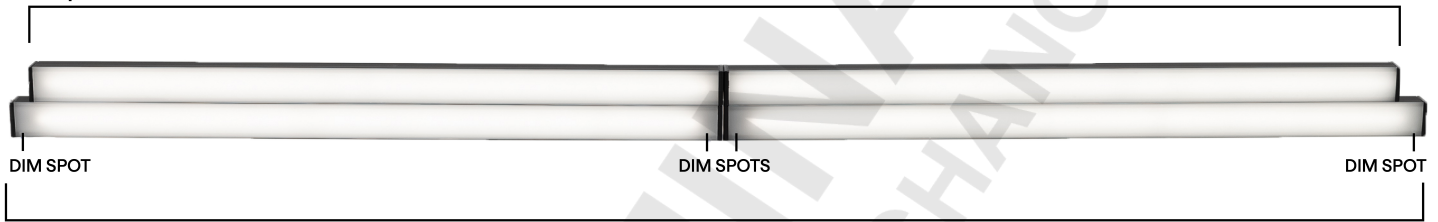

Exact Fixtures

WD DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1	S2	P1	P2	S3	S4	P3	P4
	End Feed	Bottom Feed	End Feed	Bottom Feed	Side Feed - Left	Side Feed - Right	Side Feed - Left	Side Feed - Right
12"		10.49"		10.74"		10.34"		10.44"
13"		12.49"		12.74"		12.34"		12.44"
14"		12.49"		12.74"		12.34"		12.44"
15"		14.49"		14.74"		14.34"		14.44"
16"		14.49"		14.74"		14.34"		14.44"
17"		16.49"		16.74"		16.34"		16.44"
18"		16.49"		16.74"		16.34"		16.44"
19"		18.49"		18.74"		18.34"		18.44"
20"		18.49"		18.74"		18.34"		18.44"
21"		20.49"		20.74"		20.34"		20.44"
22"		20.49"		20.74"		20.34"		20.44"
23"		22.49"		22.74"		22.34"		22.44"
24"		22.49"		22.74"		22.34"		22.44"
36"		34.49"		34.74"		34.34"		34.44"
48"		46.49"		46.74"		46.34"		46.44"
60"		58.49"		58.74"		58.34"		58.44"
72"		70.49"		70.74"		70.34"		70.44"
84"		82.49"		82.74"		82.34"		82.44"
96"		94.49"		94.74"		94.34"		94.44"



VERS-DROP (10) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed









WD WET LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2  S2 	P1 & P2  P2 	S3 & S4  S4 	P3 & P4  P4 
12"	10.69"	10.84"	10.59"	10.69"
13"	12.69"	12.84"	12.59"	12.69"
14"	12.69"	12.84"	12.59"	12.69"
15"	14.69"	14.84"	14.59"	14.69"
16"	14.69"	14.84"	14.59"	14.69"
17"	16.69"	16.84"	16.59"	16.69"
18"	16.69"	16.84"	16.59"	16.69"
19"	18.69"	18.84"	18.59"	18.69"
20"	18.69"	18.84"	18.59"	18.69"
21"	20.69"	20.84"	20.59"	20.69"
22"	20.69"	20.84"	20.59"	20.69"
23"	22.69"	22.84"	22.59"	22.69"
24"	22.69"	22.84"	22.59"	22.69"
36"	34.69"	34.84"	34.59"	34.69"
48"	46.69"	46.84"	46.59"	46.69"
60"	58.69"	58.84"	58.59"	58.69"
72"	70.69"	70.84"	70.59"	70.69"
84"	82.69"	82.84"	82.59"	82.69"
96"	94.69"	94.84"	94.59"	94.69"









DW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2  S2 	P1 & P2  P2 	S3 & S4  S4 	P3 & P4  P4 
12"	10.59"	10.94"	10.49"	10.59"
13"	12.59"	12.94"	12.49"	12.59"
14"	12.59"	12.94"	12.49"	12.59"
15"	14.59"	14.94"	14.49"	14.59"
16"	14.59"	14.94"	14.49"	14.59"
17"	16.59"	16.94"	16.49"	16.59"
18"	16.59"	16.94"	16.49"	16.59"
19"	18.59"	18.94"	18.49"	18.59"
20"	18.59"	18.94"	18.49"	18.59"
21"	20.59"	20.94"	20.49"	20.59"
22"	20.59"	20.94"	20.49"	20.59"
23"	22.59"	22.94"	22.49"	22.59"
24"	22.59"	22.94"	22.49"	22.59"
36"	34.59"	34.94"	34.49"	34.59"
48"	46.59"	46.94"	46.49"	46.59"
60"	58.59"	58.94"	58.49"	58.59"
72"	70.59"	70.94"	70.49"	70.59"
84"	82.59"	82.94"	82.49"	82.59"
96"	94.59"	94.94"	94.49"	94.59"



VERS-DROP (10) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DW-HE WET LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed IN	S2 Bottom Feed IN	P1 End Feed IN	P2 Bottom Feed IN	S3 Side Feed - Left IN	S4 Side Feed - Right IN	P3 Side Feed - Left IN	P4 Side Feed - Right IN
12"	10.74"		11.14"		10.64"		10.84"	
13"	12.74"		11.14"		12.64"		12.84"	
14"	12.74"		13.14"		12.64"		12.84"	
15"	14.74"		13.14"		14.64"		14.84"	
16"	14.74"		15.14"		14.64"		14.84"	
17"	16.74"		15.14"		16.64"		16.84"	
18"	16.74"		17.14"		16.64"		16.84"	
19"	18.74"		17.14"		18.64"		18.84"	
20"	18.74"		19.14"		18.64"		18.84"	
21"	20.74"		19.14"		20.64"		20.84"	
22"	20.74"		21.14"		20.64"		20.84"	
23"	22.74"		21.14"		22.64"		22.84"	
24"	22.74"		23.14"		22.64"		22.84"	
36"	34.74"		35.14"		34.64"		34.84"	
48"	46.74"		47.14"		46.64"		46.84"	
60"	58.74"		59.14"		58.64"		58.84"	
72"	70.74"		71.14"		70.64"		70.84"	
84"	82.74"		83.14"		82.64"		82.84"	
96"	94.74"		95.14"		94.64"		94.84"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT8	Q-SET+QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		





VERS-DROP (10) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QZ-DW	Q-SET-QZ-PH/0-10V QZ-PH/0-10V
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN		
ECO System		QTM-eLED(E)		
DMX If using DW LED, wattage must be doubled		QZ-DMX		QZ-DMX
DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QOM-eLED+DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6
DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8		Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M  1.41" .71" Adjustable mounting bracket - Medium	HINGE - HMB-L  1.46" 1.29" Adjustable mounting bracket - Large	HINGE - HMB-XL  4" 1.46" Adjustable mounting bracket - XLarge	Q-PIVOT  .75" 1.03" Small mounting accessory	Q-ANGLE  2.23" 1.38" Adjustable mounting accessory	NL-LARGE  L Mounting Bracket	SD-L-LARGE  L Mounting Bracket
--	--	---	--	--	--	---

COMPATIBLE WIRING ACCESSORIES

Q-mini-J  2" 1.25" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5  2.80" 2.27" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)
---	---



VERS-DROP (10) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage

PRELIMINARY
SUBJECT TO CHANGE