





VERS-DROP (10) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with lens




Profile with concealed clip




Profile with magnetic clip




Profile with magnet mount clip & magnetic mount accessory



Profile with TBC-03



Profile with TBC-04



Profile with TBC-05

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]
Tested with VERS-10-SW-**-30-DRY

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	120	98	144	98	269	98	269	98	253	98	317	98	526	98	691	98
DF	113	98	136	98	253	98	253	98	234	98	295	98	472	98	664	98

5 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





VERS-DROP (10) STATIC WHITE STANDARD


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


		1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT		9.0 HE W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	120°F	-4°F	120°F	-4°F	100°F
DMP	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	140°F	-4°F	125°F	-4°F	130°F	-4°F	120°F	-4°F	115°F	-4°F	115°F	-13°F	95°F
WET	Ambient Operating Temp - Surface	-4°F	135°F	—	—	-4°F	125°F	—	—	-4°F	120°F	-4°F	115°F	—	—	—	—

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

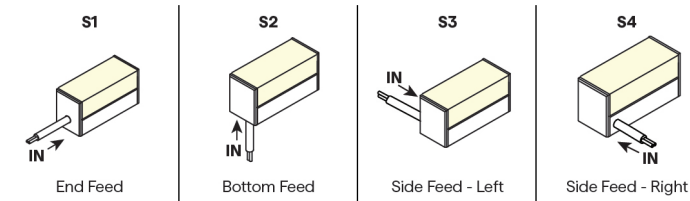

PASS THROUGH (Input/Output)

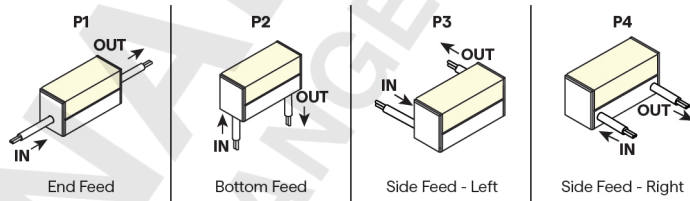

CONFIGURATION OPTIONS

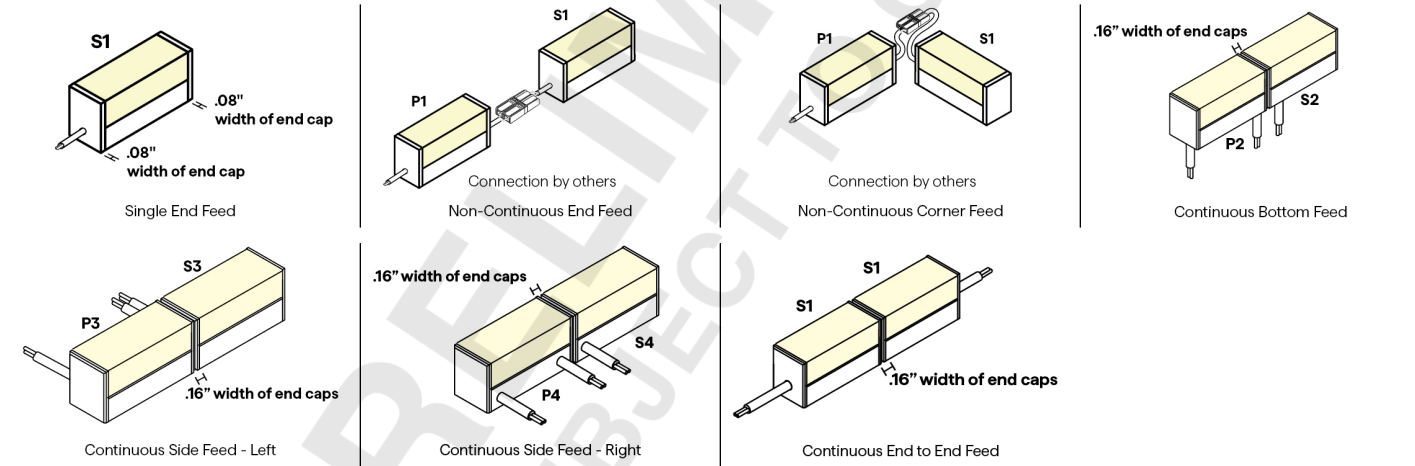




VERS-DROP (10) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed


8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.




Bare Wire 36"
Stranded 22 AWG

CON6/CON24




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

10 WIRE COLOR



12 MOUNTING

CC
(CC-01)



Concealed Clip

2 pieces of hardware provided for 4'
or less; 4 pieces of hardware
provided for greater than 4'

To order separately use CC-01

Each clips comes with a #4 x 5/8"
Flat Head screw.


MG



Magnet Clip

One MG provided per foot
To order separately use MG-02

MMA-02




Magnet Mount
Accessory for MG-02

Sold separately, to order use
MMA-02

Each clip comes with a #6 Flat
Screw

Required when mounting to a non-
magnetic surface

TBC-03



Plastic T-Bar Clip


Use on 9/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip
provided for each additional 12" or
less length

To order separately use TBC-03

Each pair of clips comes with M2.5 x
4mm set screw and Allen key

TBC-04



Plastic T-Bar Clip


Use on 15/16" Flat or Tegular Drop
Ceiling

2 clips provided for first 12"; 1 clip
provided for each additional 12" or
less length

To order separately use TBC-04

Each pair of clips comes with M2.5 x
4mm set screw and Allen key

TBC-05



Plastic T-Bar Clip

Use on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip
provided for each additional 12" or
less length

To order separately use TBC-05


Each pair of clips comes with M2.5 x
4mm set screw and Allen key



VERS-DROP (10) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed


13 FINISH



Custom color available

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

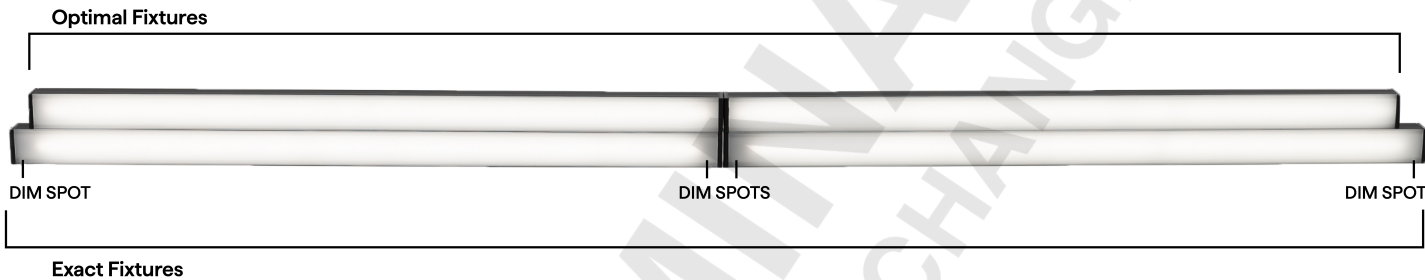

SW DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1	S2	P1	P2	S3	S4	P3	P4
	End Feed	Bottom Feed	End Feed	Bottom Feed	Side Feed - Left	Side Feed - Right	Side Feed - Left	Side Feed - Right
12"		11.49"		11.74"		11.34"		11.44"
13"		12.49"		12.74"		12.34"		12.44"
14"		13.49"		13.74"		13.34"		13.44"
15"		14.49"		14.74"		14.34"		14.44"
16"		15.49"		15.74"		15.34"		15.44"
17"		16.49"		16.74"		16.34"		16.44"
18"		17.49"		17.74"		17.34"		17.44"
19"		18.49"		18.74"		18.34"		18.44"
20"		19.49"		19.74"		19.34"		19.44"
21"		20.49"		20.74"		20.34"		20.44"
22"		21.49"		21.74"		21.34"		21.44"
23"		22.49"		22.74"		22.34"		22.44"
24"		23.49"		23.74"		23.34"		23.44"
36"		35.49"		35.74"		35.34"		35.44"
48"		47.49"		47.74"		47.34"		47.44"
60"		59.49"		59.74"		59.34"		59.44"
72"		71.49"		71.74"		71.34"		71.44"
84"		83.49"		83.74"		83.34"		83.44"
96"		95.49"		95.74"		95.34"		95.44"



VERS-DROP (10) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

SW WET LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed IN	S2 Bottom Feed IN	P1 End Feed IN	P2 Bottom Feed IN	S3 Side Feed - Left IN	S4 Side Feed - Right IN	P3 Side Feed - Left IN	P4 Side Feed - Right IN
12"								
13"	11.64"	12.64"	11.79"	12.79"	11.54"	12.54"	11.64"	12.64"
14"	13.64"	14.64"	13.79"	14.79"	13.54"	14.54"	13.64"	14.64"
15"	14.64"	15.64"	14.79"	15.79"	14.54"	15.54"	14.64"	15.64"
16"	15.64"	16.64"	15.79"	16.79"	15.54"	16.54"	15.64"	16.64"
17"	16.64"	17.64"	16.79"	17.79"	16.54"	17.54"	16.64"	17.64"
18"	17.64"	18.64"	17.79"	18.79"	17.54"	18.54"	17.64"	18.64"
19"	18.64"	19.64"	18.79"	19.79"	18.54"	19.54"	18.64"	19.64"
20"	19.64"	20.64"	19.79"	20.79"	19.54"	20.54"	19.64"	20.64"
21"	20.64"	21.64"	20.79"	21.79"	20.54"	21.54"	20.64"	21.64"
22"	21.64"	22.64"	21.79"	22.79"	21.54"	22.54"	21.64"	22.64"
23"	22.64"	23.64"	22.79"	23.79"	22.54"	23.54"	22.64"	23.64"
24"	23.64"	24.64"	23.79"	24.79"	23.54"	24.54"	23.64"	24.64"
36"	35.64"	36.64"	35.79"	36.79"	35.54"	36.54"	35.64"	36.64"
48"	47.64"	48.64"	47.79"	48.79"	47.54"	48.54"	47.64"	48.64"
60"	59.64"	60.64"	59.79"	60.79"	59.54"	60.54"	59.64"	60.64"
72"	71.64"	72.64"	71.79"	72.79"	71.54"	72.54"	71.64"	72.64"
84"	83.64"	84.64"	83.79"	84.79"	83.54"	84.54"	83.64"	84.64"
96"	95.64"	96.64"	95.79"	96.79"	95.54"	96.54"	95.64"	96.64"

SW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed IN	S2 Bottom Feed IN	P1 End Feed IN	P2 Bottom Feed IN	S3 Side Feed - Left IN	S4 Side Feed - Right IN	P3 Side Feed - Left IN	P4 Side Feed - Right IN
12"	10.49"	10.49"	10.74"	10.74"	10.34"	10.34"	10.44"	10.44"
13"	12.49"	12.49"	12.74"	12.74"	12.34"	12.34"	12.44"	12.44"
14"	12.49"	12.49"	12.74"	12.74"	12.34"	12.34"	12.44"	12.44"
15"	14.49"	14.49"	14.74"	14.74"	14.34"	14.34"	14.44"	14.44"
16"	14.49"	14.49"	14.74"	14.74"	14.34"	14.34"	14.44"	14.44"
17"	16.49"	16.49"	16.74"	16.74"	16.34"	16.34"	16.44"	16.44"
18"	16.49"	16.49"	16.74"	16.74"	16.34"	16.34"	16.44"	16.44"
19"	18.49"	18.49"	18.74"	18.74"	18.34"	18.34"	18.44"	18.44"
20"	18.49"	18.49"	18.74"	18.74"	18.34"	18.34"	18.44"	18.44"
21"	20.49"	20.49"	20.74"	20.74"	20.34"	20.34"	20.44"	20.44"
22"	20.49"	20.49"	20.74"	20.74"	20.34"	20.34"	20.44"	20.44"
23"	22.49"	22.49"	22.74"	22.74"	22.34"	22.34"	22.44"	22.44"
24"	22.49"	22.49"	22.74"	22.74"	22.34"	22.34"	22.44"	22.44"
36"	34.49"	34.49"	34.74"	34.74"	34.34"	34.34"	34.44"	34.44"
48"	46.49"	46.49"	46.74"	46.74"	46.34"	46.34"	46.44"	46.44"
60"	58.49"	58.49"	58.74"	58.74"	58.34"	58.34"	58.44"	58.44"
72"	70.49"	70.49"	70.74"	70.74"	70.34"	70.34"	70.44"	70.44"
84"	82.49"	82.49"	82.74"	82.74"	82.34"	82.34"	82.44"	82.44"
96"	94.49"	94.49"	94.74"	94.74"	94.34"	94.34"	94.44"	94.44"



VERS-DROP (10) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH IQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP IQ-PH IQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6	Q-SET+QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	



VERS-DROP (10) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M

Adjustable mounting bracket - Medium

HINGE - HMB-L

Adjustable mounting bracket - Large

HINGE - HMB-XL

Adjustable mounting bracket - XLarge

Q-PIVOT

Small mounting accessory

Q-ANGLE

Adjustable mounting accessory

NL-LARGE

L Mounting Bracket

SD-L-LARGE

L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

Q-mini-J5

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

CON120-EXT

10ft Con cable extender DRY/DMP/WET

CON FOUR-FER

Splits lead from one to four LED Con connectors DRY/DMP/WET

CON M - BARREL F

Male con to barrel cable adaptor DRY/DMP



VERS-DROP (10) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage

PRELIMINARY
SUBJECT TO CHANGE