



# VERS-FLUSH (02) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed



white optics®

UL LISTED

NEC  
Article 110 and 410.16  
Closest Rated up to 4.0W/ft

RoHS  
COMPLIANT

EPD  
VERIFIED

JA8-2016

1-BIN  
2-STEP

5 YEAR  
WARRANTY



BUY AMERICAN ACT

Declare.

Approved

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER
VERS-02-SW			DRY		

## ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/OPTIMAL

Sample Part Number: VERS-02-SD-5.0-30-DRY-DF-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E

<b>1</b> <b>PRODUCT</b>  VERS-02-SW  See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  2.0 2.0W/ft 4.0 4.0W/ft 6.0 6.0W/ft	<b>3</b> <b>CCT</b>  24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	<b>4</b> <b>RATED</b>  DRY IP20	<b>5</b> <b>LENS</b>  DF Diffused PR Polar  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	<b>6</b> <b>EXTERNAL LOUVER</b>  L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver  Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length.
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  SINGLE (Input only) S1 End Feed S2 Bottom Feed  When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black		
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  CC Concealed Clip MG Magnet TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver	<b>13</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze WH White CU Custom	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Suitable for installation in the storage area of a clothes closet when using wattage of 4.0W/ft or less



# VERS-FLUSH (02) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

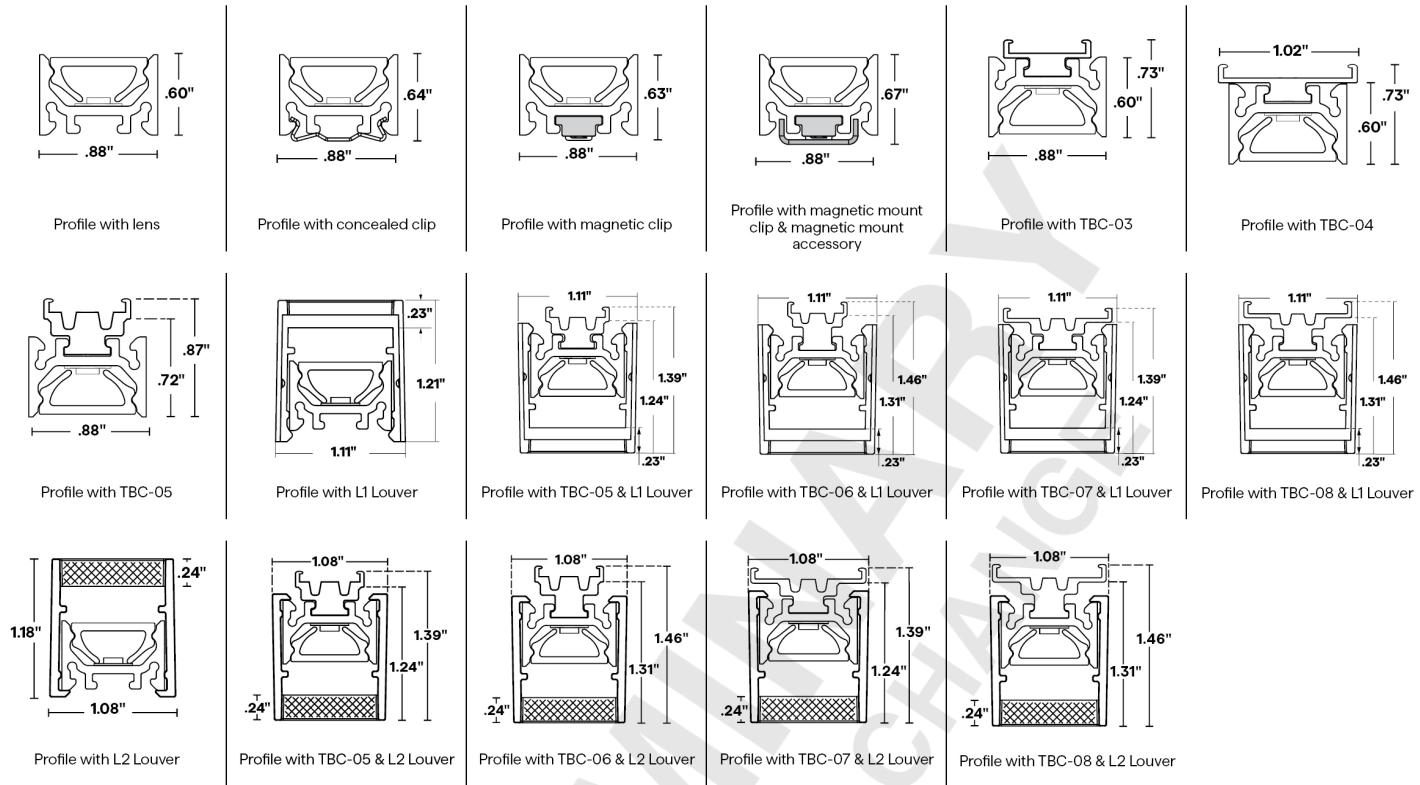

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]  
Tested with VERS-02-SW-\*\*-30-DRY

	1.5 W/FT	1.5HE W/FT	3.0 W/FT	3.0HE W/FT	4.0 W/FT	5.0 W/FT	6.0HE W/FT	9.0HE W/FT								
LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI							
PR	157	98	198	98	274	98	379	98	347	98	420	98	686	98	1022	98
DF	148	98	188	98	256	98	355	98	325	98	392	98	666	98	959	98

## 5 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





## VERS-FLUSH (02) STATIC WHITE STANDARD



24VDC Linear Fixtures - Surface & Recessed

### TEMPERATURE RATINGS


	DRY	15 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT		9.0 HE W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	120°F	-4°F	120°F	-4°F	100°F

### 6 EXTERNAL LOUVER

#### PLASTIC


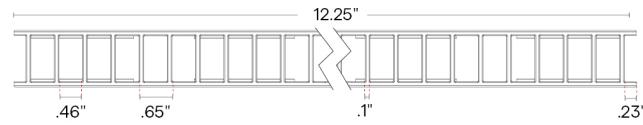


Lumen Multiplier  
WH BK  
0.70 0.54




Profile with plastic louver

#### METAL

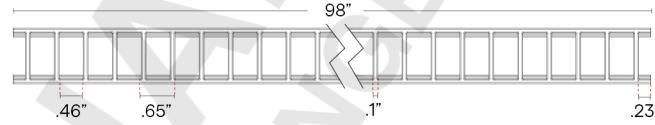



Lumen Multiplier  
WH BK ST  
0.64 0.39 0.59





Profile with metal louver

### 7 WIRE INPUT/OUTPUT

#### SINGLE (Input only)



#### PASS THROUGH (Input/Output)






# VERS-FLUSH (02) STATIC WHITE STANDARD


24VDC Linear Fixtures - Surface & Recessed

## CONFIGURATION OPTIONS

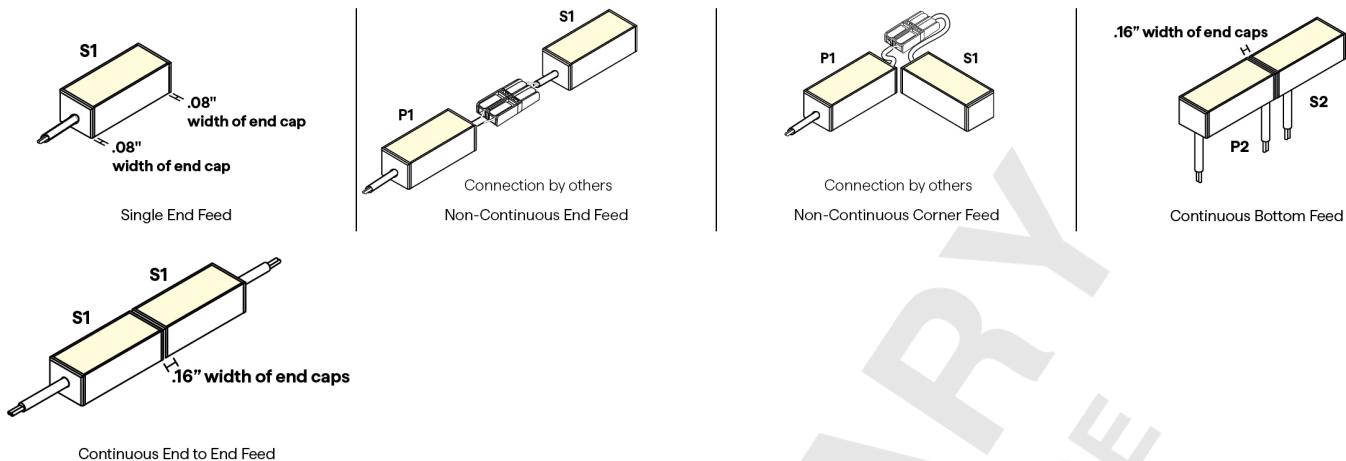


## 8 / 9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product.

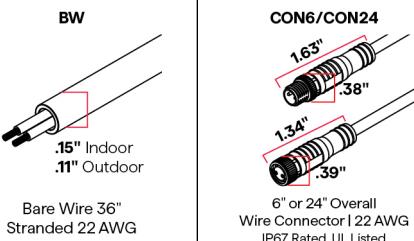

## 10 WIRE COLOR



## 12 MOUNTING

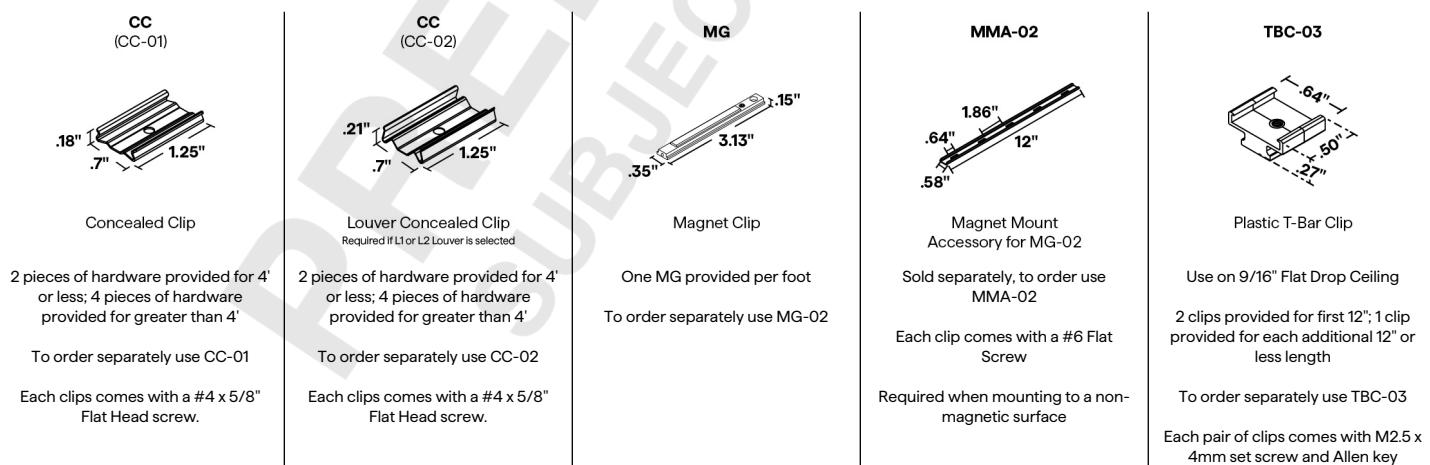




## VERS-FLUSH (02) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

### MOUNTING CONTINUED

TBC-04	TBC-05	TBC-06	TBC-07	TBC-08
Plastic T-Bar Clip				
Use on 15/16" Flat or Tegular Drop Ceiling	Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling	Use with Louver on 9/16" Tegular Drop Ceiling	Use with Louver on 15/16" Flat Drop Ceiling	Use with Louver on 15/16" Tegular Drop Ceiling
2 clips provided for first 12"; 1 clip provided for each additional 12" or less length	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length
To order separately use TBC-04	To order separately use TBC-05	To order separately use TBC-06	To order separately use TBC-07	To order separately use TBC-08
Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key

### 13 FINISH



Satin  
Black  
Bronze  
White

Custom color available

### 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





# VERS-FLUSH (02) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

## SW DRY LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"		11.49"		11.74"
13"		12.49"		12.74"
14"		13.49"		13.74"
15"		14.49"		14.74"
16"		15.49"		15.74"
17"		16.49"		16.74"
18"		17.49"		17.74"
19"		18.49"		18.74"
20"		19.49"		19.74"
21"		20.49"		20.74"
22"		21.49"		21.74"
23"		22.49"		22.74"
24"		23.49"		23.74"
36"		35.49"		35.74"
48"		47.49"		47.74"
60"		59.49"		59.74"
72"		71.49"		71.74"
84"		83.49"		83.74"
96"		95.49"		95.74"

## SW-HE DRY LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"		10.49"		10.74"
13"		12.49"		12.74"
14"		12.49"		12.74"
15"		14.49"		14.74"
16"		14.49"		14.74"
17"		16.49"		16.74"
18"		16.49"		16.74"
19"		18.49"		18.74"
20"		18.49"		18.74"
21"		20.49"		20.74"
22"		20.49"		20.74"
23"		22.49"		22.74"
24"		22.49"		22.74"
36"		34.49"		34.74"
48"		46.49"		46.74"
60"		58.49"		58.74"
72"		70.49"		70.74"
84"		82.49"		82.74"
96"		94.49"		94.74"



# VERS-FLUSH (02) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QT-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle



# VERS-FLUSH (02) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)	QTM-eLED(E)
DMX	QZ-DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b> 1.41" x .71"	<b>HINGE - HMB-L</b> 1.46" x 1.29"	<b>HINGE - HMB-XL</b> 1.46" x 4"	<b>Q-PIVOT</b> .75" x 1.03"	<b>Q-ANGLE</b> 1.38" x 2.23"	<b>NJ-LARGE</b> 	<b>NU-LARGE</b> 	<b>SD-J-LARGE</b> 	<b>BL-LARGE</b> 	<b>NL-LARGE</b> 
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	J Mounting Bracket	U Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket	L Mounting Bracket

**SD-L-LARGE**



L Mounting Bracket



## VERS-FLUSH (02) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

### COMPATIBLE WIRING ACCESSORIES



### COMPATIBLE CONTROL ACCESSORIES

#### SCENE APP DONGLE



Wi-Fi or Bluetooth  
Connectivity

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage

PRELIMINARY  
SUBJECT TO CHANGE