



# VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



white optics



ROHS  
COMPLIANT

EPD  
ENVIRONMENTAL  
PRODUCT DECLARATION

JAB-2019  
HE only

5 YEAR  
WARRANTY



Declare

- Optically enhanced VERSatile fixture with narrow grazing properties ranging from 12° to 36°
- The high-quality lens features a proprietary diffusing agent for superior beam control and clean edges
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER
VERS-04-DW					

Sample Part Number: VERS-04-DW-2.5HE-20/30-DRY-GZR-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/ OPTIMAL
<b>VERS-04-DW</b>  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE <b>4.0HE</b> 4.0W/ft HE	<b>20/27</b> 2000K/2700K <b>20/30</b> 2000K/3000K <b>27/40</b> 2700K/4000K <b>27/55</b> 2700K/5500K	<b>DRY</b> IP20	<b>25D</b> Optical 25° <b>GZR</b> Grazer	For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages								
	<b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE	<b>24/30</b> 2400K/3000K <b>27/40</b> 2700K/4000K	<b>DMP</b> IP54 <b>PENC</b> IP67	PENC-partially encapsulated: N/A for TBC clips	Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.								
	<b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE	<b>20/27</b> 2000K/2700K <b>20/30</b> 2000K/3000K <b>27/40</b> 2700K/4000K <b>27/55</b> 2700K/5500K	<b>WET</b> IP67										
<b>7 WIRE INPUT/OUTPUT</b>  <b>SINGLE (Input only)</b> <b>S1</b> End Feed <b>S2</b> Bottom Feed <b>S3</b> Left Side Feed <b>S4</b> Right Side Feed  When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	<b>8 CONNECTOR/WIRE IN</b>  <b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9 CONNECTOR/WIRE OUT</b>  <b>CLS</b> Closed End (No feed)	<b>10 WIRE COLOR</b>  <b>WH</b> White <b>BK</b> Black										
<b>PASS THROUGH (Input/output)</b> <b>P1</b> End Feed <b>P2</b> Bottom Feed <b>P3</b> Left Side Feed <b>P4</b> Right Side Feed  Pass Through options are not available for PENC rating. When using TBC Mounting, a bare wire P2 wire feed is recommended. See install instructions for details.	<b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)											
<b>11 WIRE TYPE</b>  <b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated  CL2P only available with bare wire leads (BW)	<b>12 MOUNTING</b>  <b>CC</b> Concealed Clip <b>MG</b> Magnet <b>TBC-03</b> 9/16" Flat TB-Grid <b>TBC-04</b> 15/16" Flat or Tegular TB-Grid <b>TBC-05</b> 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver <b>TBC-06</b> 9/16" Tegular TB-Grid, with External Louver <b>TBC-07</b> 15/16" Flat TB-Grid, with External Louver <b>TBC-08</b> 15/16" Tegular TB-Grid, with External Louver	<b>13 FINISH</b>  <b>ST</b> Satin <b>BK</b> Black <b>BZ</b> Bronze <b>WH</b> White <b>CU</b> Custom  White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory.	<b>14 LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15 EXACT/ OPTIMAL</b>  <b>O</b> Optimal Illumination <b>E</b> Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dead spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.									


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

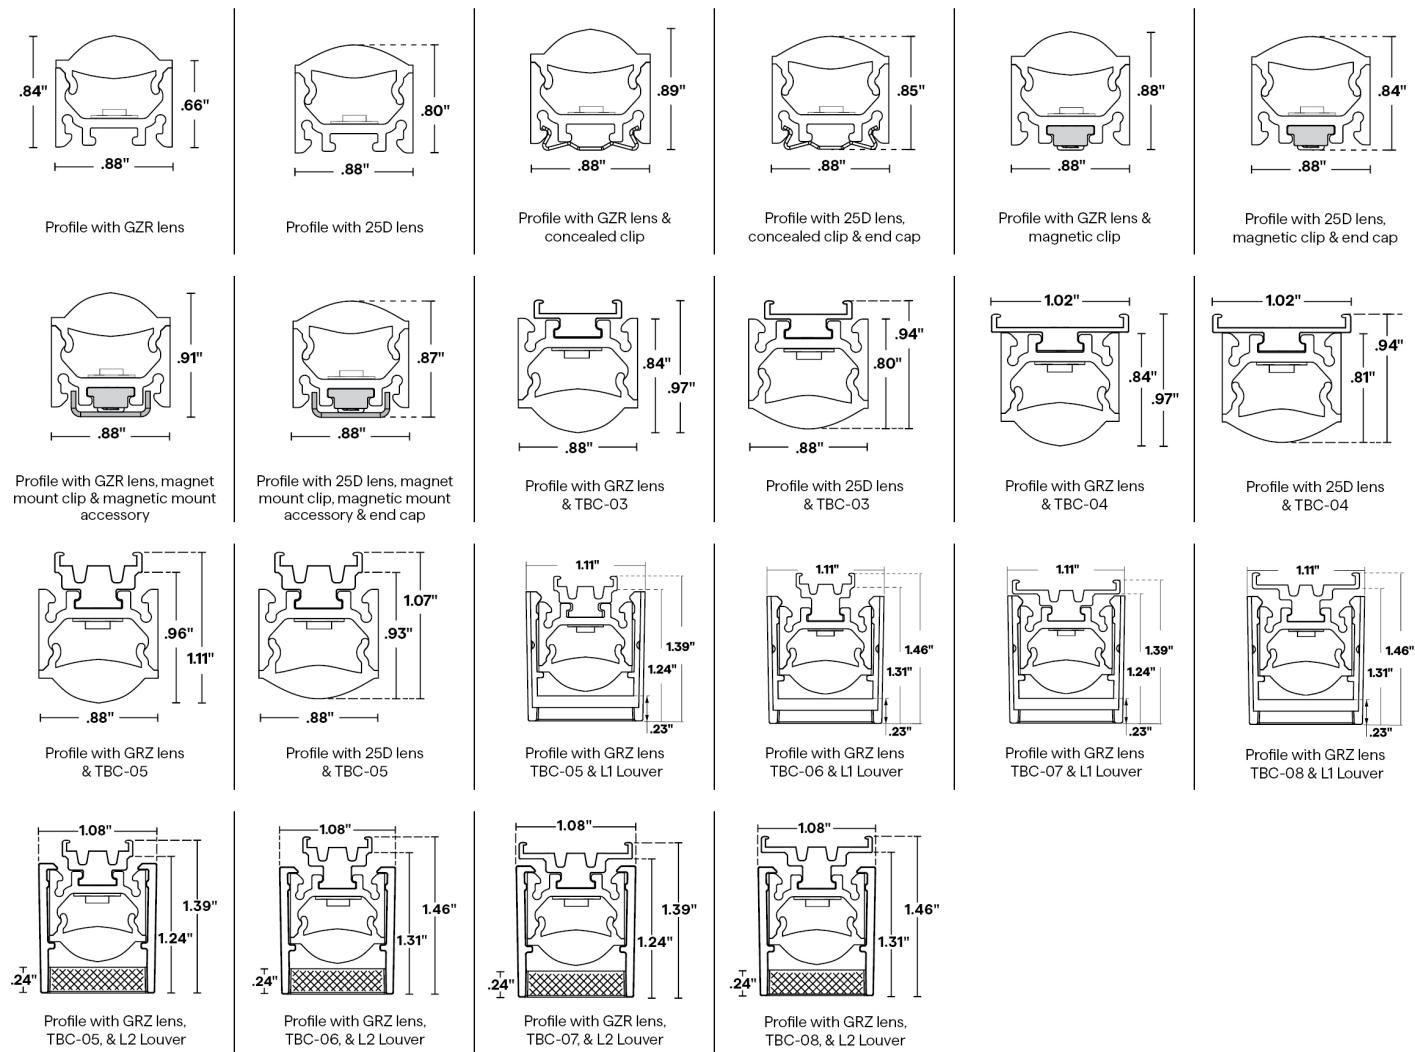

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with VERS-04-DW-\*\*-\*\*-DRY

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
GZR	169	98	266	98	411	98
25D	162	98	256	98	385	98



# VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 5 DIODE VISIBILITY





Optical lens



GZR - Grazer lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





## TEMPERATURE RATINGS

		DW 1.5 HE W/FT				DW 2.5 HE W/FT				DW 4.0 HE W/FT			
		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	110°F
DMP	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—
WET	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—
PENC	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F	—	—	—	—

## 6 EXTERNAL LOUVER


### PLASTIC

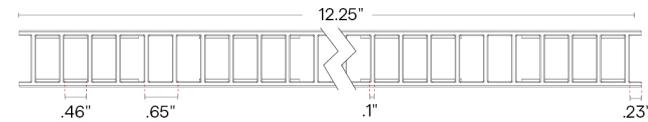

Lumen Multiplier  
WH BK





0.71 0.48




Profile with plastic louver

### METAL

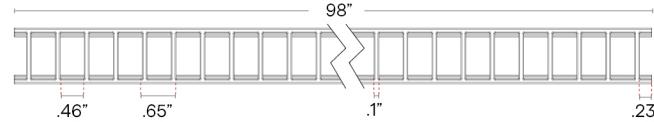

Lumen Multiplier  
WH BK ST



Profile with metal louver




# VERS-GRAZER (04) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

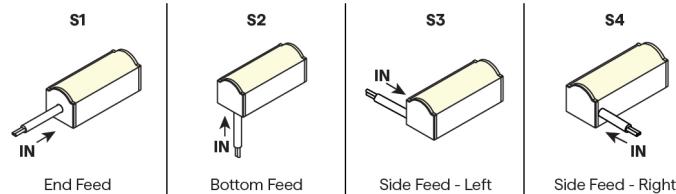


PASS THROUGH (Input/Output)

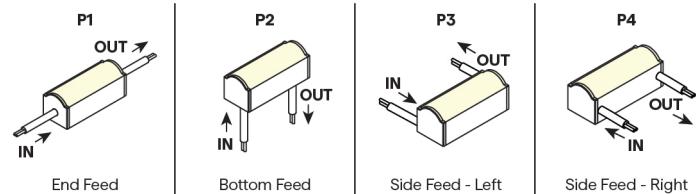


## CONFIGURATION OPTIONS

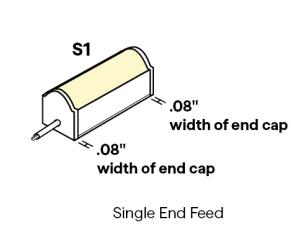


Single End Feed

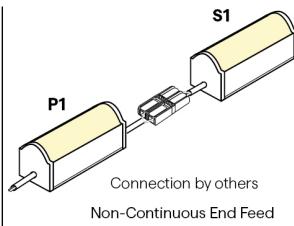


Non-Continuous End Feed

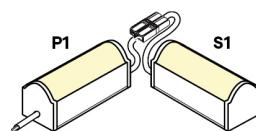


Non-Continuous Corner Feed




Continuous Bottom Feed



Continuous Side Feed - Left

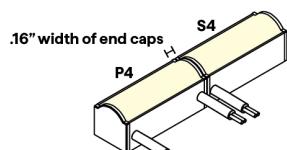


Continuous Side Feed - Right

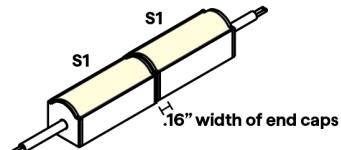

Continuous End to End Feed

## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.



Bare Wire 36"  
22 AWG



6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

## 10 WIRE COLOR



White










Black



# VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 12 MOUNTING

 <p><b>CC (CC-01)</b></p> <p>Concealed Clip</p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-01</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p>	 <p><b>CC (CC-02)</b></p> <p>Louver Concealed Clip Required if L1 or L2 Louver is selected</p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-02</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p>	 <p><b>MG</b></p> <p>Magnet Clip</p> <p>One MG provided per foot</p> <p>To order separately use MG-02</p>	 <p><b>MMA-02</b></p> <p>Magnet Mount Accessory for MG-02</p> <p>Sold separately, to order use MMA-02</p> <p>Each clip comes with a #6 Flat Screw</p> <p>Required when mounting to a non-magnetic surface</p>	 <p><b>TBC-03</b></p> <p>Plastic T-Bar Clip</p> <p>Use on 9/16" Flat Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length</p> <p>To order separately use TBC-03</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>
 <p><b>TBC-04</b></p> <p>Plastic T-Bar Clip</p> <p>Use on 15/16" Flat or Tegular Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length</p> <p>To order separately use TBC-04</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p><b>TBC-05</b></p> <p>Plastic T-Bar Clip</p> <p>Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length</p> <p>To order separately use TBC-05</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p><b>TBC-06</b></p> <p>Plastic T-Bar Clip</p> <p>Use with Louver on 9/16" Tegular Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length</p> <p>To order separately use TBC-06</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p><b>TBC-07</b></p> <p>Plastic T-Bar Clip</p> <p>Use with Louver on 15/16" Flat Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length</p> <p>To order separately use TBC-07</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p><b>TBC-08</b></p> <p>Plastic T-Bar Clip</p> <p>Use with Louver on 15/16" Tegular Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length</p> <p>To order separately use TBC-08</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>

## 13 FINISH



Satin

Black

Bronze

White

Custom color available




# VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

### Optimal Fixtures

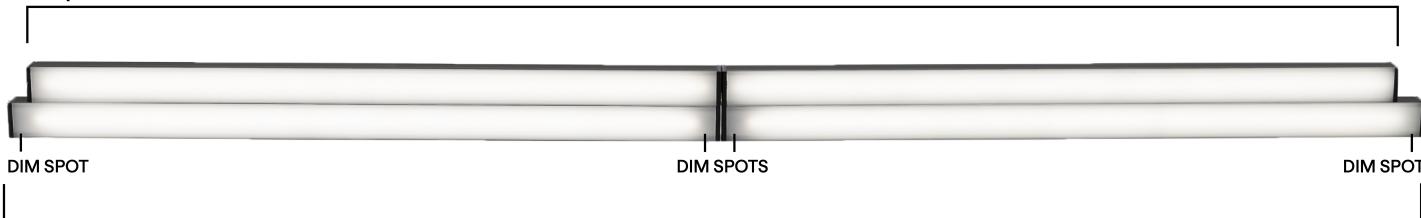

### Exact Fixtures

## DW-HE DRY, DMP, PENC LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.59"	10.94"	10.49"	10.59"
13"	12.59"	12.94"	12.49"	12.59"
14"	12.59"	12.94"	12.49"	12.59"
15"	14.59"	14.94"	14.49"	14.59"
16"	14.59"	14.94"	14.49"	14.59"
17"	16.59"	16.94"	16.49"	16.59"
18"	16.59"	16.94"	16.49"	16.59"
19"	18.59"	18.94"	18.49"	18.59"
20"	18.59"	18.94"	18.49"	18.59"
21"	20.59"	20.94"	20.49"	20.59"
22"	20.59"	20.94"	20.49"	20.59"
23"	22.59"	22.94"	22.49"	22.59"
24"	22.59"	22.94"	22.49"	22.59"
36"	34.59"	34.94"	34.49"	34.59"
48"	46.59"	46.94"	46.49"	46.59"
60"	58.59"	58.94"	58.49"	58.59"
72"	70.59"	70.94"	70.49"	70.59"
84"	82.59"	82.94"	82.49"	82.59"
96"	94.59"	94.94"	94.49"	94.59"



# VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## DW-HE WET LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.74"		11.14"		10.64"		10.84"	
13"	12.74"		11.14"		12.64"		12.84"	
14"	12.74"		13.14"		12.64"		12.84"	
15"	14.74"		13.14"		14.64"		14.84"	
16"	14.74"		15.14"		14.64"		14.84"	
17"	16.74"		15.14"		16.64"		16.84"	
18"	16.74"		17.14"		16.64"		16.84"	
19"	18.74"		17.14"		18.64"		18.84"	
20"	18.74"		19.14"		18.64"		18.84"	
21"	20.74"		19.14"		20.64"		20.84"	
22"	20.74"		21.14"		20.64"		20.84"	
23"	22.74"		21.14"		22.64"		22.84"	
24"	22.74"		23.14"		22.64"		22.84"	
36"	34.74"		35.14"		34.64"		34.84"	
48"	46.74"		47.14"		46.64"		46.84"	
60"	58.74"		59.14"		58.64"		58.84"	
72"	70.74"		71.14"		70.64"		70.84"	
84"	82.74"		83.14"		82.64"		82.84"	
96"	94.74"		95.14"		94.64"		94.84"	

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED-TW-AWN QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	




# VERS-GRAZER (04) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
<b>DMX</b> LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
<b>DALI-2: DT6</b> LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
<b>DALI-2: DT8</b> LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8
<b>SCENE App Dimmed</b>	Non-Dim Power Supply with TW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES

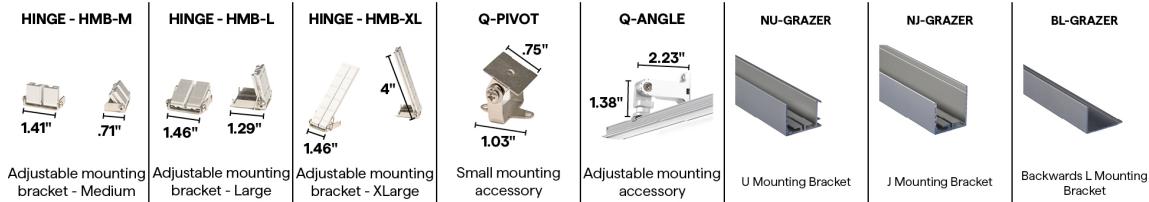

## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity



## VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

---

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage