




VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



- Optically enhanced VERSatile fixture with narrow grazing properties ranging from 12° to 36°
- The high-quality lens features a proprietary diffusing agent for superior beam control and clean edges
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control



INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/FT	CCT	RATED	LENS	EXTERNAL LOUVER

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL

Sample Part Number: **VERS-04-DW-2.5HE-20/30-DRY-GZR-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E**

1 PRODUCT VERS-04-DW VERS-04-DW-USA Select USA option for BAA and BABA projects. Only DRY, PENC, or WET ratings apply. LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	2 WATTS/FT 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	3 CCT 20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K 24/30 2400K/3000K 27/40 2700K/4000K 20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K	4 RATED DRY IP20 DMP IP54 PENC IP67 WET IP67 PENC - partially encapsulated; N/A for TBC clips	5 LENS 25D Optical 25° GZR Grazer For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	6 EXTERNAL LOUVER L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.
7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details. PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed P3 Left Side Feed P4 Right Side Feed Pass Through options are not available for PENC rating. When using TBC Mounting, a bare wire P2 wire feed is recommended. See install instructions for details.	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48) BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	10 WIRE COLOR WH White BK Black		
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING CC Concealed Clip MG Magnet TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver	13 FINISH ST Satin BK Black BZ Bronze WH White CU Custom White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory.	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with GZR lens




Profile with 25D lens




Profile with GZR lens & concealed clip




Profile with 25D lens, concealed clip & end cap




Profile with GZR lens & magnetic clip




Profile with 25D lens, magnetic clip & end cap




Profile with GZR lens, magnet mount clip & magnetic mount accessory




Profile with 25D lens, magnet mount clip, magnetic mount accessory & end cap




Profile with GRZ lens & TBC-03




Profile with 25D lens & TBC-03




Profile with GRZ lens & TBC-04




Profile with 25D lens & TBC-04




Profile with GRZ lens & TBC-05




Profile with 25D lens & TBC-05




Profile with GRZ lens TBC-05 & L1 Louver




Profile with GRZ lens TBC-06 & L1 Louver




Profile with GRZ lens TBC-07 & L1 Louver




Profile with GRZ lens TBC-08 & L1 Louver




Profile with GRZ lens, TBC-05, & L2 Louver



Profile with GRZ lens, TBC-06, & L2 Louver



Profile with GZR lens, TBC-07, & L2 Louver



Profile with GRZ lens, TBC-08, & L2 Louver

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]

Tested with VERS-04-DW-**-**-DRY

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
GZR	169	98	266	98	411	98
25D	162	98	256	98	385	98



VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


5 DIODE VISIBILITY



Optical lens
GZR - Grazer lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



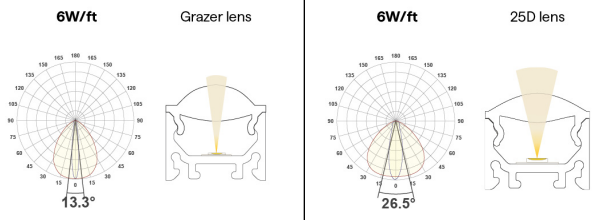


TEMPERATURE RATINGS

		DW 1.5 HE W/FT				DW 2.5 HE W/FT				DW 4.0 HE W/FT			
		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	110°F
DMP	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—
WET	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—
PENC	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F	—	—	—	—

6 EXTERNAL LOUVER

PLASTIC



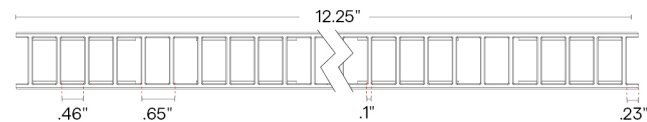


Profile with plastic louver

Lumen Multiplier

WH	BK
0.71	0.48

METAL

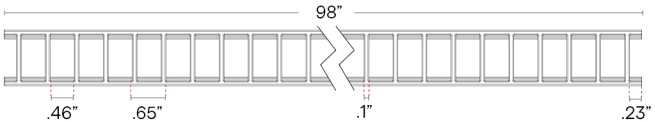

Profile with metal louver

Lumen Multiplier

WH	BK	ST
0.72	0.53	0.68




VERS-GRAZER (04) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

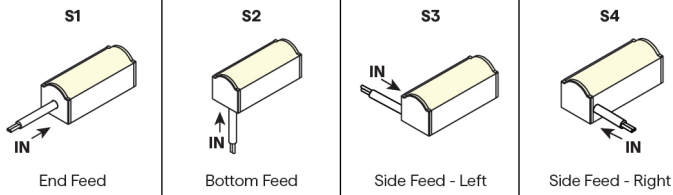

PASS THROUGH (Input/Output)

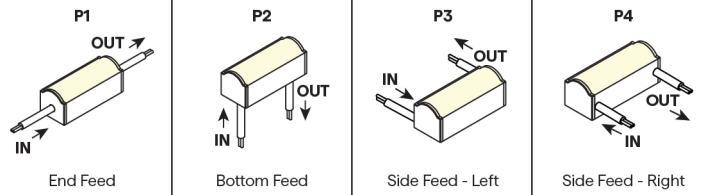


CONFIGURATION OPTIONS

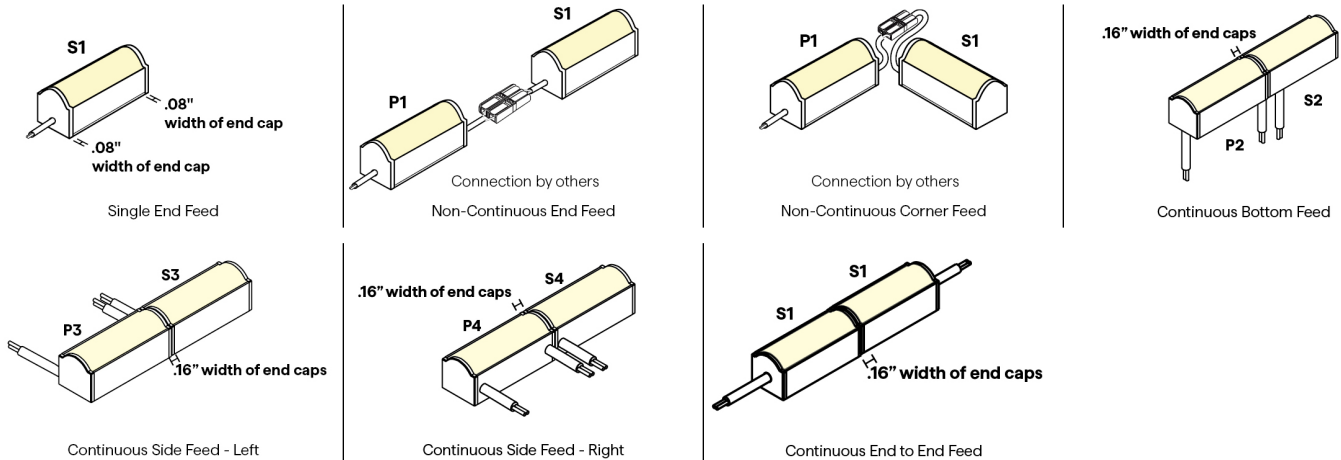

8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.

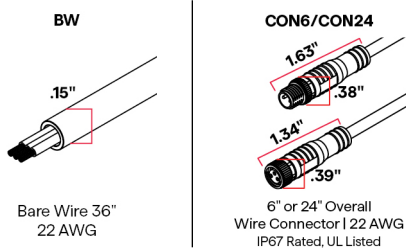

10 WIRE COLOR






VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

12 MOUNTING

CC
(CC-01)



Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01

Each clips comes with a #4 x 5/8" Flat Head screw.

CC
(CC-02)



Louver Concealed Clip
Required if L1 or L2 Louver is selected

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-02

Each clips comes with a #4 x 5/8" Flat Head screw.


MG



Magnet Clip

One MG provided per foot
To order separately use MG-02

MMA-02




Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02

Each clip comes with a #6 Flat Screw

Required when mounting to a non-magnetic surface

TBC-03



Plastic T-Bar Clip


Use on 9/16" Flat Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-03

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-04



Plastic T-Bar Clip


Use on 15/16" Flat or Tegular Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-04

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-05



Plastic T-Bar Clip


Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-05

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-06



Plastic T-Bar Clip


Use with Louver on 9/16" Tegular Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-06

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-07



Plastic T-Bar Clip


Use with Louver on 15/16" Flat Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-07

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-08



Plastic T-Bar Clip


Use with Louver on 15/16" Tegular Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-08

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

13 FINISH



Satin

Black

Bronze

White

Custom finishes require a longer lead time, consult factory




VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

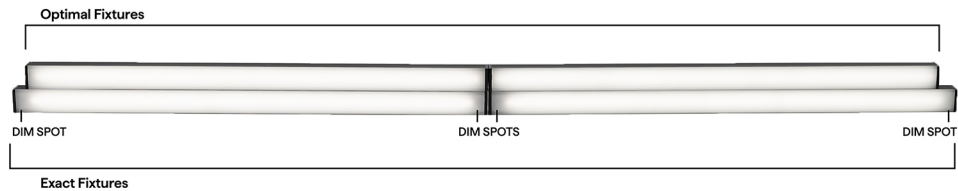

DW-HE DRY, DMP, PENC LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 IN End Feed	S2 IN Bottom Feed	P1 IN End Feed	P2 IN Bottom Feed	S3 IN Side Feed - Left	S4 IN Side Feed - Right	P3 IN Side Feed - Left	P4 IN Side Feed - Right
12"		10.59"		10.94"		10.49"		10.59"
13"		12.59"		12.94"		12.49"		12.59"
14"		12.59"		12.94"		12.49"		12.59"
15"		14.59"		14.94"		14.49"		14.59"
16"		14.59"		14.94"		14.49"		14.59"
17"		16.59"		16.94"		16.49"		16.59"
18"		16.59"		16.94"		16.49"		16.59"
19"		18.59"		18.94"		18.49"		18.59"
20"		18.59"		18.94"		18.49"		18.59"
21"		20.59"		20.94"		20.49"		20.59"
22"		20.59"		20.94"		20.49"		20.59"
23"		22.59"		22.94"		22.49"		22.59"
24"		22.59"		22.94"		22.49"		22.59"
36"		34.59"		34.94"		34.49"		34.59"
48"		46.59"		46.94"		46.49"		46.59"
60"		58.59"		58.94"		58.49"		58.59"
72"		70.59"		70.94"		70.49"		70.59"
84"		82.59"		82.94"		82.49"		82.59"
96"		94.59"		94.94"		94.49"		94.59"



VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed









DW-HE WET LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1  End Feed	S2  Bottom Feed	P1  End Feed	P2  Bottom Feed	S3  Side Feed - Left	S4  Side Feed - Right	P3  Side Feed - Left	P4  Side Feed - Right
12"	10.74"		11.14"		10.64"		10.84"	
13"	12.74"		11.14"		12.64"		12.84"	
14"	12.74"		13.14"		12.64"		12.84"	
15"	14.74"		13.14"		14.64"		14.84"	
16"	14.74"		15.14"		14.64"		14.84"	
17"	16.74"		15.14"		16.64"		16.84"	
18"	16.74"		17.14"		16.64"		16.84"	
19"	18.74"		17.14"		18.64"		18.84"	
20"	18.74"		19.14"		18.64"		18.84"	
21"	20.74"		19.14"		20.64"		20.84"	
22"	20.74"		21.14"		20.64"		20.84"	
23"	22.74"		21.14"		22.64"		22.84"	
24"	22.74"		23.14"		22.64"		22.84"	
36"	34.74"		35.14"		34.64"		34.84"	
48"	46.74"		47.14"		46.64"		46.84"	
60"	58.74"		59.14"		58.64"		58.84"	
72"	70.74"		71.14"		70.64"		70.84"	
84"	82.74"		83.14"		82.64"		82.84"	
96"	94.74"		95.14"		94.64"		94.84"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	



VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
O-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M

Adjustable mounting bracket - Medium

HINGE - HMB-L

Adjustable mounting bracket - Large

HINGE - HMB-XL

Adjustable mounting bracket - XLarge

Q-PIVOT

Small mounting accessory

Q-ANGLE

Adjustable mounting accessory

NU-GRAZER

U Mounting Bracket

NJ-GRAZER

J Mounting Bracket

BL-GRAZER

Backwards L Mounting Bracket

MMA-02

Magnet Mount Accessory for MG-02

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE

Wi-Fi or Bluetooth Connectivity



VERS-GRAZER (04) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage